°bloc

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne

GERMAN DESIGN AWARD SPECIAL 2019

°bloc.spot, walnut & brass brushed & °bloc, walnut & white carrara
House, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)

°**bloc.spot** (oak) & °**bloc** (carrara)

°bloc.stripe, brushed & °BLOC walnut / Apartment, Lithuania - architect Intersea Studio

°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten

°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC

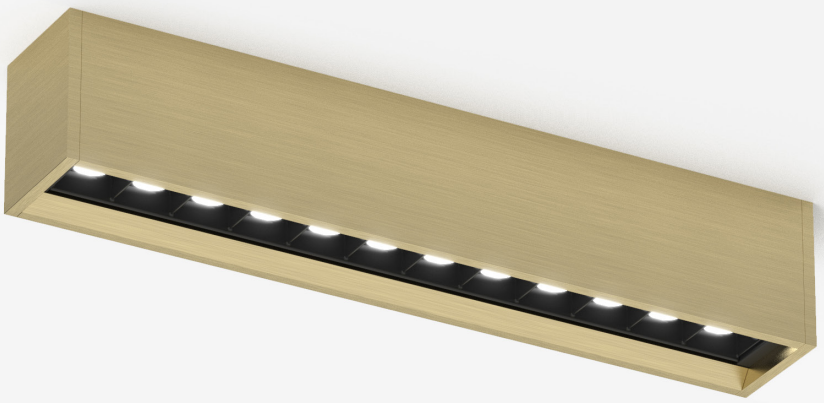

°bloc.spot monopoint - brass anodisded aluminum brushed

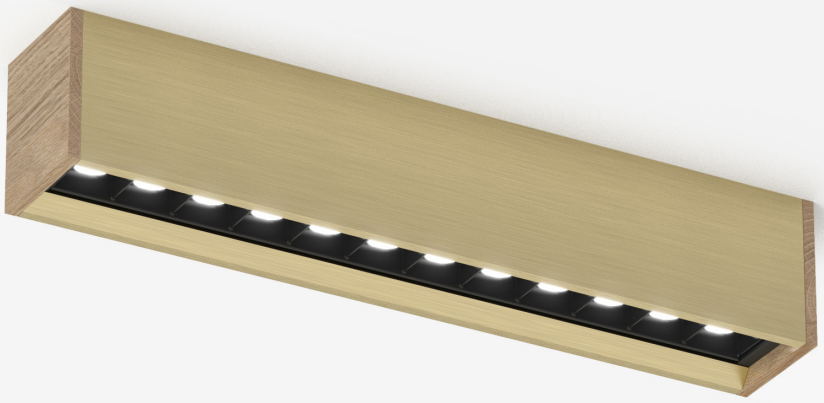

°bloc.spot monopoint - brass anodisded with oak caps

°BLOC.STRIPE brass brushed & °BLOC walnut

House Aalst, Belgium - architect Pascal François - photograph by Jeroen Verrecht

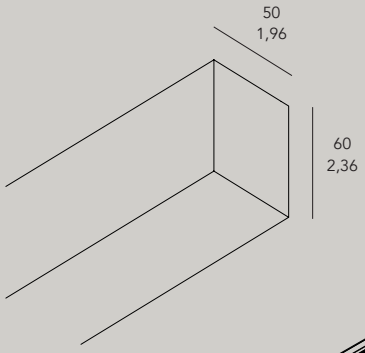

set-up guide



track



bloc spot
300 - 11.81
20° or 40°, both with a black anti-glare louvre



bloc stripe
300 - 11.81
frosted ice or microprism diffuser

bloc stripe
600 - 23.62
frosted ice or microprism diffuser



bloc
300 - 11.81



bloc
600 - 23.62

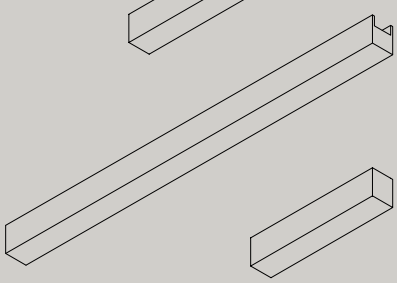

bloc
900 - 35.43

bloc end
300 - 11.81

bloc end
600 - 23.62

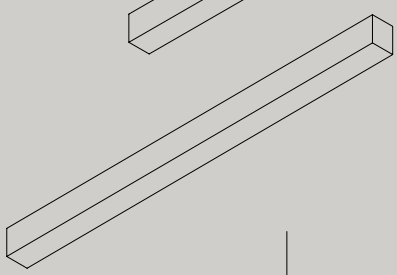

bloc end
900 - 35.43

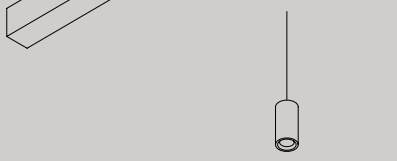

bloc bevel
55x110
2.16x4.33

Accessories

20252.0000 bloc track pendant 2 m cable suspension (incl cable)
20253.0000 bloc track pendant 2 m cable suspension
20254.0000 bloc track pendant 2 m bar suspension (incl cable)
20255.0000 bloc track pendant 2 m bar suspension

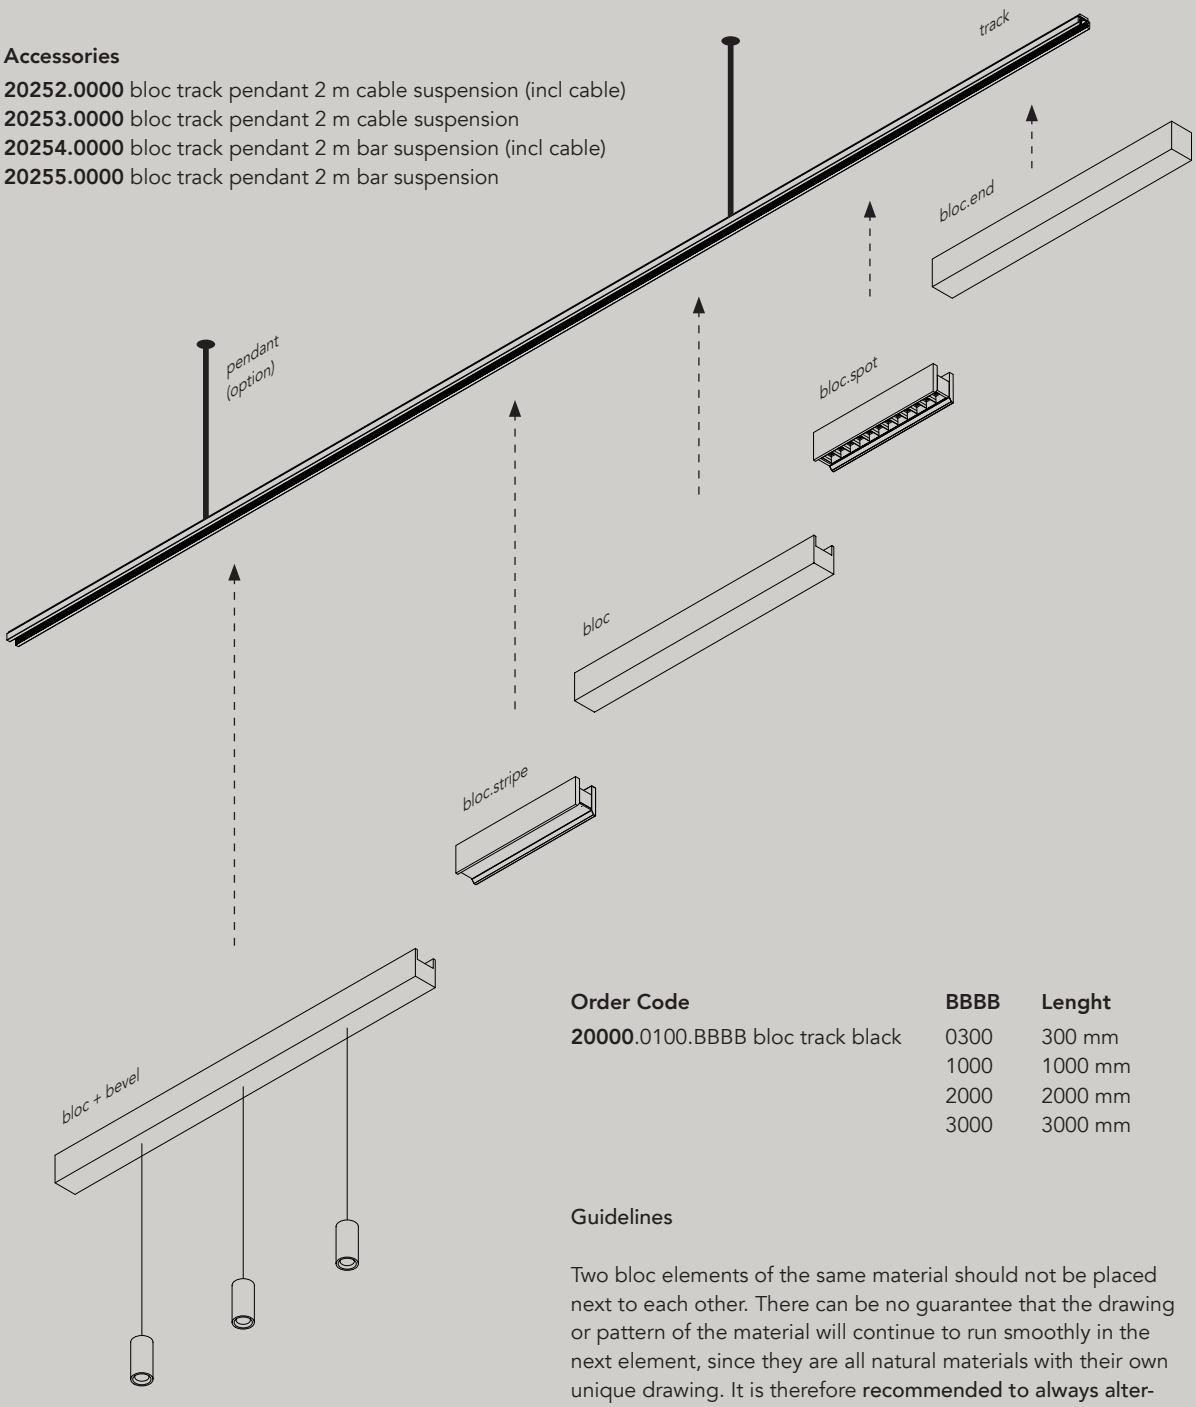

Order Code	BBBB	Lenght
20000.0100.BBBB bloc track black	0300	300 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

Guidelines

Two bloc elements of the same material should not be placed next to each other. There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing. It is therefore **recommended to always alternate between the materials**.

A bloc.stripe or a bloc.spot should be placed between two elements without light (full material). **It is recommended not to place two elements with light next to each other.**

A bloc.spot or bloc.stripe should never be used at the end of the track, unless the end of the track fits against a wall.

°bloc.spot

materials	aluminium coated or anodised / PC
weight	from 0,5-5kg
voltage	48 Vdc
ugr	<10
wattage	13W - 26W (high output)
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa*

*from Q3 2020

IP20

°bloc spot - brass alu anodised brushed + carrara bianco



Order Code

20300.AA00.BBBB.CCC.DD bloc stripe 300
20301.AA00.BBBB.CCC.DD bloc stripe 300 high output
20302.AA00.BBBB.CCC.DD bloc stripe 300 monopoint
20303.AA00.BBBB.CCC.DD bloc stripe 300 monopint high output

natural alu anodised brushed + oak intense black dye

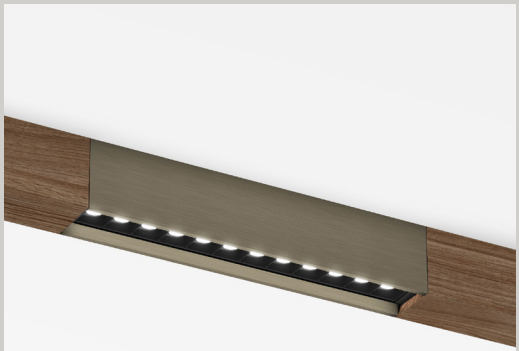

bronze alu anodised brushed + oak classic brown dye

AA	Finish	
01	black	
02	white	
21	black alu anodised brushed	
22	natural alu anodised brushed	
23	brass alu anodised brushed	
25	bronze alu anodised brushed	
26	dark bronze alu anodised brushed	
30	brass brushed	on request
31	brass polished	on request
40	walnut, natural waxed	on request
41	oak natural, natural waxed	on request
42	oak classic brown dye	on request
43	oak intense black dye	on request
61	carrara bianco extra, honed	on request

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc.stripe

materials	aluminium coated or anodised / PC
weight	from 0,5-5kg
voltage	48 Vdc
wattage	8,2W - 16,4W (high output)
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa*

*from Q3 2020

IP20

°bloc stripe 300 - brass alu anodised brushed + natural oak

°bloc stripe 600 - brass alu anodised brushed + carrara bianco



Order Code

20400.AA00.BBBB.CCC.DD bloc stripe 300
20401.AA00.BBBB.CCC.DD bloc stripe 300 high output
20402.AA00.BBBB.CCC.DD bloc stripe 300 monopoint
20403.AA00.BBBB.CCC.DD bloc stripe 300 monopint high output

20410.AA00.BBBB.CCC.DD bloc stripe 600
20411.AA00.BBBB.CCC.DD bloc stripe 600 high output
20412.AA00.BBBB.CCC.DD bloc stripe 600 monopoint
20413.AA00.BBBB.CCC.DD bloc stripe 600 monopint high output

natural alu anodised brushed + oak intense black dye

bronze alu anodised brushed + oak classic brown dye

AA	Finish	
01	black	
02	white	
21	black alu anodised brushed	
22	natural alu anodised brushed	
23	brass alu anodised brushed	
25	bronze alu anodised brushed	
26	dark bronze alu anodised brushed	
30	brass brushed	on request
31	brass polished	on request
40	walnut, natural waxed	on request
41	oak natural, natural waxed	on request
42	oak classic brown dye	on request
43	oak intense black dye	on request
61	carrara bianco extra, honed	on request

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted nice	880lm - 310cd	1610lm - 560cd
002	microprism	780lm - 370cd	1430lm - 680cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc

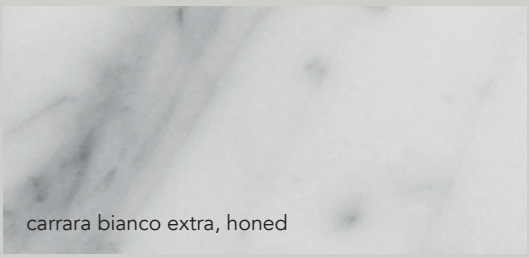
carrara bianco extra, honed

walnut, natural waxed

natural alu anodised

brass alu anodised

bronze alu anodised

dark bronze alu anodised

black alu anodised

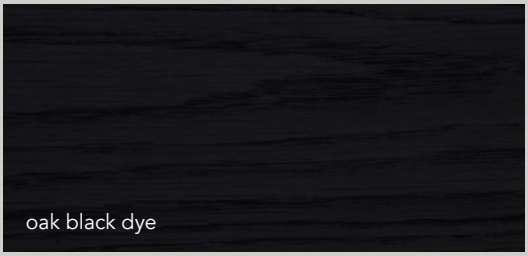
oak black dye

oak natural, natural waxed

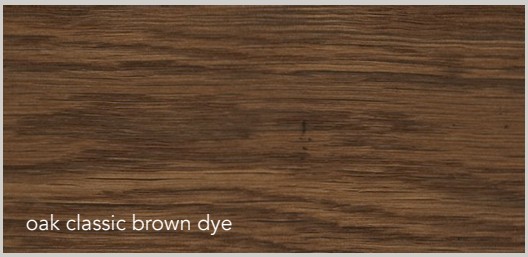
oak classic brown dye

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

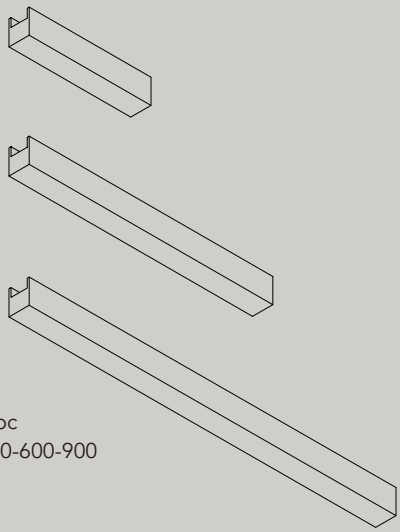

bloc
300-600-900

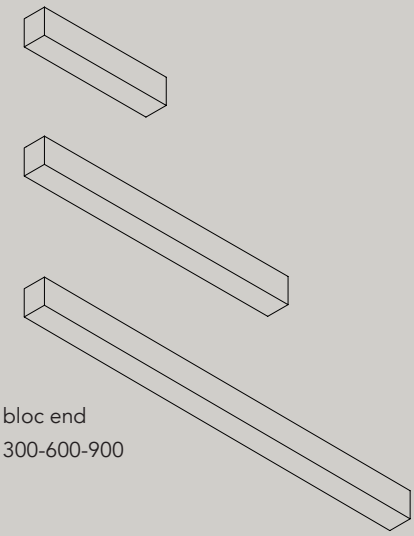

bloc end
300-600-900

Order Code

20600.AA00 bloc 300
20610.AA00 bloc 600
20620.AA00 bloc 900

20601.AA00 bloc 300 end
20611.AA00 bloc 600 end
20621.AA00 bloc 900 end

20602.AA00 bloc 300 end, incl. driver 100W
20612.AA00 bloc 600 end, incl. driver 100W
20622.AA00 bloc 900 end, incl. driver 100W

- custom material on request
- oak can be dyed in reference color

AA	**Finish**
01	black
02	white
21	black alu anodised
22	natural alu anodised
23	brass alu anodised
25	bronze alu anodised
26	dark bronze anodised
30	brass brushed
31	brass polished
40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye
61	carrara bianco extra, honed

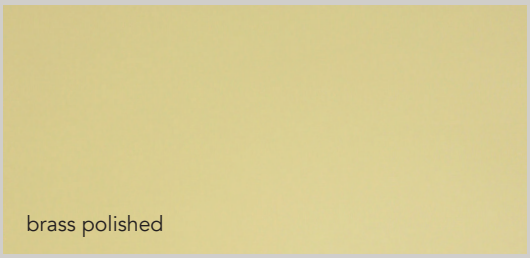

brass polished

brass brushed

°bloc.bevel

materials	aluminium coated or anodised / PC
weight	600gr / 1.32lb
voltage	48 Vdc
wattage	8,2 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020

IP20

Natural
anodised
aluminum

Brass
anodised
aluminum

Bronze
anodised
aluminum

Dark Bronze
anodised
aluminum

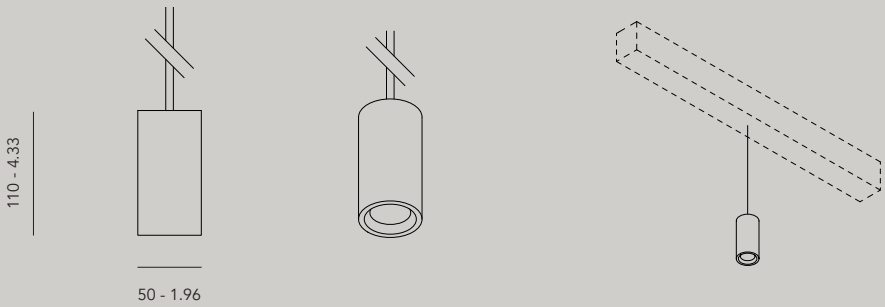

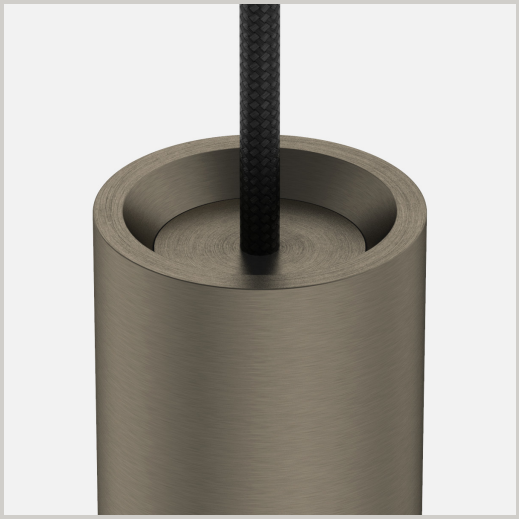

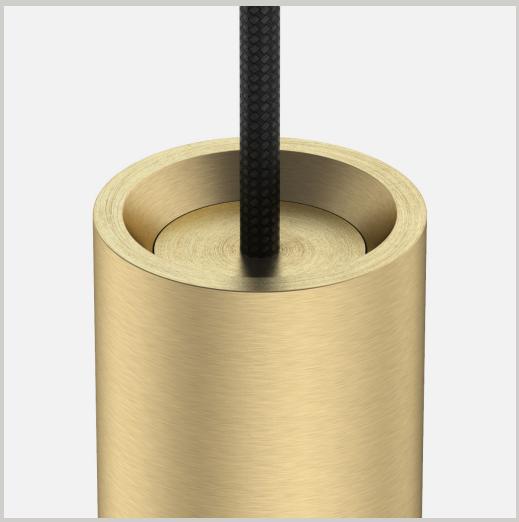

Order Code

20500.AA00.BBBB.CCC.DD bevel
20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompagned with a °bloc (see page 141)

max. 1 °bevel on bloc.300
max. 2 °bevel on bloc.600
max. 3 °bevel on bloc.900

AA	Finish
01	black
02	white
22	aluminum anodised brushed
23	brass anodised brushed
25	bronze anodised brushed
26	dark bronze anodised brushed

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.