


# °ledline

Continuous lines of light, without limits.

Each led module can be cut every 8 cm, this gives architects and lighting designers a lot of flexibility.

Led line has a very good efficiency. A high-tech diffusor was implemented to block as little light as possible and still give an opal look.

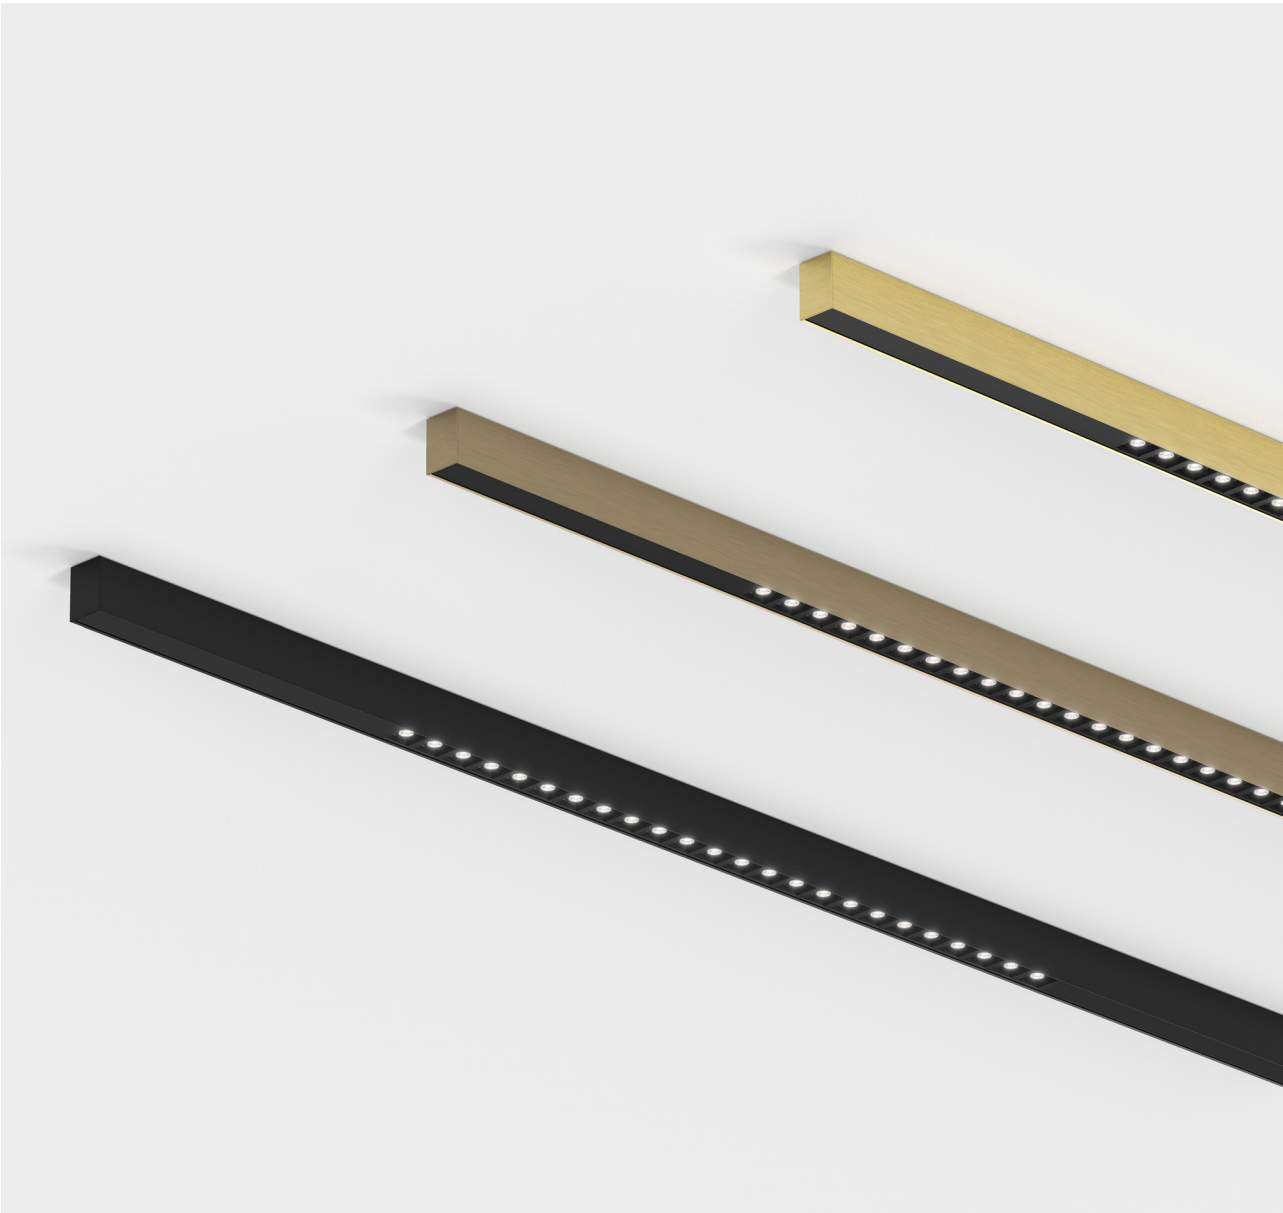

°led line 25 spot - surface



°led line 25 spot - pendant




°led line 25



# °ledline 25

material  
weight  
voltage  
cri  
wattage  
dali  
certifications  
classifications

aluminum  
0,8 kg/m - 0,52 lb/ft  
24Vdc  
>90  
13 or 28W / meter  
supported DT6 option  
**CE ENEC**  
**IP20** 

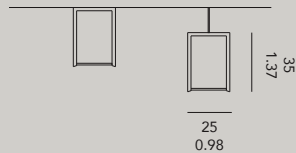


|                      |                                                                                                               |                                                                                                                                                                                             |
|----------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LL25. <b>L.B.T.K</b> |                                                                                                               | led modules cuttable every 8 cm                                                                                                                                                             |
| Length               | <b>2000</b><br><b>100 - ...</b>                                                                               | standard length<br>custom length (multiple of 8 cm)                                                                                                                                         |
| Body color           | <b>BK</b><br><b>WH</b><br><b>AL</b>                                                                           | black matt ral 9011<br>white matt ral 9016<br>aluminum color ral 9006 (on request only)                                                                                                     |
| Type                 | <b>SM</b><br><b>PD</b>                                                                                        | surface mount<br>pendant                                                                                                                                                                    |
| <b>K</b>             | <b>WW.13</b><br><b>WW2.13</b><br><b>NW2.13</b><br><b>WW.28</b><br><b>WW2.28</b><br><b>NW2.28</b><br><b>TW</b> | 2700K   13W   960 lm/m<br>3000K   13W   1020 lm/m<br>4000K   13W   1020 lm/m<br>2700K   28W   1650 lm/m<br>3000K   28W   1780 lm/m<br>4000K   28W   1850 lm/m<br>tunable white - on request |
| Accessories          | <b>LL25.EC.BK</b><br><b>LL25.EC.WH</b><br><b>LL25.EC.AL</b>                                                   | led line 25 End Cap Black<br>led line 25 End Cap White<br>led line 25 End Cap Aluminum                                                                                                      |
| Driver               | 24Vdc power supply (remote)                                                                                   |                                                                                                                                                                                             |

# °ledline 35


285

material  
weight  
voltage  
cri  
wattage  
dali  
certifications  
classifications

aluminum  
0,8 kg/m - 0,52 lb/ft  
24Vdc  
>90  
13 or 28W / meter  
supported DT6 option  
**CE ENEC**  
**IP20** 

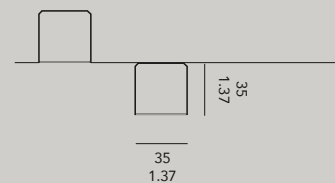

|                      |                                                                                                               |                                                                                                                                                                                             |
|----------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LL35. <b>L.B.T.K</b> |                                                                                                               | led modules cuttable every 8 cm                                                                                                                                                             |
| Length               | <b>2000</b><br><b>100 - ...</b>                                                                               | standard length<br>custom length                                                                                                                                                            |
| Body color           | <b>BK</b><br><b>WH</b><br><b>AL</b>                                                                           | black matt ral 9011<br>white matt ral 9016<br>aluminum color ral 9006 (on request only)                                                                                                     |
| Type                 | <b>BI</b><br><b>SM</b>                                                                                        | trimless<br>surface mount                                                                                                                                                                   |
| <b>K</b>             | <b>WW.13</b><br><b>WW2.13</b><br><b>NW2.13</b><br><b>WW.28</b><br><b>WW2.28</b><br><b>NW2.28</b><br><b>TW</b> | 2700K   13W   960 lm/m<br>3000K   13W   1020 lm/m<br>4000K   13W   1020 lm/m<br>2700K   28W   1650 lm/m<br>3000K   28W   1780 lm/m<br>4000K   28W   1850 lm/m<br>tunable white - on request |
| Accessories          | <b>LL35.EC.BK</b><br><b>LL35.EC.WH</b><br><b>LL35.EC.AL</b><br><b>LL35.MC.ST</b><br><b>LL35.MC.90°</b>        | led line 35 End Cap Black<br>led line 35 End Cap White<br>led line 35 End Cap Aluminum<br>mechanical connector straight (2pcs required)<br>mechanical connector 90° (2pcs required)         |
| Driver               | 24Vdc power supply (remote)                                                                                   |                                                                                                                                                                                             |

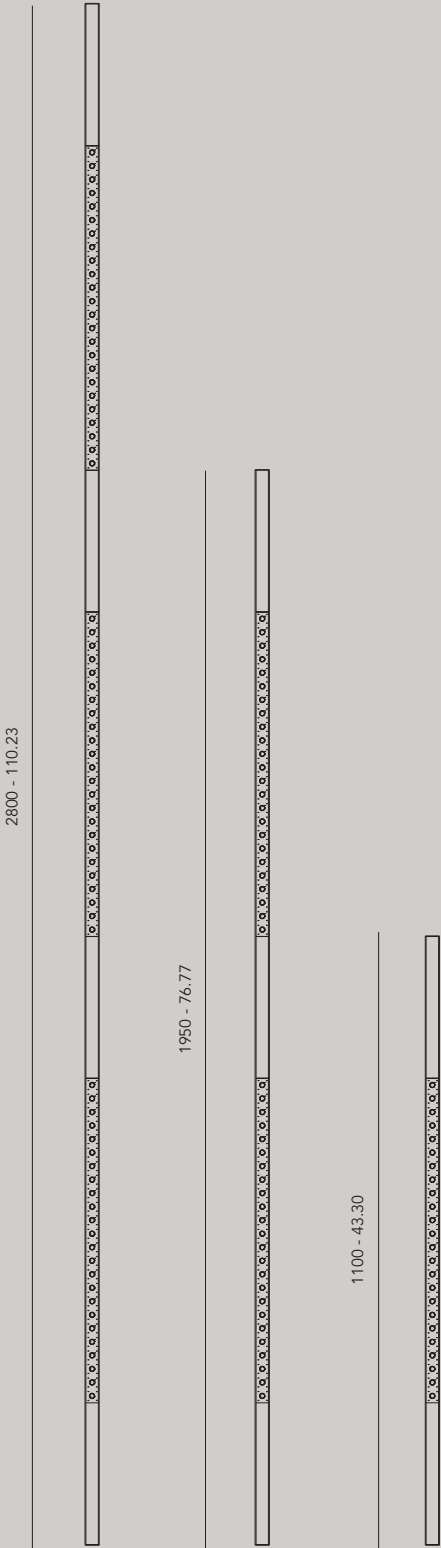

# °ledline 25 spot

|          |                       |
|----------|-----------------------|
| material | aluminum              |
| weight   | 0,8 kg/m - 0,52 lb/ft |
| voltage  | 48Vdc or 110-240Vac   |
| cri      | >95                   |
| wattage  | 26W/spot              |



IP20  CE ENEC

- 03601.AA00.BBBB.CCC.DD LL25 spot, 1100 mm, 1 spot
- 03602.AA00.BBBB.CCC.DD LL25 spot, 1950 mm, 2 spots
- 03603.AA00.BBBB.CCC.DD LL25 spot, 2800 mm, 3 spots

| AA | Finish                  |
|----|-------------------------|
| 01 | black                   |
| 02 | white                   |
| 22 | aluminum brushed        |
| 23 | brass alu brushed       |
| 25 | bronze alu brushed      |
| 26 | dark bronze alu brushed |

| BBBB | Light          |
|------|----------------|
| 9027 | cri >90, 2700K |
| 9030 | cri >90, 3000K |

| CCC | Optic                          | candela | lumen/spot * |
|-----|--------------------------------|---------|--------------|
| 205 | 20° <b>black glossy</b> louvre | 8700    | 1700         |
| 355 | 35° black glossy louvre        | 4080    | 1760         |
| 605 | 60° black glossy louvre        | 1580    | 1500         |
| 206 | 20° <b>black matt</b> louvre   | 8700    | 1700         |
| 356 | 35° black matt louvre          | 4080    | 1760         |
| 606 | 60° black matt louvre          | 1580    | 1500         |
| 207 | 20° <b>white matt</b> louvre   | 8700    | 1700         |
| 357 | 35° white matt louvre          | 4080    | 1760         |
| 607 | 60° white matt louvre          | 1580    | 1500         |

| DD | Dimming |
|----|---------|
| DA | dali    |
| CA | casambi |

\* Values for 3000K. Color temperature influences the lumen output.  
Download complete photometric data on our website