

°cd

°cd is a spot, especially developed for cast concrete ceilings.

This collection of spotlights is almost invisibly integrated into the ceiling and can also be combined with a ventilation nozzle.


It offers a solution for the proliferation of surface-mounted devices for ceiling techniques; usually in various sizes and shapes, not compatible with each other.

The spots can easily be mounted in drilled or poured holes in the ceiling. An extra advantage is that the character of a concrete ceiling is additionally exposed.


Design by rubens-frederix architects & etre moderne





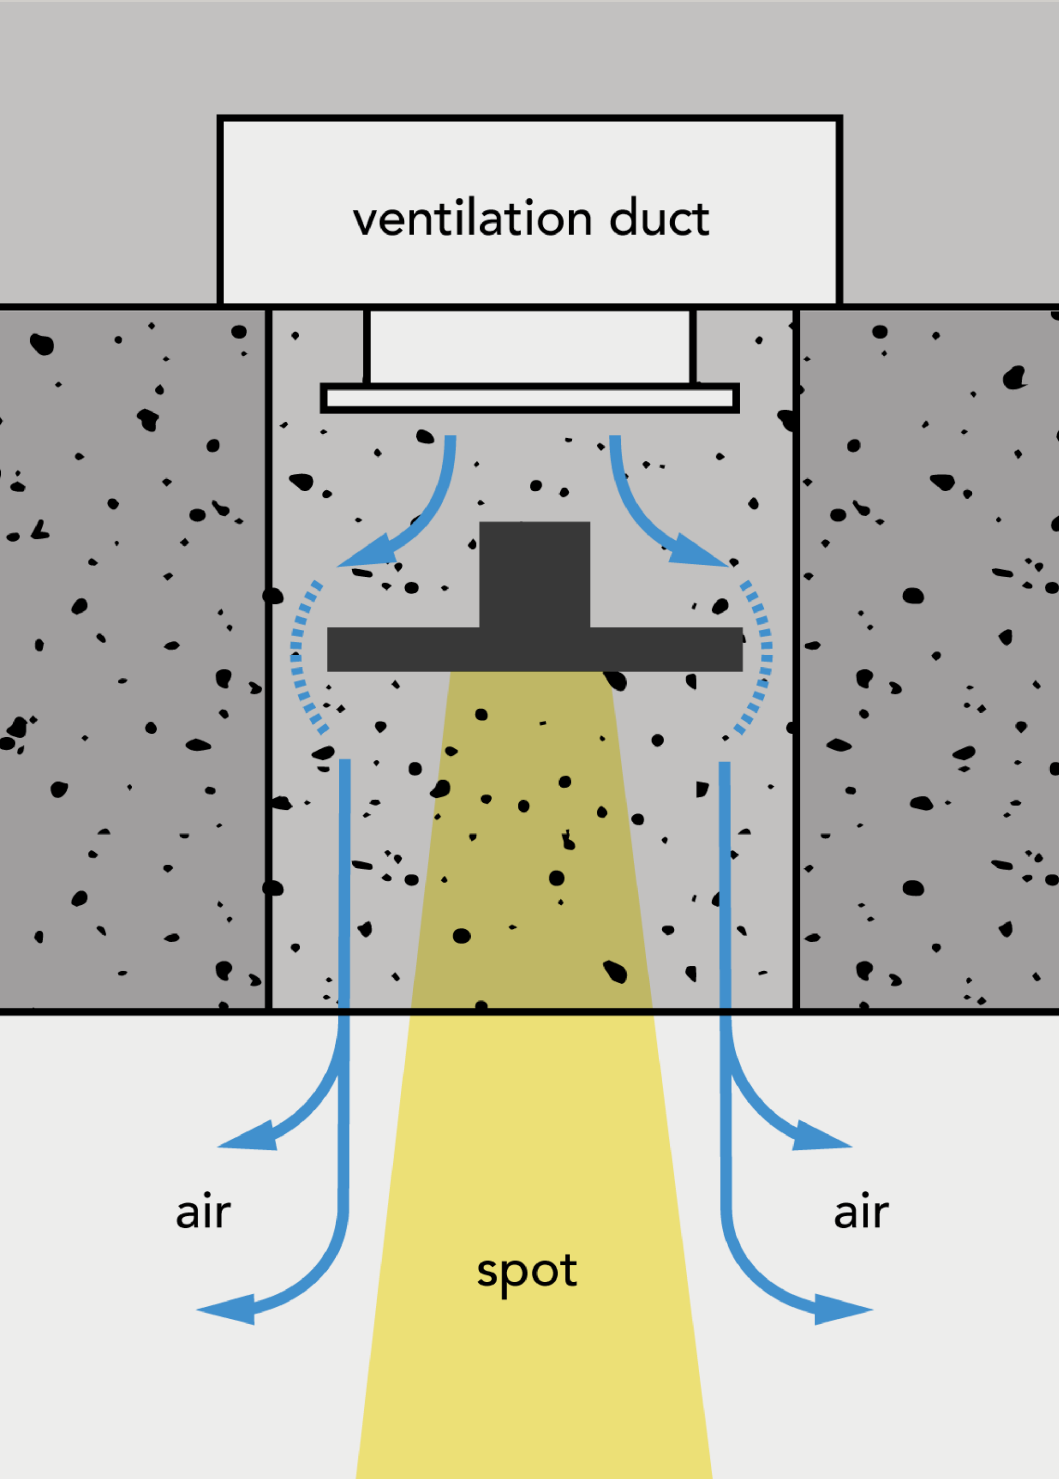

Scheme ventilation

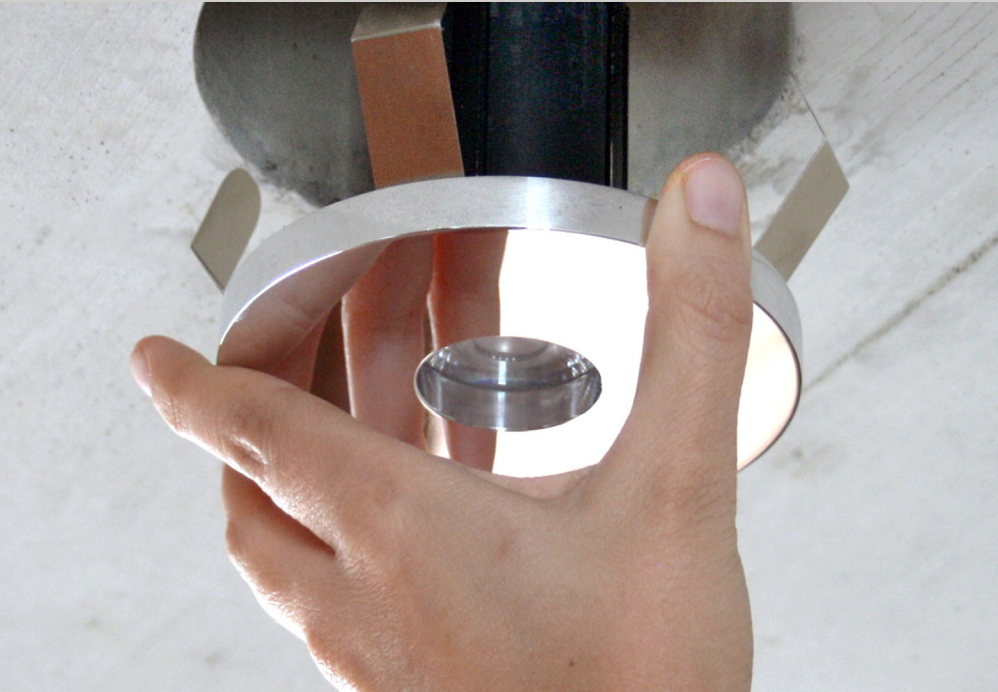

Easy installation



Smaller disc (105 mm) to use with ventilation system / mold has diameter of 135 mm


°cd

material	aluminum, oak
weight	0,8 - 1,6 kg / 0,52 - 1,04 lb
voltage	240 Vac
cri	>90
wattage	9W
lumen	700 lm
dimming	phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20   



Rubenshuis, Hasselt - architect Rubens-Frederix architects - photograph by etre moderne

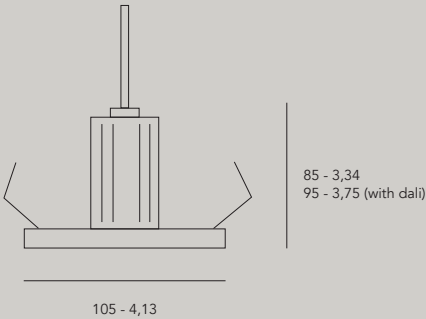

Order Code

04200.AA00.BBBB.CCC.DD diameter 105 mm
(to use with ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
21	black alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
41	oak natural
42	oak classic brown
43	oak black


BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

CCC	Optic	Output*
240	38°	670lm - 1550cd
360	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali

Accessories

04210	waxed mold PU for concrete ceiling diam 135 mm incl. screw.
04213	universal control valve for 125 system

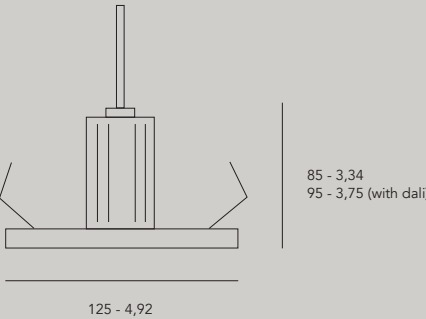

Order Code

04201.AA00.BBBB.CCC.DD diameter 125 mm
(whitout ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
21	black alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

CCC	Optic	Output*
240	38°	670lm - 1550cd
360	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali

Accessories

04210	waxed mold PU for concrete ceiling diam 135 mm incl. screw.
-------	--

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.