

# °bloc line <sup>new</sup>

Bloc is now available as full length profile.  
Choose your down- and uplights.



# Wall




300, 600 mm  
or custom



# °bloc.mono


materials aluminum coated / PC  
 weight from 0,5-5kg  
 voltage 230 Vac (110V on request)  
 wattage 8,2W - 16,4W (high output)  
 power supply integrated in fixture  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

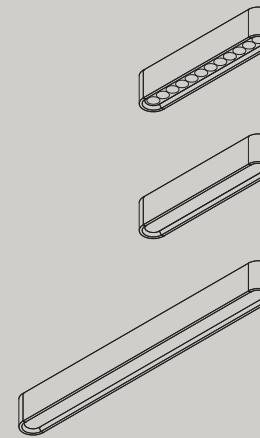

**Order Code**

- 20700.AA00.BBBB.CCC.DD bloc spot mono 300
- 20701.AA00.BBBB.CCC.DD bloc spot mono 300 high output
- 20702.AA00.BBBB.CCC.DD bloc stripe mono 300
- 20703.AA00.BBBB.CCC.DD bloc stripe mono 300 high output
- 20710.AA00.BBBB.CCC.DD bloc stripe mono 600
- 20711.AA00.BBBB.CCC.DD bloc stripe mono 600 high output

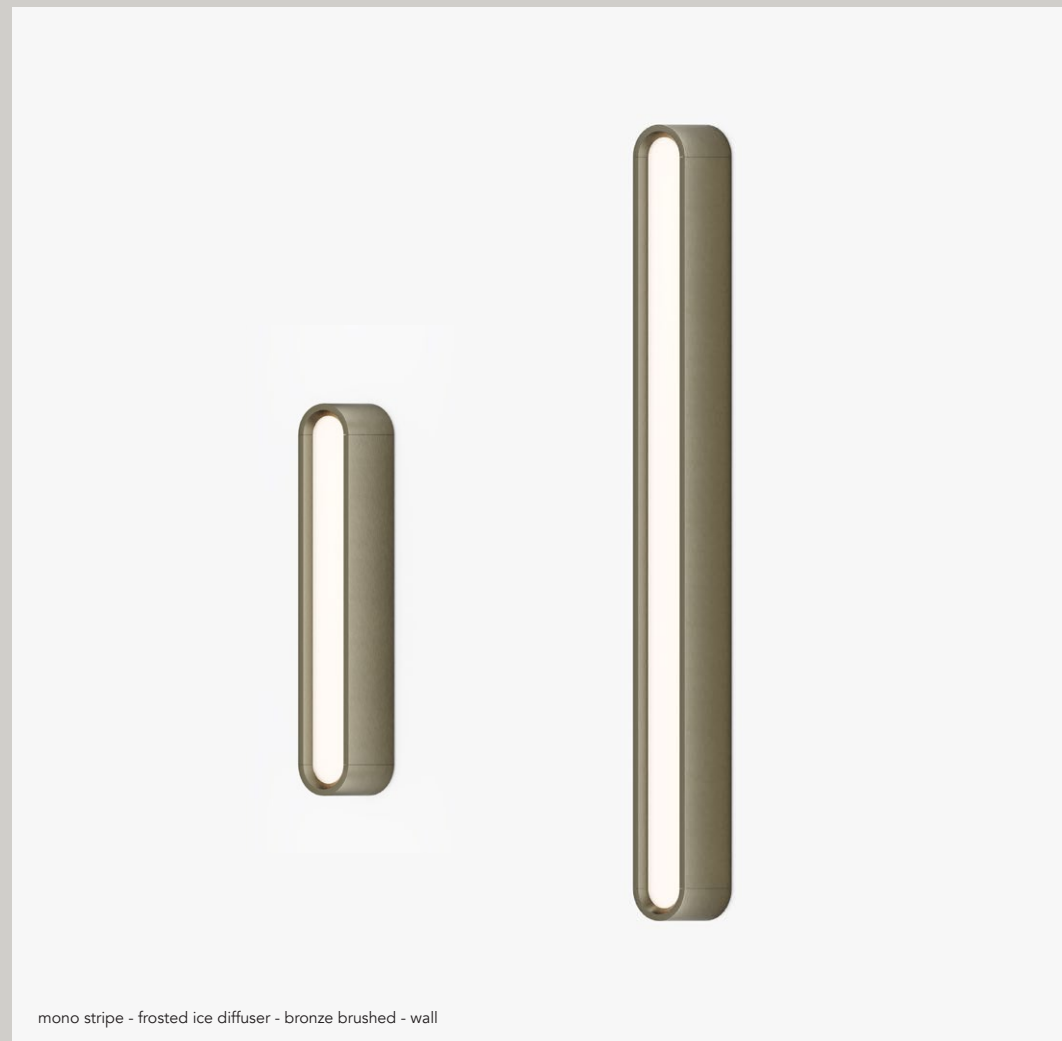

mono stripe - frosted ice diffuser - bronze brushed - wall



aluminum brushed + round reflector



bronze alu brushed + opal diffuser

- AA Finish**
- 01 black
  - 02 white
  - 21 black alu brushed
  - 22 natural alu brushed
  - 23 brass alu brushed
  - 25 bronze alu brushed
  - 26 dark bronze alu brushed
  - 27 gun metal alu brushed
  - 32 copper alu brushed
  - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
  - 9530 cri >95, 3000K
  - 9540 cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd

- DD Dimming**
- ND no dimming
  - DA dali (0/1-10V, switchDIM, Casambi through interface)
  - CA casambi control

\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.  
 \*\* For stripe 300

# °bloc.line

materials aluminum / PC  
 weight 3 kg/lm  
 voltage 230 Vac (110V on request)  
 wattage 8,2 W per spot or 28 W/m with diffuser  
 power supply integrated in fixture  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa

IP20   



## Order Code

**20803.AA00.BBBB.CCC.DD.EE** bloc line 1550 mm, 3 spots

**20830.AA00.BBBB.CCC.DD.EE** bloc line 1550 mm, diffuser

**20804.AA00.BBBB.CCC.DD.EE** bloc line 2150 mm, 4 spots

**20840.AA00.BBBB.CCC.DD.EE** bloc line 2150 mm, diffuser

**20805.AA00.BBBB.CCC.DD.EE** bloc line 2650 mm, 5 spots

**20850.AA00.BBBB.CCC.DD.EE** bloc line 2650 mm, diffuser

## Custom configuration on simple request

### AA Finish

- 01 black
- 02 white
- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

### 00 Suspension

- 00 surface
- 01 pendant

### BBBB Light

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K
- 9540 cri >95, 4000K - on request

### CCC Down Light

- |     |                      |                      |
|-----|----------------------|----------------------|
| 001 | frosted ice diffuser | 2913lm/m             |
| 002 | microprism diffuser  | 2913lm/m             |
| 200 | 20 deg spots         | 1090lm - 5650cd/spot |
| 300 | 30 deg spots         | 1055lm - 3310cd/spot |
| 600 | 60 deg spots         | 1090lm - 1200cd/spot |


### DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)

### EE Up Light (28 W/m)


- 001 none
- 002 uplight (same color light as downlight)

Values for 3000K. Color temperature influences the lumen output.  
 Download complete photometric data on our website.

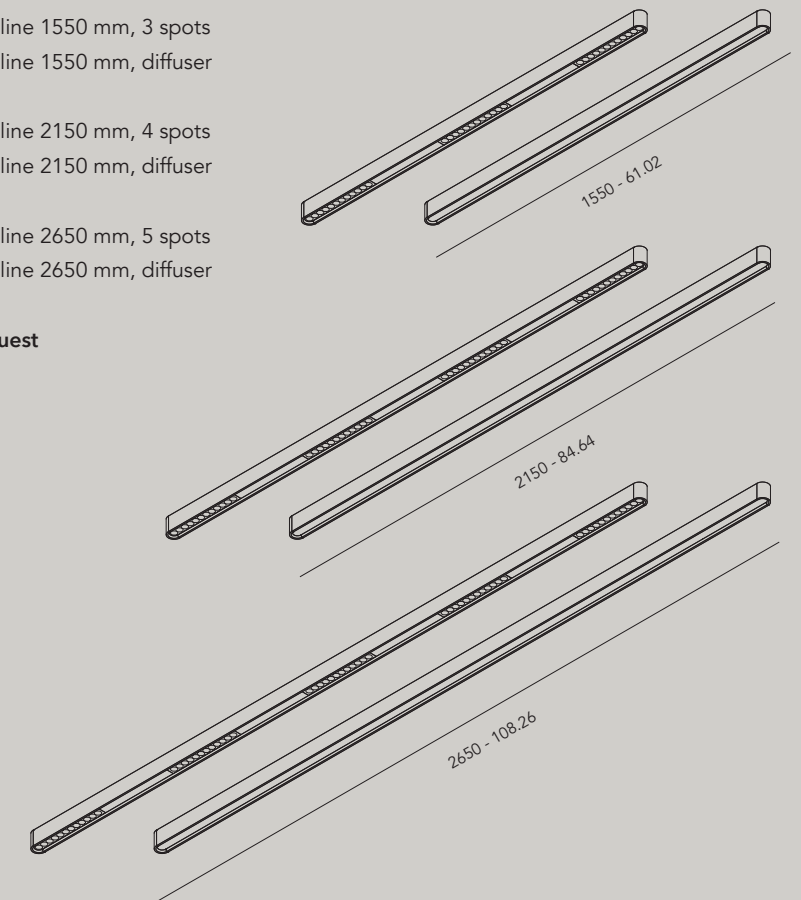

# ° suspension


## Steel cable suspension surface (adjustment height at fixture)

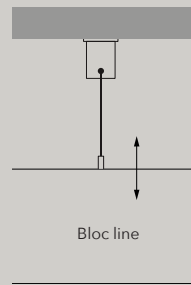

- 20256** Cylindrical nickel ceiling attachment with 1 mm steel cable - 2 m
- 20257** Cylindrical nickel ceiling attachment with 1 mm steel cable - 6 m



## Round rosas with steel cable suspension (adjustment height at fixture)

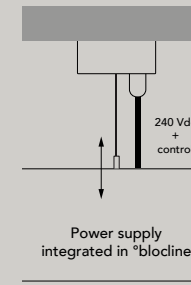

- 20260.01** Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 2 m
- 20260.02** White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 2 m
- 20261.01** Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 6 m
- 20261.02** White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 6 m

- 20262.01** Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 2 m
- 20262.02** White round rosas 82 mm with 1 mm steel steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 2 m
- 20263.01** Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 6 m
- 20263.02** White round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm<sup>2</sup> cable - 6 m


ø 62 x 32



ø 82 x 32



## Steel cable suspension recessed for plasterboard, wood, or similar (adjustment height at ceiling & fixture)

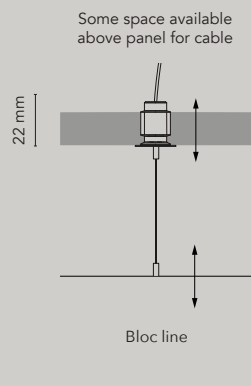

- 20258** Steel zinc adjuster recessed 12 mm with 1 mm steel cable - 2 m
- 20259** Steel zinc adjuster recessed 12 mm with 1 mm steel cable - 6 m

