

°bloc line ^{new}

Bloc is now available as full length profile.
Choose your down- and uplights.



Wall




300, 600 mm
or custom



°bloc.mono


materials aluminum coated / PC
 weight from 0,5-5kg
 voltage 230 Vac (110V on request)
 wattage 8,2W - 16,4W (high output)
 power supply integrated in fixture
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

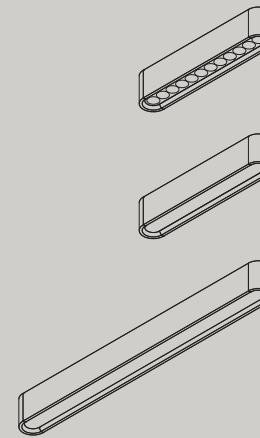

Order Code

- 20700.AA00.BBBB.CCC.DD bloc spot mono 300
- 20701.AA00.BBBB.CCC.DD bloc spot mono 300 high output
- 20702.AA00.BBBB.CCC.DD bloc stripe mono 300
- 20703.AA00.BBBB.CCC.DD bloc stripe mono 300 high output
- 20710.AA00.BBBB.CCC.DD bloc stripe mono 600
- 20711.AA00.BBBB.CCC.DD bloc stripe mono 600 high output

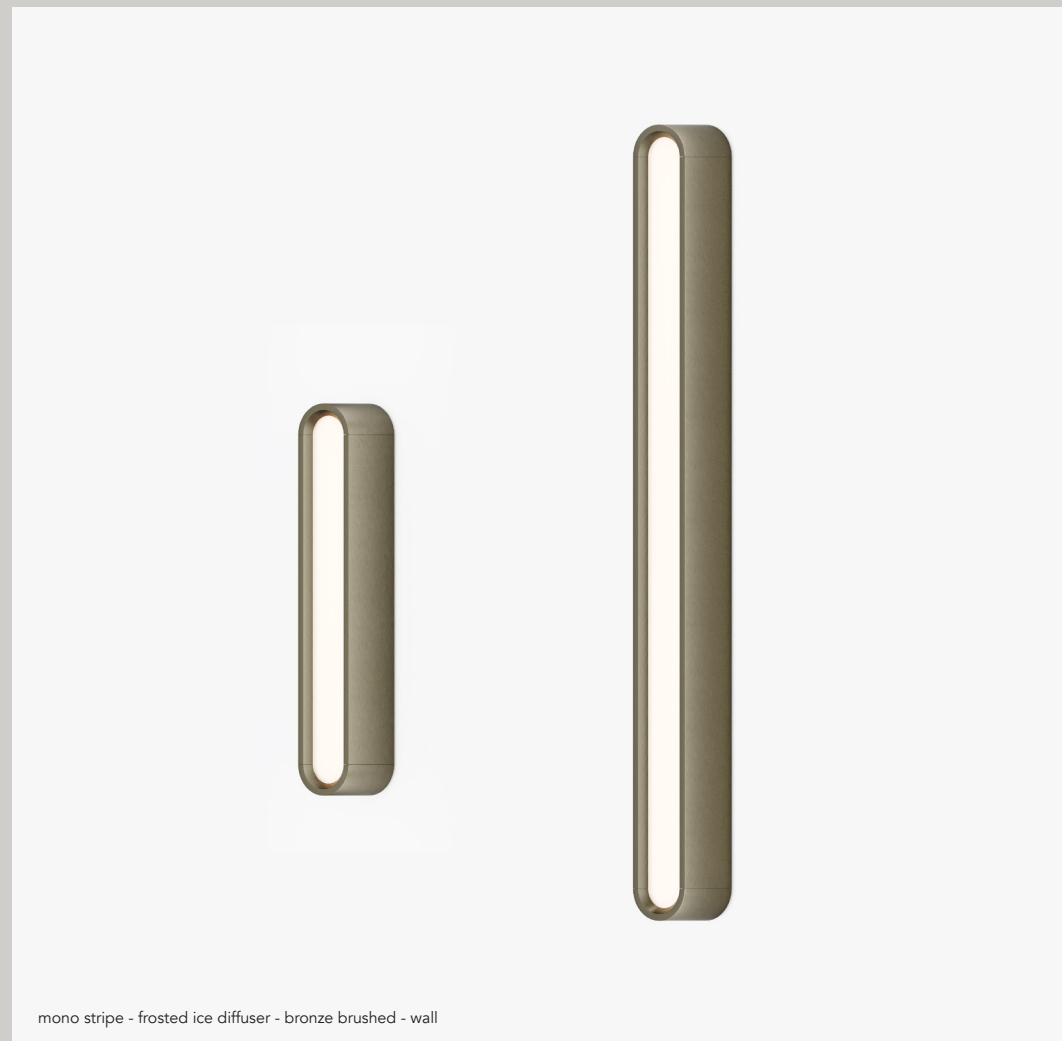

mono stripe - frosted ice diffuser - bronze brushed - wall



aluminum brushed + round reflector



bronze alu brushed + opal diffuser

- AA Finish**
- 01 black
 - 02 white
 - 21 black alu brushed
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd

- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)
 - CA casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.
 ** For stripe 300

°bloc.line

materials aluminum / PC
 weight 3 kg/lm
 voltage 230 Vac (110V on request)
 wattage 8,2 W per spot or 28 W/m with diffuser
 power supply integrated in fixture
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa

IP20   



Order Code

20803.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, 3 spots

20830.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, diffuser

20804.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, 4 spots

20840.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, diffuser

20805.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, 5 spots

20850.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, diffuser

Custom configuration on simple request

- AA Finish**
- 01 black
 - 02 white
 - 21 black alu brushed
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- 00 Suspension**
- 00 surface
 - 01 pendant


- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

- CCC Down Light**
- | | | |
|-----|----------------------|----------------------|
| 001 | frosted ice diffuser | 2913lm/m |
| 002 | microprism diffuser | 2913lm/m |
| 200 | 20 deg spots | 1090lm - 5650cd/spot |
| 300 | 30 deg spots | 1055lm - 3310cd/spot |
| 600 | 60 deg spots | 1090lm - 1200cd/spot |

- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)


- EE Up Light (28 W/m)**
- 001 none
 - 002 upright (same color light as downlight)

Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.

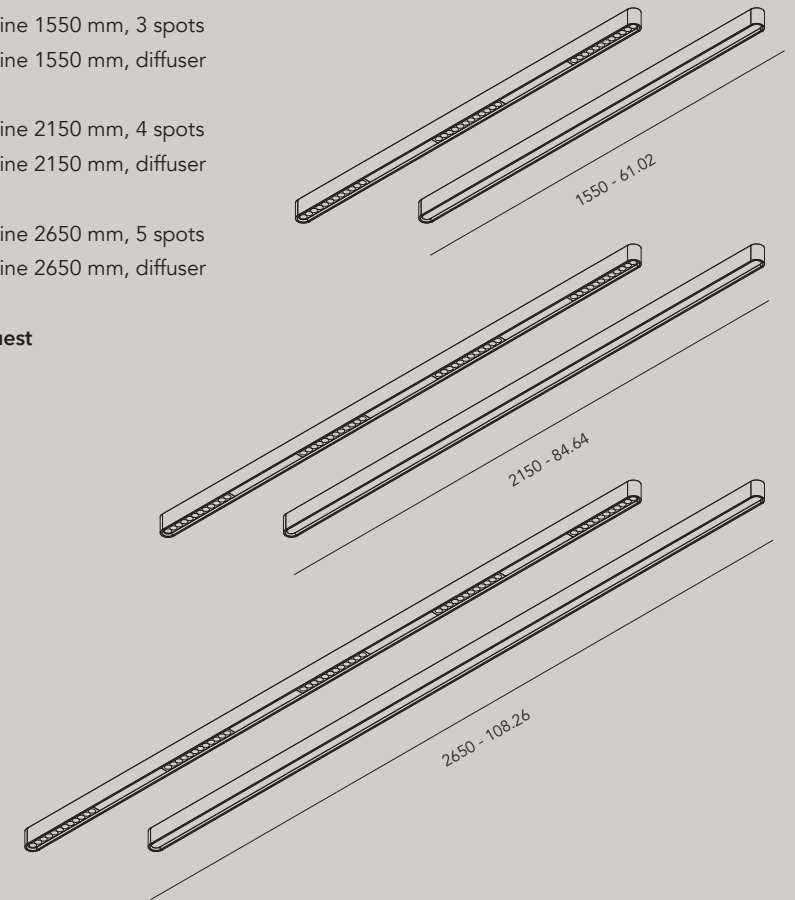

° suspension


Steel cable suspension surface (adjustment height at fixture)

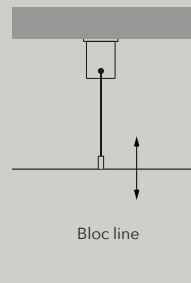

- 20256 Cylindrical nickle ceiling attachment with 1 mm steel cable - 2 m
- 20257 Cylindrical nickle ceiling attachment with 1 mm steel cable - 6 m



Round rosas with steel cable suspension (adjustment height at fixture)

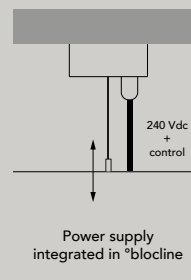


- 20260.01 Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m
- 20260.02 White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m
- 20261.01 Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m
- 20261.02 White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m
- 20262.01 Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m
- 20262.02 White round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m
- 20263.01 Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m
- 20263.02 White round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m

ø 62 x 32

ø 82 x 32



° ceiling rose

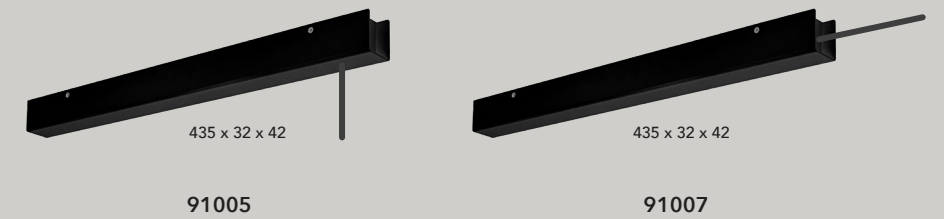

Order Code

PARTNUMBER.0100 black

PARTNUMBER.0200 white

Suitable power cable:

- Transparant powercable 5x75 mm²
- Black textile powercable 5x75 mm²

Suitable steel cable:

- Suspension steel cable 0,6 mm (plug)
- Suspension steel cable 1 mm (blocline)

Only the ceiling box, to be combined with a suitable powersupply.

91005.0100 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - black

91005.0200 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - white

91007.0100 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - black

91007.0200 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - white

°bloc

°bloc

125

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne



new

new







°bloc.stripe & °bloc white
Interior Casa Vero - light design Jeune Concept







°bloc

133



°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten



°bloc.spot (oak) & °bloc (carrara)




°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC



°bloc


set-up guide

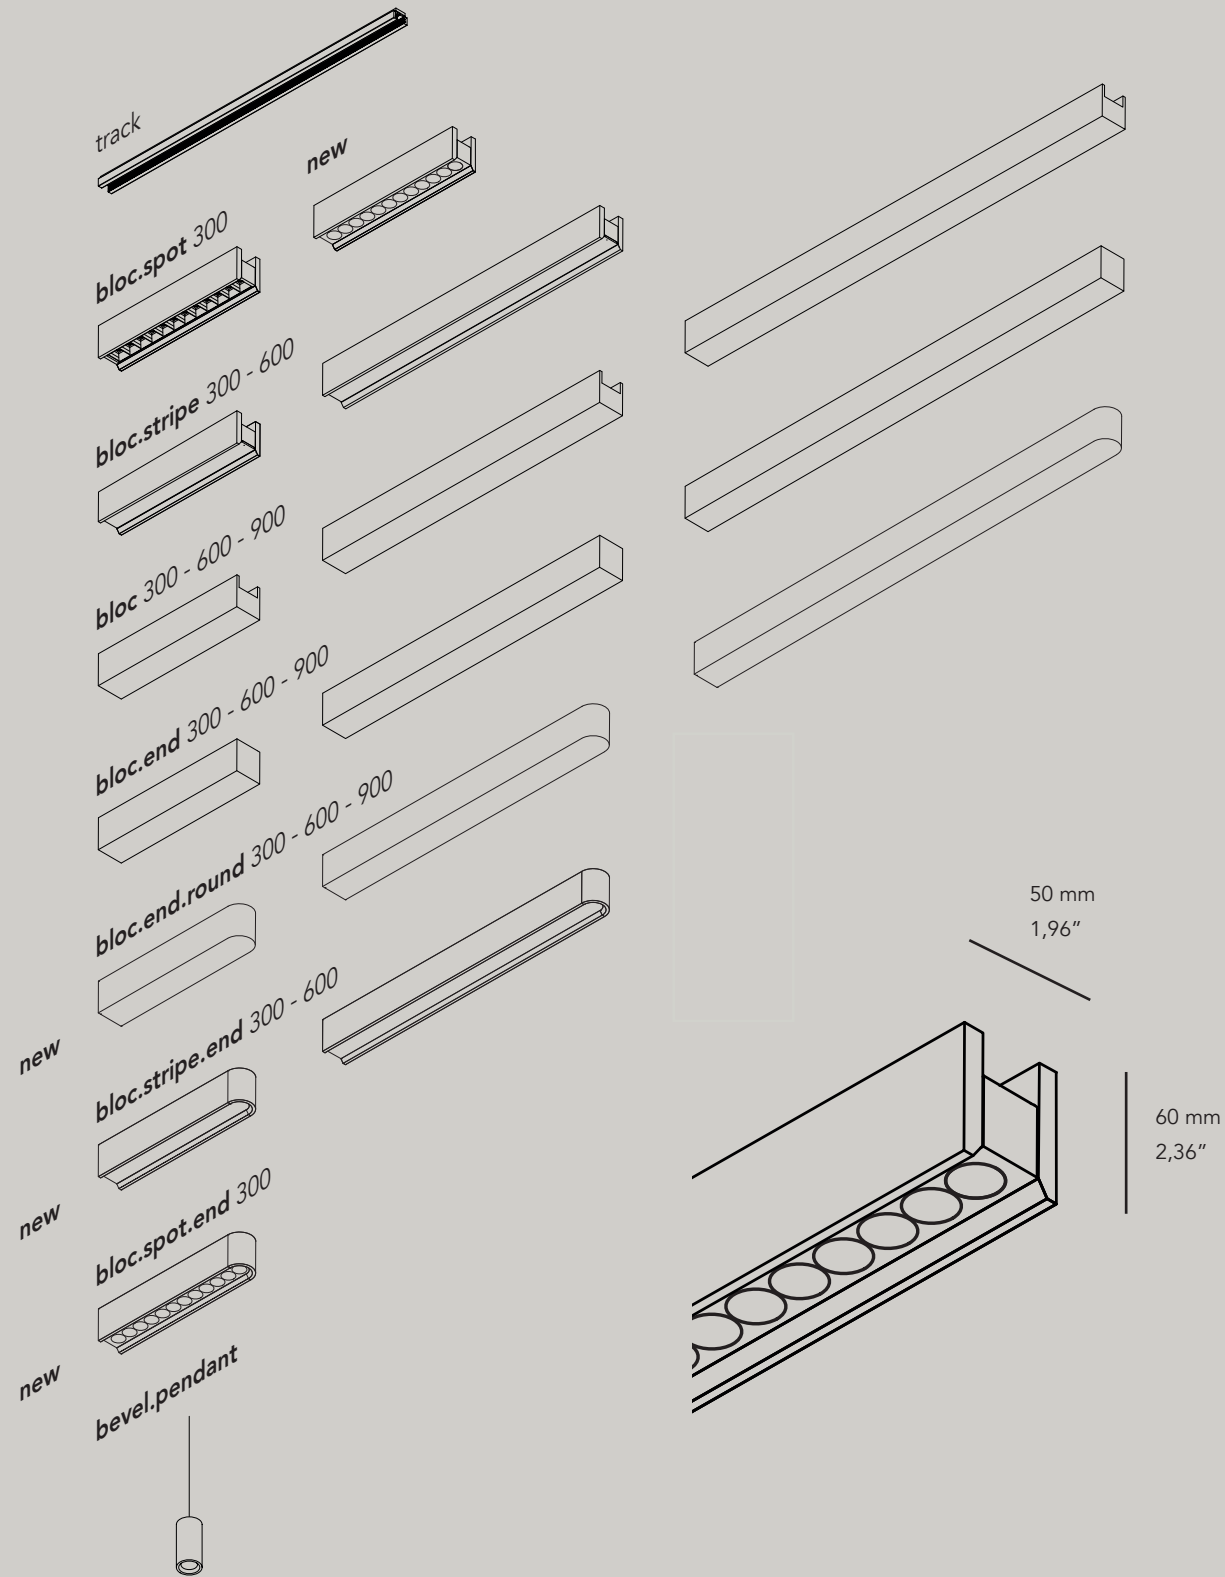

Order Code	BBBB	Length
20000.0100.BBBB bloc track black	0500	500 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

Accessories


- 20252.0000 bloc track pendant 2 m steel cable suspension (incl. elec. cable)
- 20253.0000 bloc track pendant 2 m steel cable suspension (1 per meter)
- 20254.0000 bloc track pendant 2 m bar suspension (incl. elec. cable)
- 20255.0000 bloc track pendant 2 m bar suspension (1 per meter)

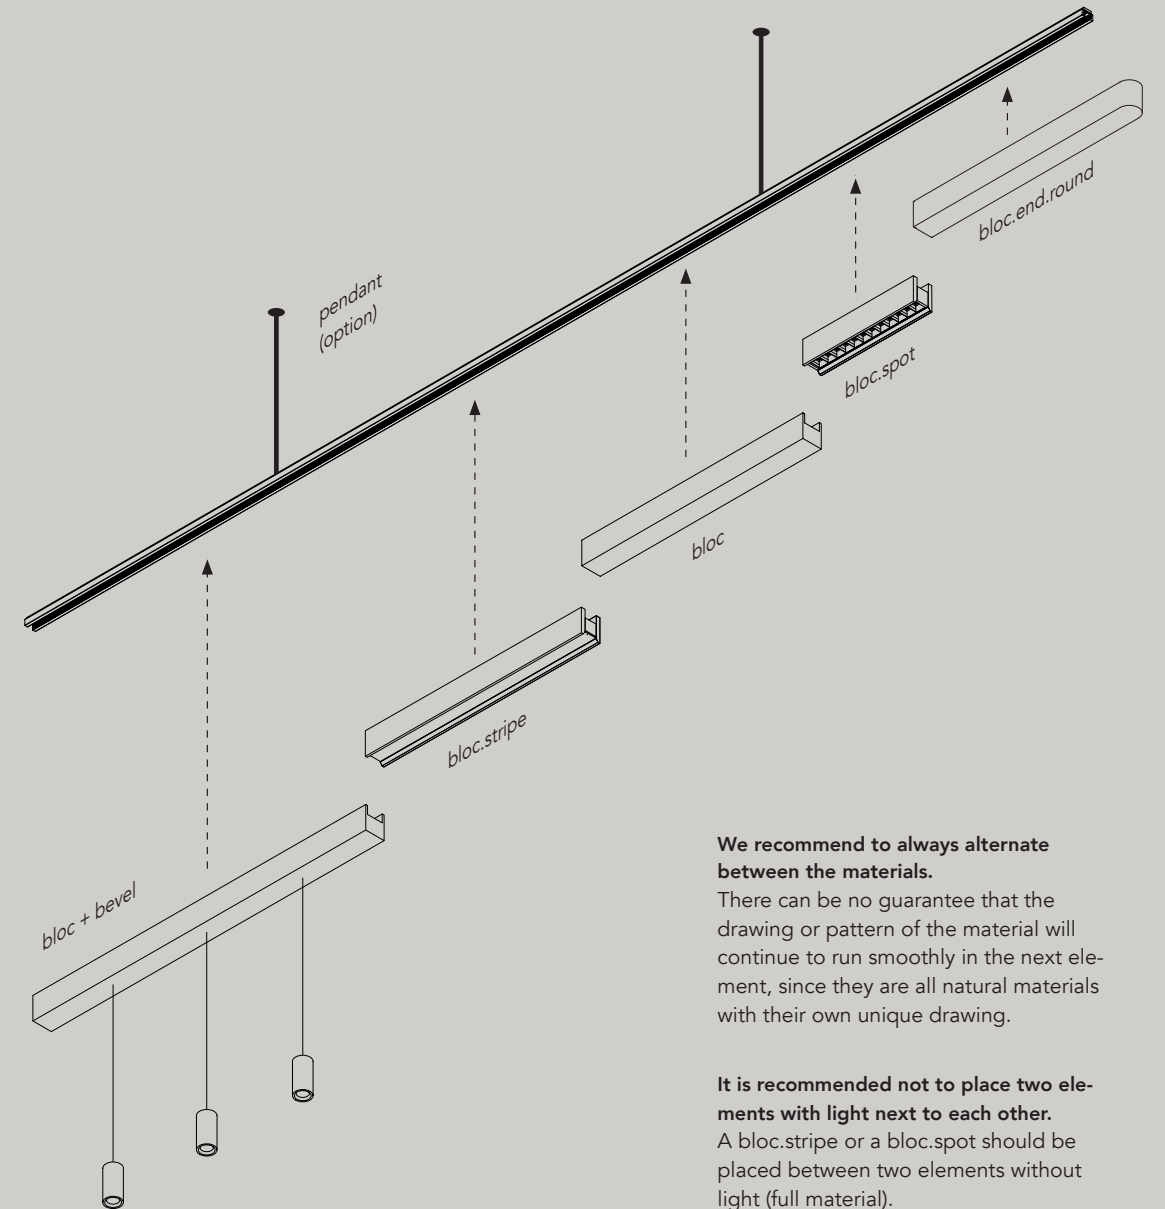

We recommend to always alternate between the materials.
 There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.
 A bloc.stripe or a bloc.spot should be placed between two elements without light (full material).




Powersupply can be integrated in bloc elements (without light)

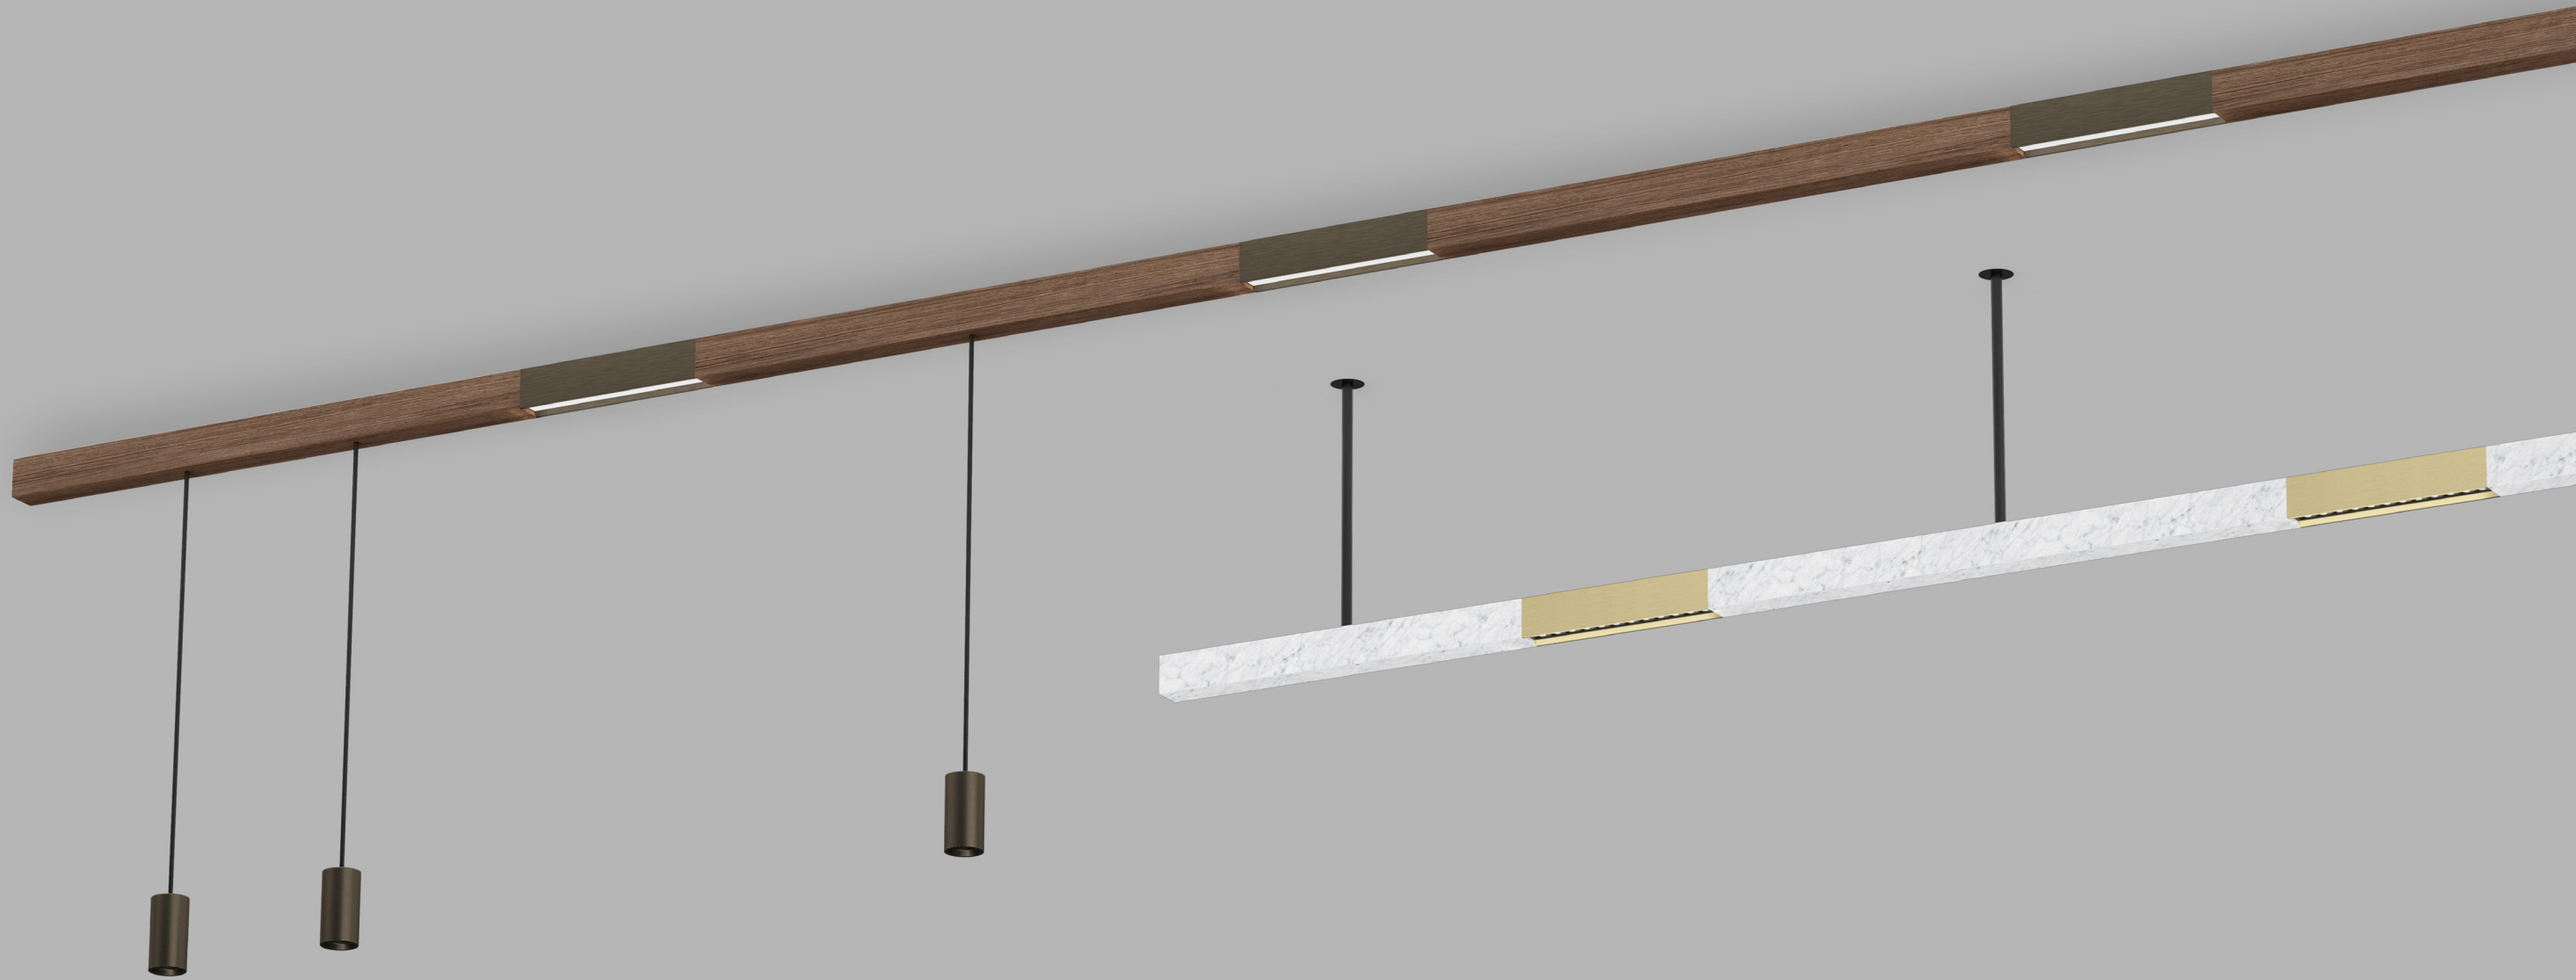

° bloc.spot

materials aluminum / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 ugr <10
 wattage 13W - 26W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20 



Order Code

20300.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector
20301.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector high output


20310.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector
20311.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector high output

20312.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector & round end
20313.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector & round end high output



bloc.spot - brass alu brushed - square reflector

bloc.spot - brass alu brushed - round reflector

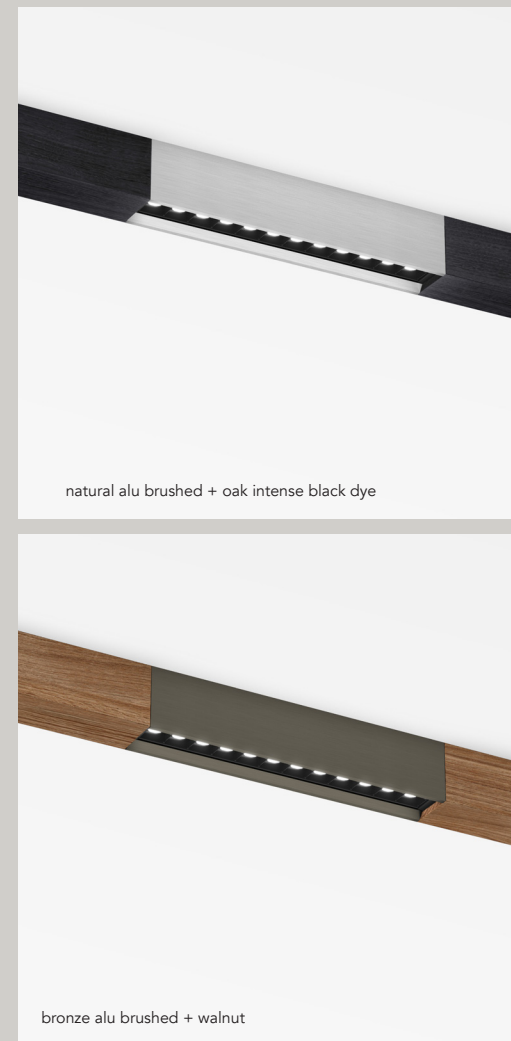

natural alu brushed + oak intense black dye

bronze alu brushed + walnut

AA	Finish
01	black
02	white
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
32	copper alu brushed
03	painting custom NCS color

BBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request


CCC	Optic	Output*	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc.stripe

materials aluminum / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 wattage 8,2W - 16,4W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

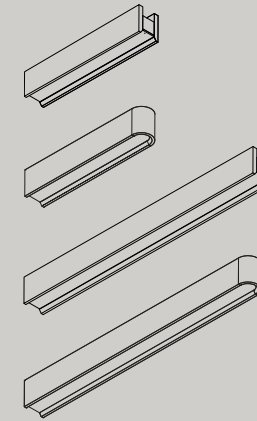

Order Code

- 20400.AA00.BBBB.CCC.DD bloc stripe 300
- 20401.AA00.BBBB.CCC.DD bloc stripe 300 high output*
- 20404.AA00.BBBB.CCC.DD bloc stripe 300 end
- 20405.AA00.BBBB.CCC.DD bloc stripe 300 end high output*
- 20410.AA00.BBBB.CCC.DD bloc stripe 600
- 20411.AA00.BBBB.CCC.DD bloc stripe 600 high output*
- 20414.AA00.BBBB.CCC.DD bloc stripe 600 end
- 20415.AA00.BBBB.CCC.DD bloc stripe 600 end high output*

*only available for alu finishes & black/white paint

IP20



°bloc stripe 300 - brass alu brushed + natural oak



°bloc stripe 600 - brass alu brushed + carrara bianco



brass alu brushed, round end + carrara bianco



bronze alu brushed + oak classic brown dye

AA	Finish
01	black
02	white
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light	Output	High output*
9527	cri >95, 2700K	880lm - 310cd	1610lm - 560cd
9530	cri >95, 3000K	780lm - 370cd	1430lm - 680cd
9540	cri >95, 4000K - on request		

CCC	Optic
001	frosted ice
002	microprism


DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bevel bloc

materials aluminum / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

IP20   

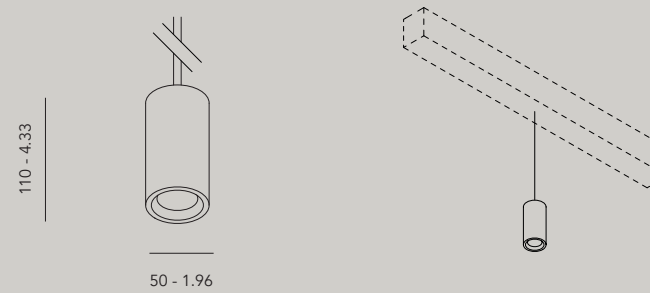

Natural
aluminum

Brass
aluminum

Bronze
aluminum

Dark Bronze
aluminum

Order Code

20500.AA00.BBBB.CCC.DD bevel
 20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 126)

max. 1 °bevel on bloc.300
 max. 2 °bevel on bloc.600
 max. 3 °bevel on bloc.900

AA	Finish
01	black
02	white
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.

°bloc


Order Code

- 20600.AA00 bloc 300
- 20610.AA00 bloc 600
- 20620.AA00 bloc 900
- 20601.AA00 bloc 300 end
- 20611.AA00 bloc 600 end
- 20621.AA00 bloc 900 end
- 20603.AA00 bloc 300 end round
- 20613.AA00 bloc 600 end round
- 20623.AA00 bloc 900 end round

bloc
300-600-900

bloc end
300-600-900

bloc end round
300-600-900

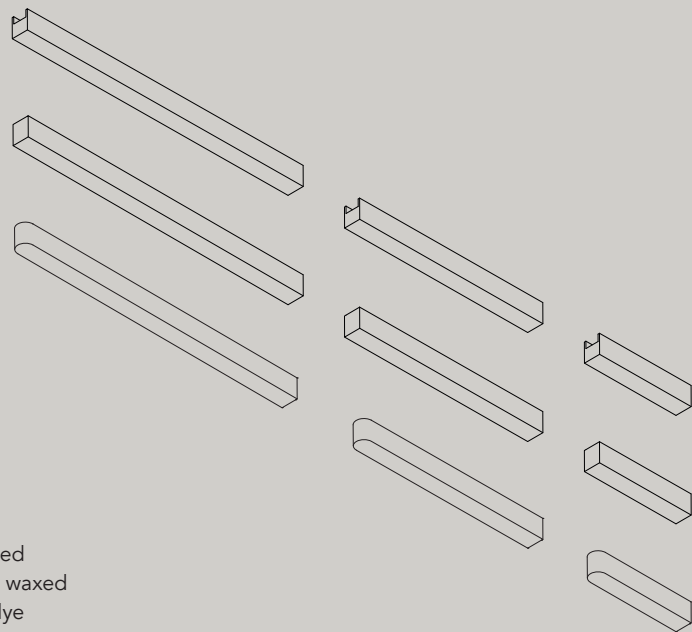

AA Finish


- 01 black
- 02 white
- 40 walnut, natural waxed
- 41 oak natural, natural waxed
- 42 oak classic brown dye
- 43 oak intense black dye
- 61 carrara bianco extra, honed

Custom material on request
Oak can be dyed in reference color

00 Driver

- 00 not included
- 01 power supply 100W included

°bloc colors

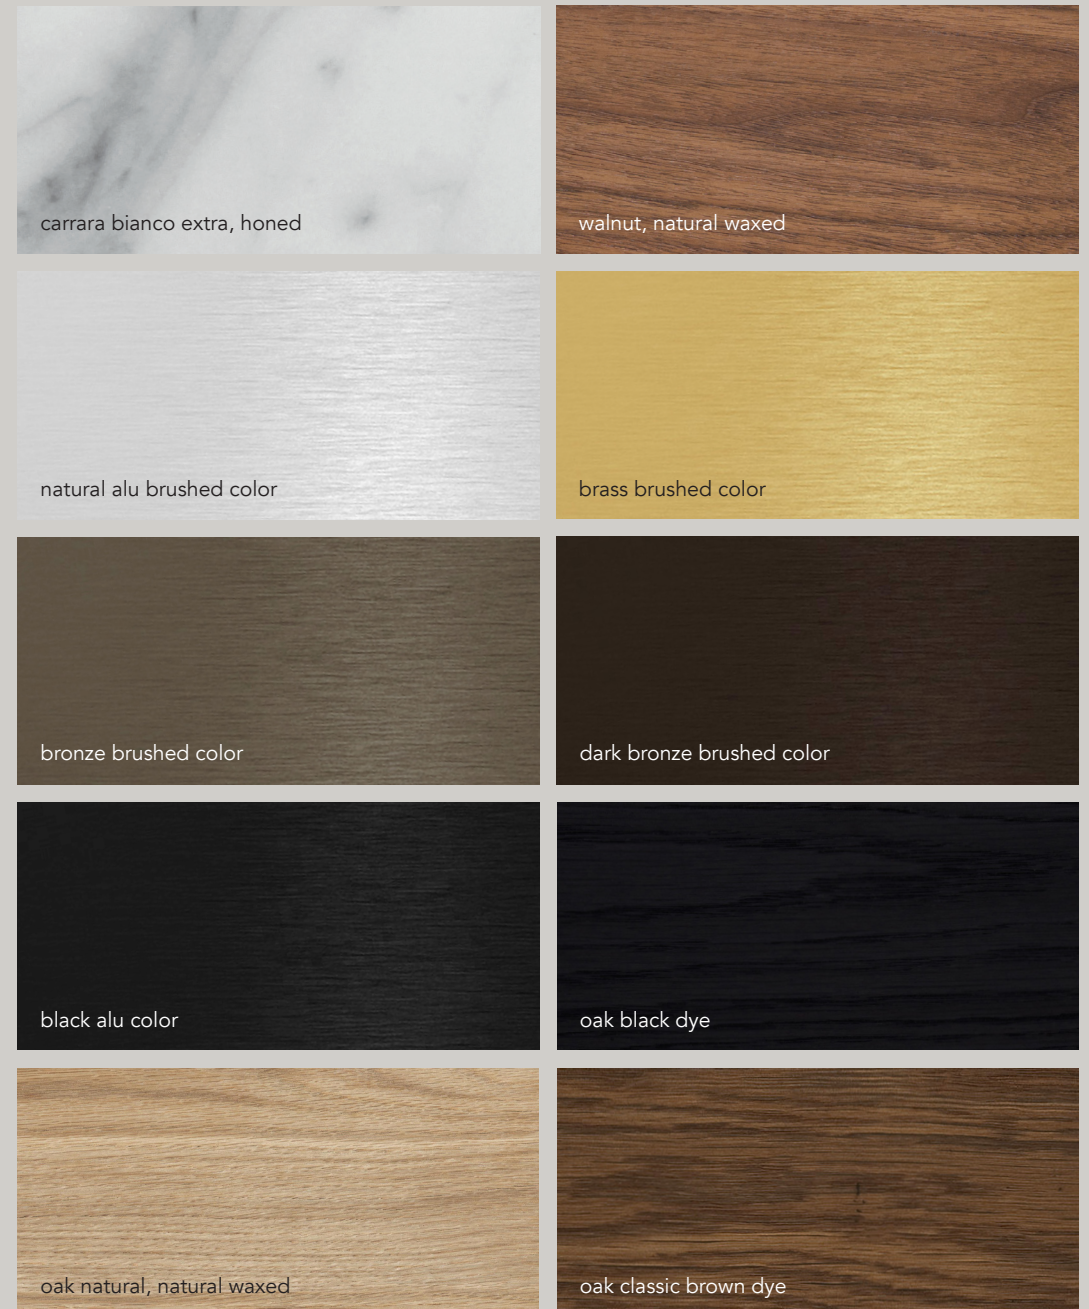

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.