



eden
design

COLLECTION 26

THE COLLECTIONS

12	°bubli ^{new}
30	°bloc micro ^{new}
48	°ledline 16 ^{new}
56	°plug
134	°micr'online
178	°bloc & blocline
216	°bevel
224	°online
310	°multip
322	°cd
332	°cd+
336	°led line
340	°sphere
358	°XXXL(amp)
372	°led on fire
378	°fool moon
392	°XL(amp)
406	°eclipse
412	°diabolo
418	°i-light

Eden Design since 2002



For Whom?

Eden Design provides a comprehensive range of lighting collections, ranging from **innovative architectural lighting** to **large light fixtures for spacious locations**, to meet the needs of interior architects, engineering offices, installers, light architects, lighting shops, and other related industries.

The lighting solutions that have won numerous awards are **available globally**.

What?

We have the ability to provide **fully customizable solutions based on our existing collections**. Our ultimate goal is to ensure that all parties involved are fully satisfied with the final product.

Striking the **ideal balance between functionality and aesthetics** presents us with a constant challenge.

Our distinctive designs are tailored specifically for you, and are both technically sound and substantiated, ensuring that each project is **one-of-a-kind** and leaves a lasting impression.

How?

Eden Design is your go-to lighting design company, whether you have a preconceived idea or need help creating the perfect lighting atmosphere for your project.

We **prioritize your needs and ideas**, and work with you to make adjustments to ensure that all expectations are met by the end of the project journey.

At Eden Design, we provide prompt responses to your inquiries and **take into account the technical aspects and installation details** of your project before providing a customized offer.

With a **personal touch and a dedicated contact person**, we offer smooth handling and support for any questions, ensuring that we provide high-quality service to all our clients.

We remain **available to our customers post-sales** and endeavor to provide prompt and efficient solutions to any queries.

Our creatives

Bart Lens

Through his architecture and design, Bart Lens hopes to have an impact on our living environment. Bart Lens transforms things which already exist. As a part of the creative process, he observes how people experience their environment and how they occupy space. He is drawn ever closer to the materials, with the traditional ways of working them becoming ever more important. With this emphasis, Bart Lens brings sensitivity and atmosphere to a substantial part of the overall living environment.

lensass.be

Eden Design

Being active in the installation market for more than 35 years, Eden Design has built up a long history. Gradually turning to building automation, a significant know-how has been gathered.

When entering the path of design, this know-how has played a large role.

Creating innovative products, integrating technology and design is the main thought behind the Eden Design lighting.



Frits Jeuris

You have thinkers and you have doers. The Belgian creative artist Frits Jeuris (1975) clearly belongs to both categories. It can by no means be said that there is no thinking in Jeuris' 'head'. On the contrary, he thinks while you talk to him.

He sees concepts flying by behind his eyes and with a few strokes on a blank sheet he draws simple sketches that immediately make clear what he has in mind. At that moment, the conceptual thinker with a critical eye not only has an idea, but also immediately knows how it can possibly be realized. His knowledge of technology and materials is often based on his experience in making, or rather creating.

Frits Jeuris looks, analyses, thinks and then makes a statement with a surprisingly pure design.

fritsjeuris.be

Etre Moderne

Designers Philippe Vermeersch and Caroline Gielen are specialized in lighting, furniture and object design. Their style is no-nonsense, straightforward & unpretentious. At first sight simple, but sophisticated in detail. Different materials and techniques are like a red thread through the designs. They produce local (Belgium), wanting to preserve the work of craftsmen and to make their talent last.

etremoderne.be



Rubens-Frederix Architects

Strives for tactile and experimental design. At different scales, various issues such as spatial experience, materialization, relationships, etc. are questioned in interaction with the client in order to convert functional expectations into inspiring answers.

rubens-frederix.be

Sustainability

Eden Design is committed to sustainability and has identified specific focus points to work towards that goal.


We are actively pursuing these objectives.

Circular aluminum

Our collections use durable profiles of premium **circular aluminum** that do not deplete fossil fuels and raw materials and are of premium quality.

The production of this aluminum emits 90% less CO2 than conventional aluminum with fossil fuels. It has also a 10x lower carbon footprint.

That sustainability goes hand in hand with premium quality. With a lower impact on the environment, you enjoy the unprecedented benefits of premium circular aluminum.

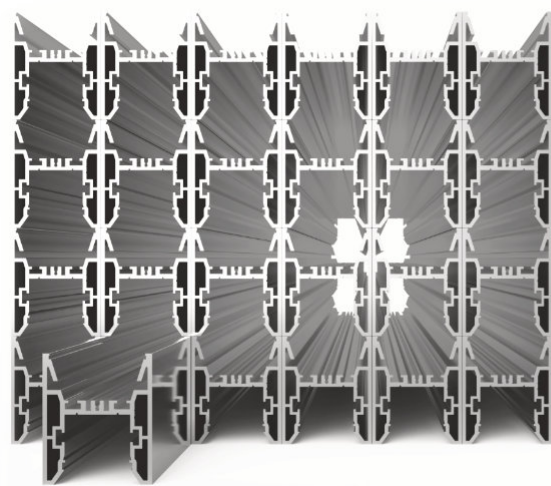

Quality for life

We **focus on the quality** and the choice of raw materials, the finish of the products, LEDs, optics, etc.

Our LEDs are developed in-house, with a **high value of lumen/watt & high CRI** as a priority.

This has a positive influence on the lifespan of our fixtures.

Disassemble for repair or recycling

The **products are easily disassembled** down to the single material level, meaning it can be taken apart into components made from raw materials.

Breaking down products into their individual parts helps reduce waste, conserve resources, and support circular economy principles.

Disassembling a product allows access to individual components, making it also easier to repair or to upgrade specific parts instead of replacing the entire product.

Origin

Eden prefers **short production chains** for better quality control.

90% of the hardware is sourced from local **Belgian workshops**, with the remaining 10% coming from Europe, assembled in our workshop in Genk.



Control systems

With the evolution of electronics, multiple options of controlling lighting systems exist.

As a result of our extensive expertise in electricity and home automation over the years, we possess a considerable amount of technical knowledge within our team. The designs crafted by Eden Design are highly advanced from a technical standpoint and will continue to be so.

We provide **personal and customized technical support** for each project.

With our many years of experience, we can offer tailor-made solutions that match the home automation and lighting in a project.

Among others, we work with DALI, Casambi, 0/1-10V... to meet the needs of the customer in every project.

CASAMBI 

Awarded



reddot design award
best of the best 2011

Henry van
de Velde
Awards
Winner

23



WINNER

DESIGN PLUS
powered by: light+building



Dior



BALENCIAGA



Harrods

QATAR

SHISEIDO

WELLS
FARGO

J.P.Morgan



°bubli new


An ode to local craftsmanship. Made in a local workshop where traditional techniques meet contemporary design, each mouth-blown piece is unique in shape, tone, and light diffusion. Subtle variations in the glass reflect the artisanal process and give the lamp its authentic character.

Engineered with a high-quality COB LED and precision glass lens for excellent visual comfort and consistent illumination. Smooth dimming down to 1% or dim-to-warm allows the light atmosphere to be perfectly tailored to any setting.






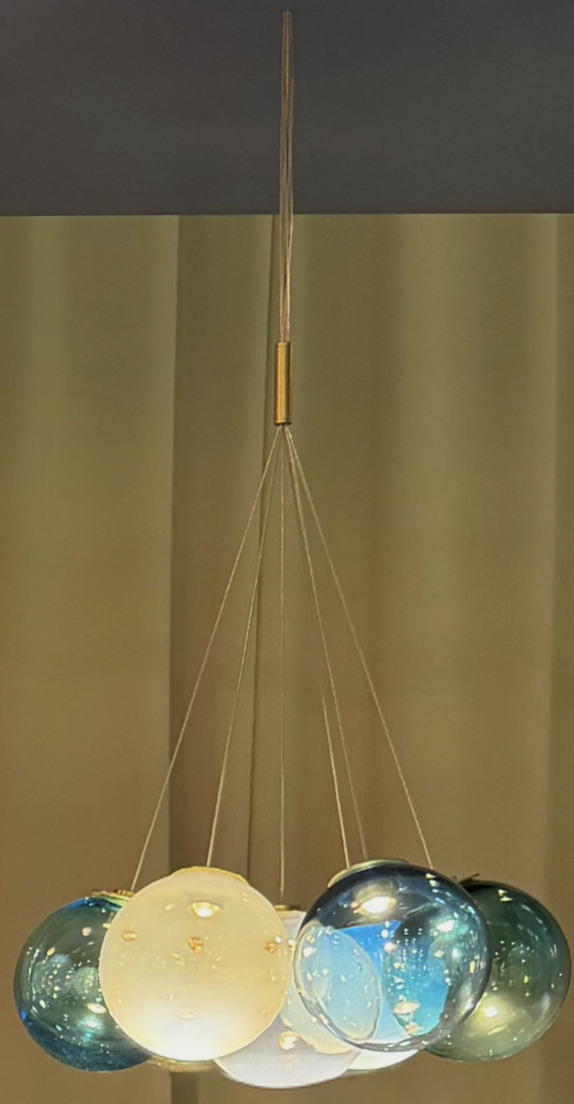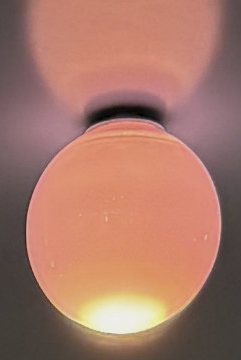



ca. 820 - 32.28



ca. 500 - 19.68



ca. 300 - 11.81



°bubli colors

Please note: colors may vary. Because this product is handmade, the colors of the glass may slightly differ from the images shown on our website. All photos are for reference purposes only. Minor color variations are inherent to the handcrafted nature of the product and make each piece truly unique.

Other colors on request.



02. opal white



03. light beige opal



04. champagne



06. dark gold



10. orange



11. orange beige opal



21. fushia pink



22. pink opal



30. turquoise



31. light blue



32. light blue opal



33. dark blue



40. green



41. blue green



42. olive green dark




43. light green opal



44. olive green light



50. light gray

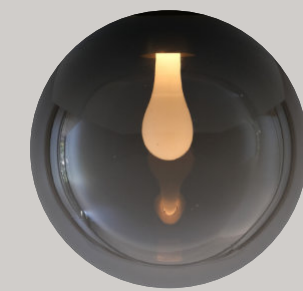

51. gray



60. light brown




62. dark brown

°bubli pendant

materials	aluminum / glass
weight	ca. 1,2 kg - 2,65 lb / pc
voltage	110-240 Vac
wattage	standard 3,3W @180mA (18V) - max 5,3W @300mA
cable length	standard 2m (or custom up to 80m)
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<10

IP20   



ca. Ø 165 - 6.49

Order Code


26000.AAAA.BBBB.CCC bubli single pendant

AA	Color disk	BBBB	Light	CCC	Optic	Output for 3000K 3,3W
01	black	9027	cri 90+, 2700K			
02	white	9030	cri 90+, 3000K			
22	natural alu brushed	DW27	dim to warm 2700K-1800K (on request)			
23	brass alu brushed					
25	bronze alu brushed					
26	dark bronze alu brushed					
27	gun metal alu brushed					
28	nickel alu brushed					
03	custom paint color					
AA	Color glass					
02	white opal					
03	light beige opal					
04	champagne					
06	dark gold					
10	orange					
11	orange beige opal					
21	fushia pink					
22	pink opal					
30	turquoise					
31	light blue					
32	light blue opal					
33	dark blue					
40	green					
41	blue green					
42	olive green dark					
43	light green opal					
44	olive green light					
50	light gray					
51	gray					
60	light brown					
62	dark brown					

°bubli ceiling / wall

materials	aluminum / glass
weight	ca. 1,2 kg - 2,65 lb / pc
voltage	110-240 Vac
wattage	standard 3,3W @180mA (18V) - max 5,3W @300mA
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<10

IP20   



ca. Ø 165 - 6.49

Order Code

26001.AAAA.BBBB.CCC


bubli single ceiling/wall mount (remote driver)

AA	Color disk	BBBB	Light	CCC	Optic	Output for 3000K 3,3W
01	black	9027	cri 90+, 2700K			
02	white	9030	cri 90+, 3000K			
22	natural alu brushed	DW27	dim to warm 2700K-1800K (on request)			
23	brass alu brushed					
25	bronze alu brushed					
26	dark bronze alu brushed					
27	gun metal alu brushed					
28	nickel alu brushed					
03	custom paint color					
AA	Color glass					
02	white opal					
03	light beige opal					
04	champagne					
06	dark gold					
10	orange					
11	orange beige opal					
21	fushia pink					
22	pink opal					
30	turquoise					
31	light blue					
32	light blue opal					
33	dark blue					
40	green					
41	blue green					
42	olive green dark					
43	light green opal					
44	olive green light					
50	light gray					
51	gray					
60	light brown					
62	dark brown					

°bubli track

materials	aluminum / glass
weight	ca. 1,2 kg - 2,65 lb / pc
voltage	48 Vdc
wattage	standard 3,3W @180mA (18V) - max 5,3W @300mA
cable length	for pendant:standard 2m (or custom up to 80m)
dimming	dali, casambi
ugr	<10

IP20   

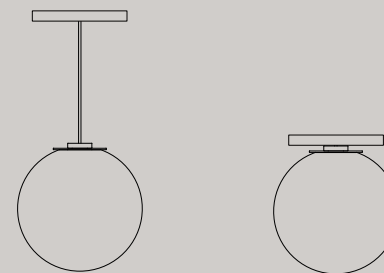

ca. Ø 165 - 6.49

Order Code

26200.AAAA.BBBB.CCC.DD
26201.AAAA.BBBB.CCC.DD
26202.AAAA.BBBB.CCC.DD
26203.AAAA.BBBB.CCC.DD

bubli track line S on track, black adaptor
 bubli track line S pendant - custom cable length, black adaptor
 bubli track line S on track, white adaptor
 bubli track line S pendant - custom cable length, white adaptor

AA Color disk

01 black
 02 white
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 03 custom paint color

AA Color glass

02 white opal
 03 light beige opal
 04 champagne
 06 dark gold
 10 orange
 11 orange beige opal
 21 fushia pink
 22 pink opal
 30 turquoise
 31 light blue
 32 light blue opal
 33 dark blue
 40 green
 41 blue green
 42 olive green dark
 43 light green opal
 44 olive green light
 50 light gray
 51 gray
 60 light brown
 62 dark brown

BBBB Light

9027 cri 90+, 2700K
 9030 cri 90+, 3000K
 DW27 dim to warm 2700K-1800K (on request)

CCC Optic

500 lens glass 50°
 001 opal drop

Output for 3000K 3,3W

up to 300lm (depending on color glass)
 up to 100lm (depending on color glass)

DD Dimming

ND no dim
 DA dali
 CA casambi

°bubli accessories

Order Code

Recessed

91004.AA00 recessed canopy - for single or bundle 3/7



26520.AA00 tube bundle 3/7

26521.AA00 tube bundle 19



AA Color

01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
03	custom paint color

Surface mounted

26500.AA00 canopy single (remote driver)

26501.AA00 round canopy single

26502.AA00 round canopy 3

26503.AA00 round canopy 5

26504.AA00 round canopy 7

26505.AA00 round canopy 12

26506.AA00 round canopy 16

26507.AA00 round canopy 20

265xx.AA00 round canopy custom

26511.AA00 round canopy bundle 3/7

26512.AA00 round canopy bundle 19

26515.AA00 long canopy 5

26516.AA00 long canopy 7

26517.AA00 long canopy 9

AA Color

01	black
02	white

Order Code

Cable

26540 extension cable 4m total length

26541 extension cable 6m total length

26542 extension cable 8m total length

26543 extension cable 12m total length

26544 extension cable 20m total length

26545 extension cable 50m total length

Order Code

Drivers

90050.0000	10W constant current mini led driver PHASE CUT dim - 230Vac	1-3
90051.0000	10W constant current mini led driver DALI dim - 230Vac	1-3
90052.0000	10W constant current mini led driver CASAMBI dim - 230Vac	1-3
90053.0000	10W constant current mini led driver PHASE CUT dim - 120Vac	1-3
90054.0000	10W constant current mini led driver DALI dim - 120Vac - 240Vac	1-3

90041.0000	20W constant current led driver DALI dim - 120-240Vac	4-5
90042.0000	20W constant current mini led driver PHASE CUT dim - 230Vac	4-5
90043.0000	20W constant current mini led driver PHASE CUT dim - 120Vac	4-5

90047.0000	60W constant current maxi led driver DALI/1-10V/push dim - 120-240Vac	6-12
90048.0000	50W constant current maxi led driver PHASE CUT dim - 240Vac	6-12
90049.0000	60W constant current maxi led driver PHASE CUT dim - 120Vac	6-12

90007.0000 casambi to dali interface (up to 40 devices) 110-240Vac

bulbs

°bloc micro ^{new}

°bloc micro brings the same modular logic as °bloc to a smaller, more versatile format. Its compact linear form adapts effortlessly to any space, alone or in composition. The refined pairing of wood and metal remains at its core: warm, precise, and entirely considered.

Available as modular elements, monopoint or profile.




blocline micro with tubu 30 & reflector






°bloc micro

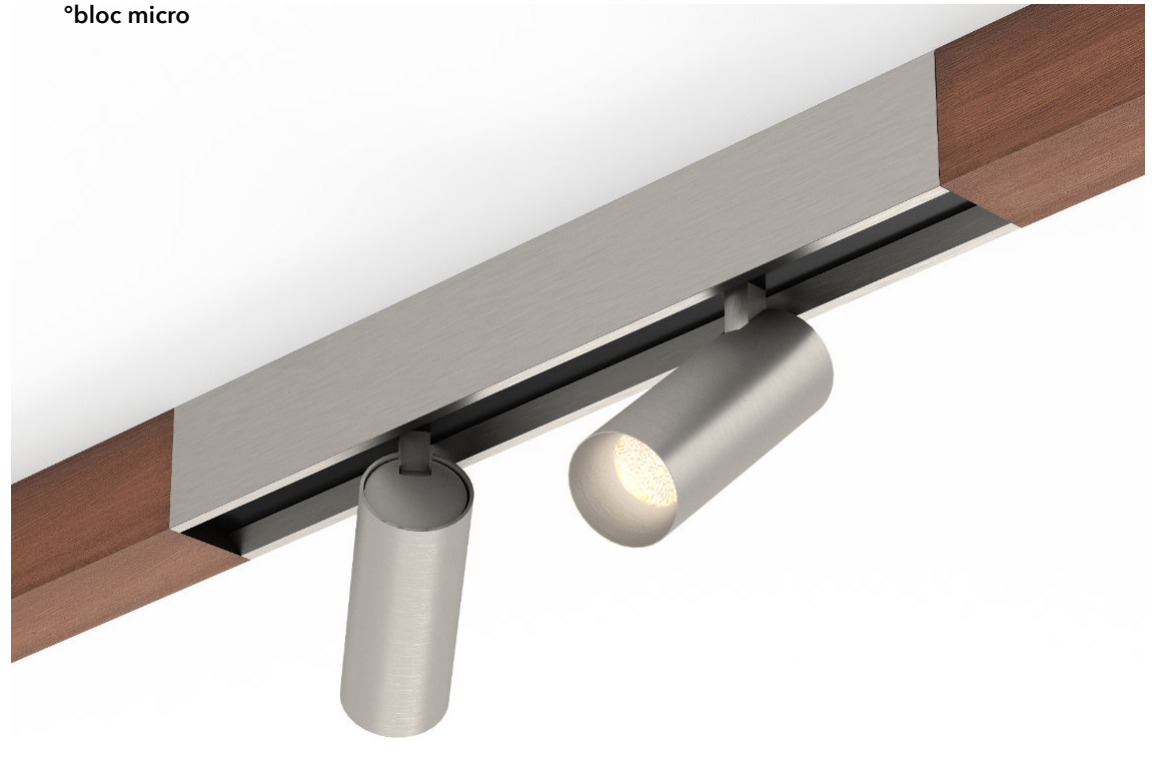

scale 1/1 on print



30 - 1.18

37- 1.45

Choose your combination of wood and metal, define your layout, and set your light accents, precisely as you want them.

Modules are available with opal diffused light, double spot configurations, or UGR-controlling reflectors.

Even a 240V power connection is discreetly integrated into the slim profile, making bloc ideal for surface-mounted applications.

Within the same collection, long aluminium profiles (pendant or surface mounted) and monopoint versions are also available.


°bloc micro spot

materials	aluminum / PC
weight	280 / 560 / 840 gr - 0.61 / 1.10 / 1.85 lb
voltage	48 Vdc
wattage	15W - 30W - 45W
ugr	<19

IP20  CE ENEC



bloc micro spot 560

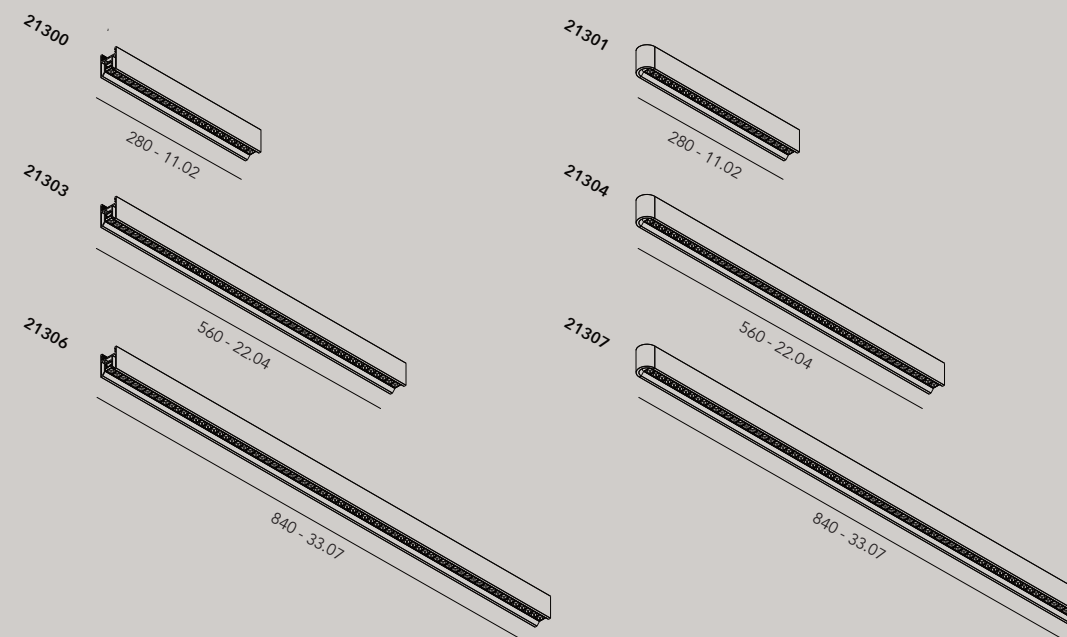

Order Code

21300.AA00.BBBB.CCC.DD	bloc micro spot 280
21301.AA00.BBBB.CCC.DD	bloc micro spot 280 end
21303.AA00.BBBB.CCC.DD	bloc micro spot 560
21304.AA00.BBBB.CCC.DD	bloc micro spot 560 end
21306.AA00.BBBB.CCC.DD	bloc micro spot 840
21307.AA00.BBBB.CCC.DD	bloc micro spot 840 end

AA	Finish	CCC	Optic	for 3000K, 280 mm
01	black	306	30° matt black reflector	1245 lm
02	white	506	50° matt black reflector	1274 lm
22	natural alu brushed	307	30° matt white reflector	1245 lm
23	brass alu brushed	507	50° matt white reflector	1274 lm
25	bronze alu brushed			
26	dark bronze alu brushed			
27	gun metal alu brushed			
28	nickel alu brushed			
32	copper alu brushed			
03	painting custom NCS color			

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

DD	Dimming
ND	no dim
DA	dali (0/1-10V through interface)
CA	casambi


° bloc micro stripe

materials	aluminum / PC
weight	280 / 560 / 840 gr - 0.61 / 1.10 / 1.85 lb
voltage	48 Vdc
wattage	15W - 30W - 45W

IP20  CE ENEC



bloc micro stripe 280

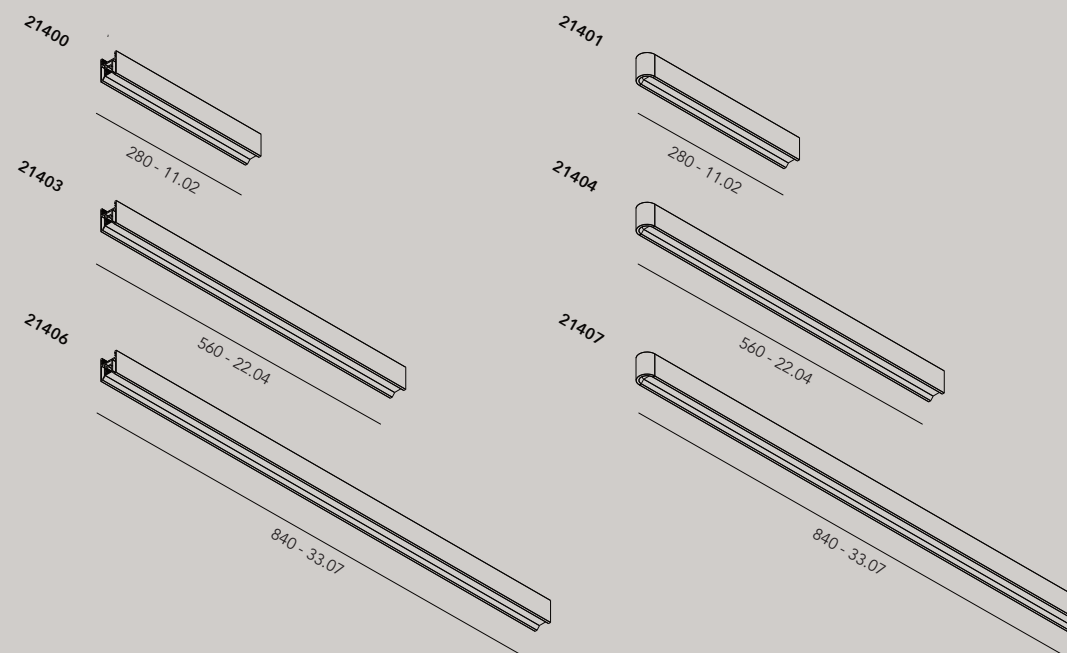

Order Code

21400.AA00.BBBB.CCC.DD
 21401.AA00.BBBB.CCC.DD
 21403.AA00.BBBB.CCC.DD
 21404.AA00.BBBB.CCC.DD
 21406.AA00.BBBB.CCC.DD
 21407.AA00.BBBB.CCC.DD

bloc micro stripe 280
 bloc micro stripe 280 end
 bloc micro stripe 560
 bloc micro stripe 560 end
 bloc micro stripe 840
 bloc micro stripe 840 end

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K


CCC	Optic	for 3000K, 280 mm
001	frosted ice opal	880 lm

DD	Dimming
ND	no dim
DA	dali (0/1-10V through interface)
CA	casambi

°bloc micro tubu30

materials aluminum / glass lens
 weight 500 gr / 1.10 lb
 voltage 48Vdc
 wattage 2x 5,5W
 ugr <19

IP20   



Order Code

21100.AA00.BBBB.CCC.DD


bloc micro - spot double °tubu 30 - 280 mm

AA	Finish	CCC	Optic	for 3000K, single spot
01	black	200	20°	280lm - 1700cd
02	white	300	30°	520lm - 1900cd
22	natural alu brushed	500	50°	570lm - 800cd
23	brass alu brushed			
25	bronze alu brushed			
26	dark bronze alu brushed			
27	gun metal alu brushed			
28	nickel alu brushed			
32	copper alu brushed			
03	painting custom NCS color			
BBBB	Light	DD	Dimming	
9527	cri 95, 2700K	ND	no dim	
9530	cri 95, 3000K	DA	dali (0/1-10V through interface)	
		CA	casambi	


° bloc micro

materials oak / walnut
weight 175 / 350 / 525 gr - 0.38 / 0.77 / 1.15 lb

IP20  CE ENEC

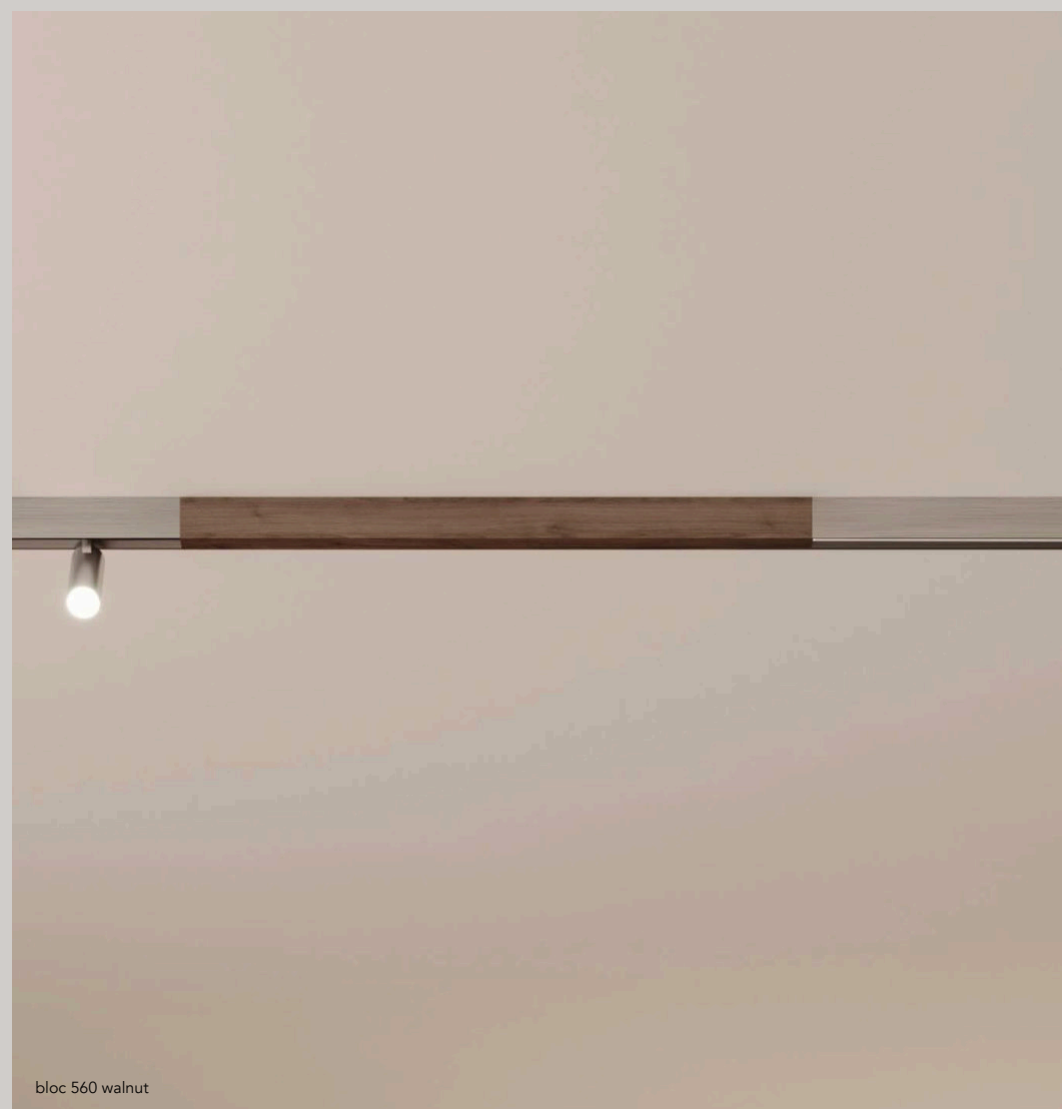

bloc 560 walnut

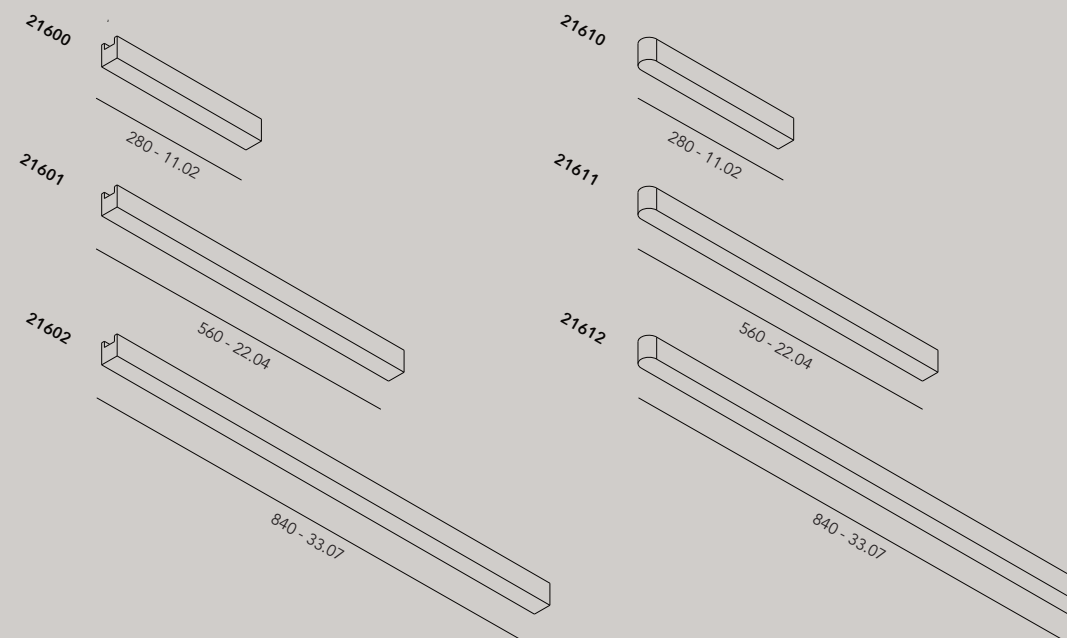

Order Code

21600.AA00	bloc micro 280
21601.AA00	bloc micro 560
21602.AA00	bloc micro 840
21610.AA00	bloc micro 280 end
21611.AA00	bloc micro 560 end
21612.AA00	bloc micro 840 end

21621.AA00	bloc micro 560 incl. driver 100W (230V only)
21622.AA00	bloc micro 840 incl. driver 100W (230V only)
21623.AA00	bloc micro 560 end incl. driver 100W (230V only)
21624.AA00	bloc micro 840 end incl. driver 100W (230V only)
21626.AA00	bloc micro 840 end incl. driver 60W (110V)

AA	Finish
01	black
02	white
03	painting custom NCS color
40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye

Custom material on request
Oak can be dyed in reference color


bloc micro spot

bloc micro stripe

bloc 2x tubu30

bloc micro

bloc micro round end

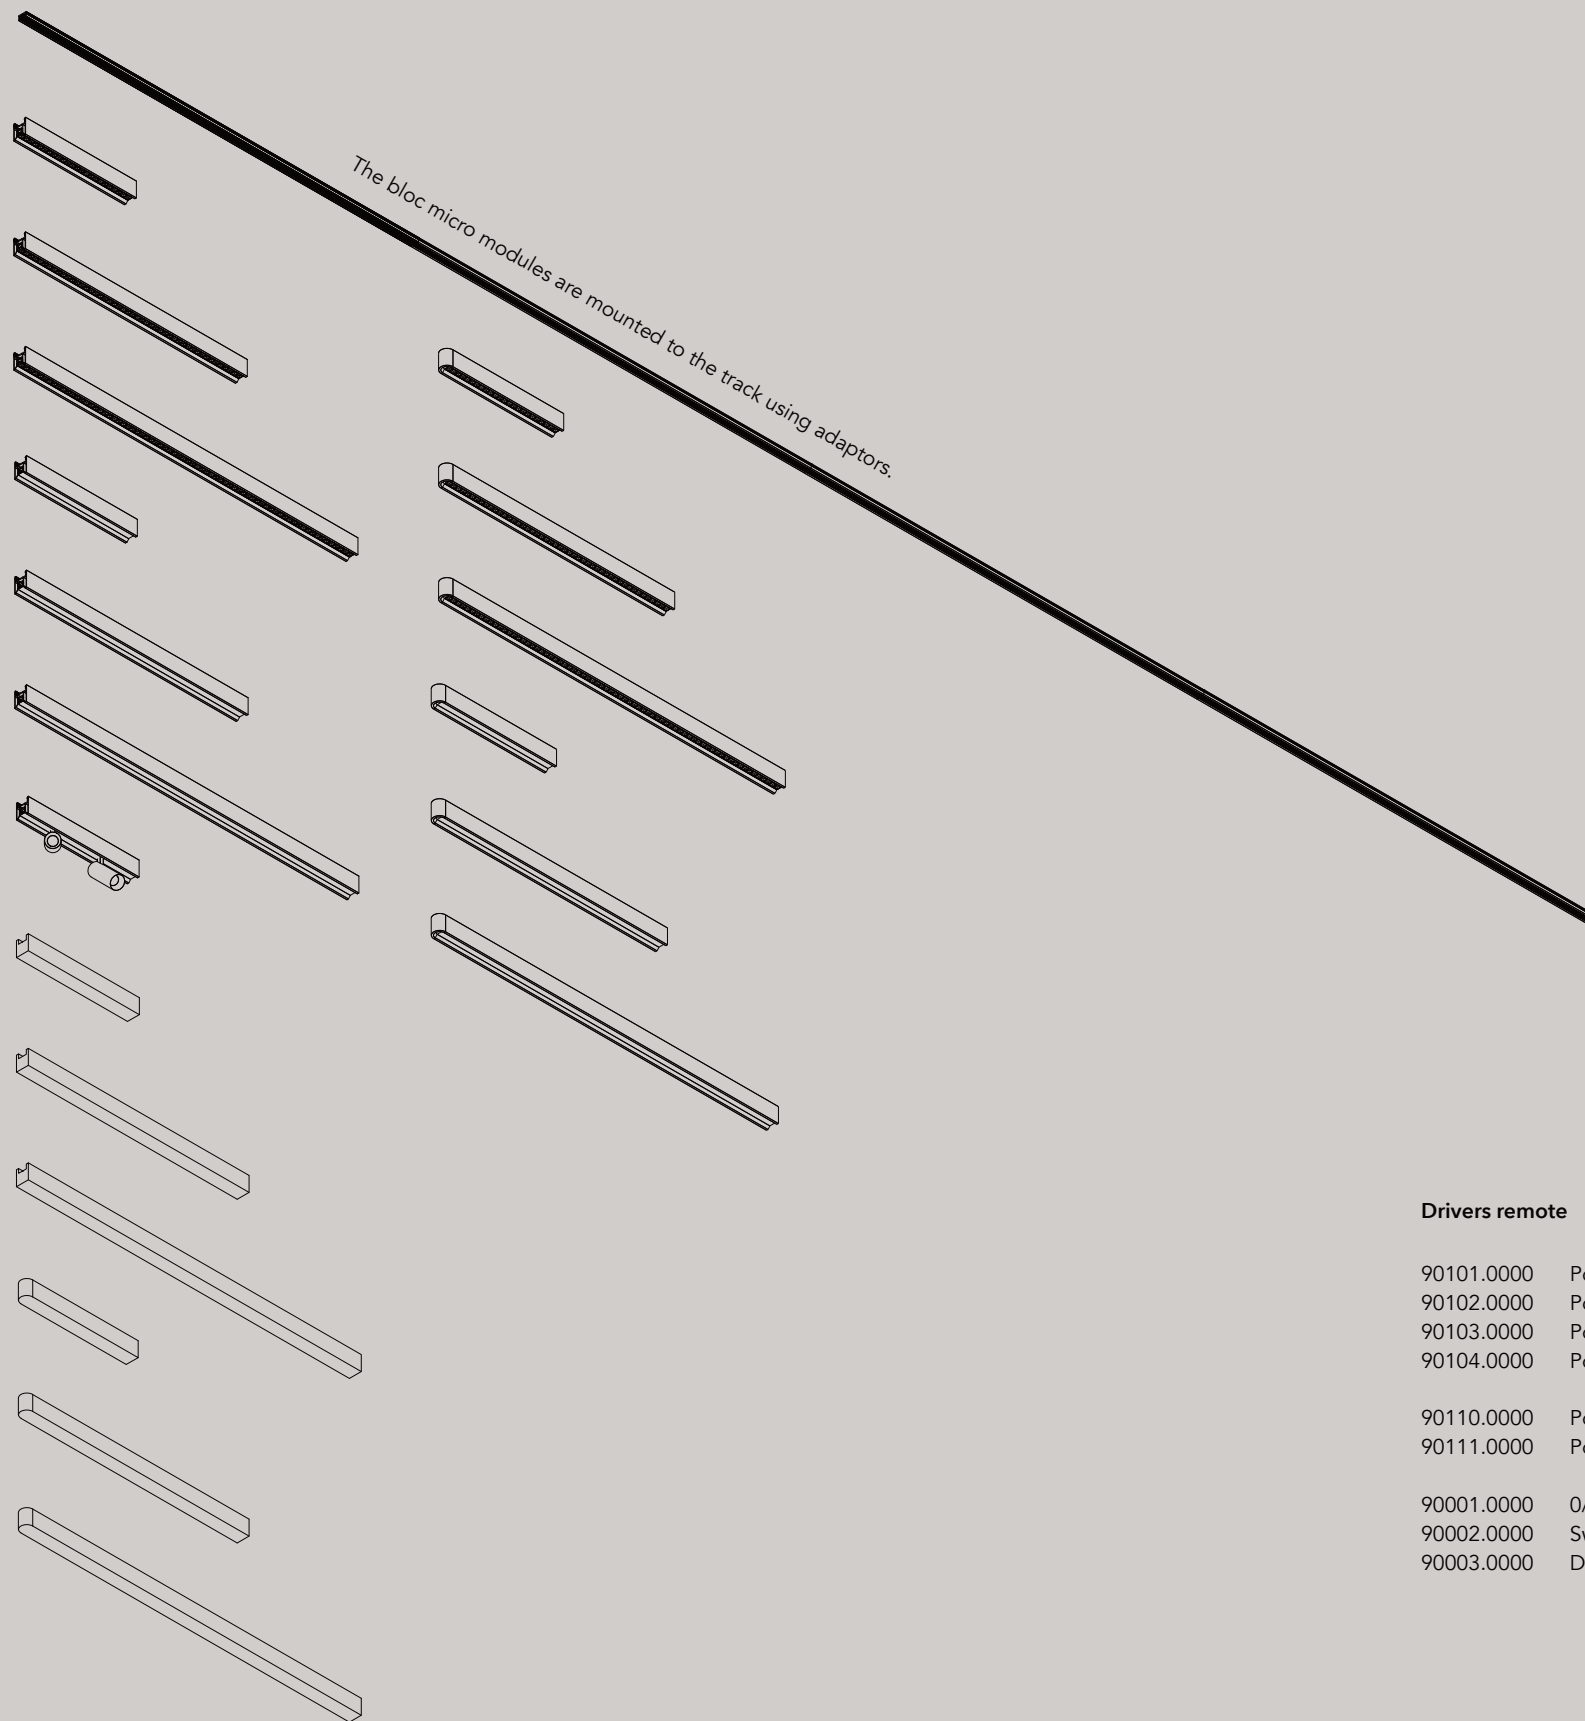

We recommend to always alternate between the materials.

There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.

Track

Order Code

30001.AA00.BBBB line.m1

AA Finish

01 black

BBBB Length

1000 1000 mm
 2000 2000 mm
 3000 3000 mm
 xxxx xxxx mm (custom length)

Track Accessories

30221.0100 electrical feeder



30230.0100 electrical jointing connector 180° black



Drivers remote

- 90101.0000 Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90102.0000 Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90103.0000 Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90104.0000 Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified

- 90110.0000 Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
- 90111.0000 Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed

- 90001.0000 0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
- 90002.0000 Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
- 90003.0000 Dali opto insulator for galvanic isolation


°bloc micro mono

materials	aluminum / PC
weight	280 / 560 / 840 gr - 0.61 / 1.10 / 1.85 lb
voltage	110-230 Vac
wattage	15W - 30W - 45W
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<19

IP20  CE ENEC



bloc 280 monopoint surface reflector

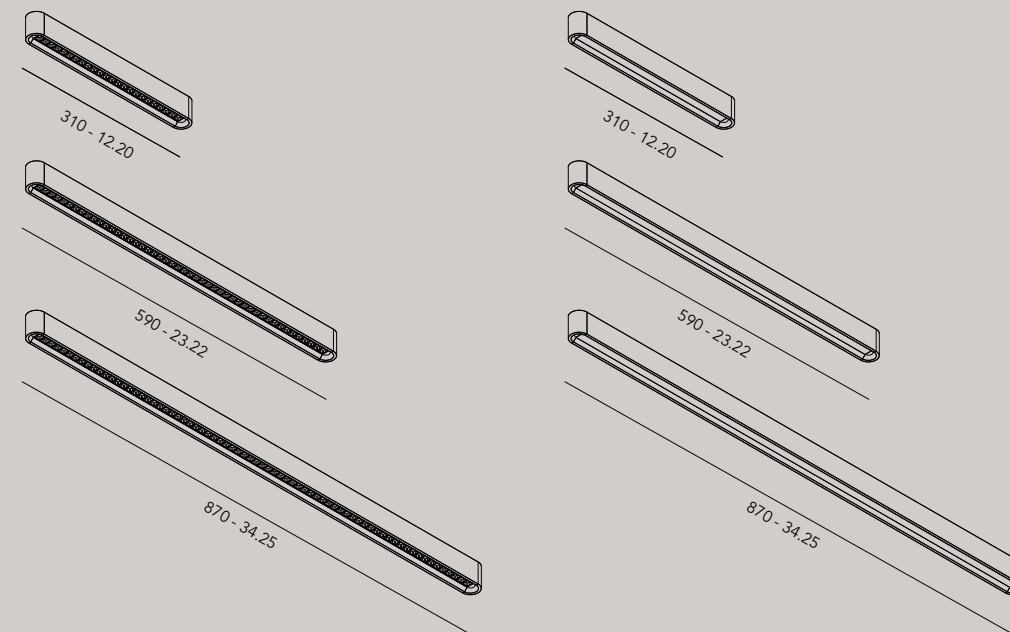

Order Code

21700.AA00.BBBB.CCC
21701.AA00.BBBB.CCC
21702.AA00.BBBB.CCC


bloc micro 280 monopoint (remote driver)
bloc micro 560 monopoint (remote driver)
bloc micro 840 monopoint (remote driver)

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K


CCC	Optic	for 3000K, 280 mm
001	frosted ice opal	880 lm
306	30° matt black reflector	1245 lm
506	50° matt black reflector	1274 lm
307	30° matt white reflector	1245 lm
507	50° matt white reflector	1274 lm

° bloc line micro

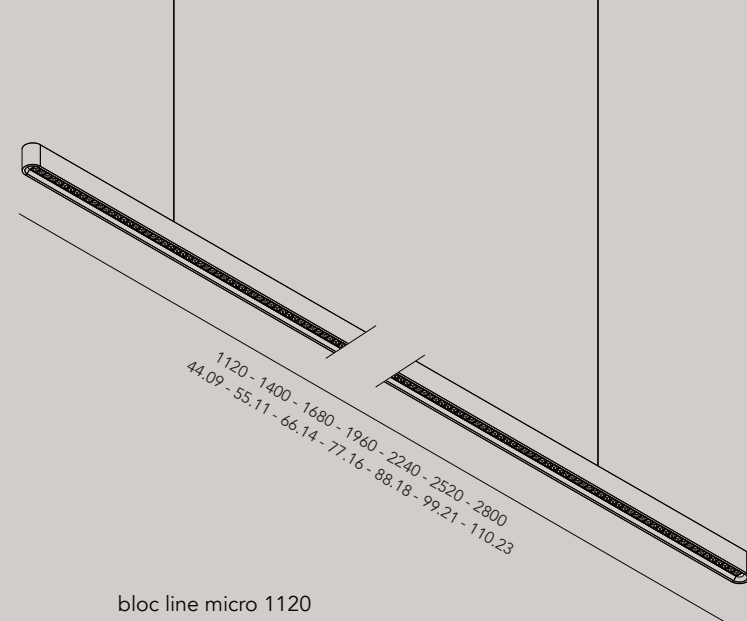

materials aluminum / PC
 weight 950 gr/m
 voltage 24 Vdc
 wattage opal 28W/m (with uplight +10W/m)
 spot 20W/m (with uplight +10W/m)
 dimming dali, 0/1-10V, phase cut, casambi (remote driver required)
 ugr <19 for spot

IP20

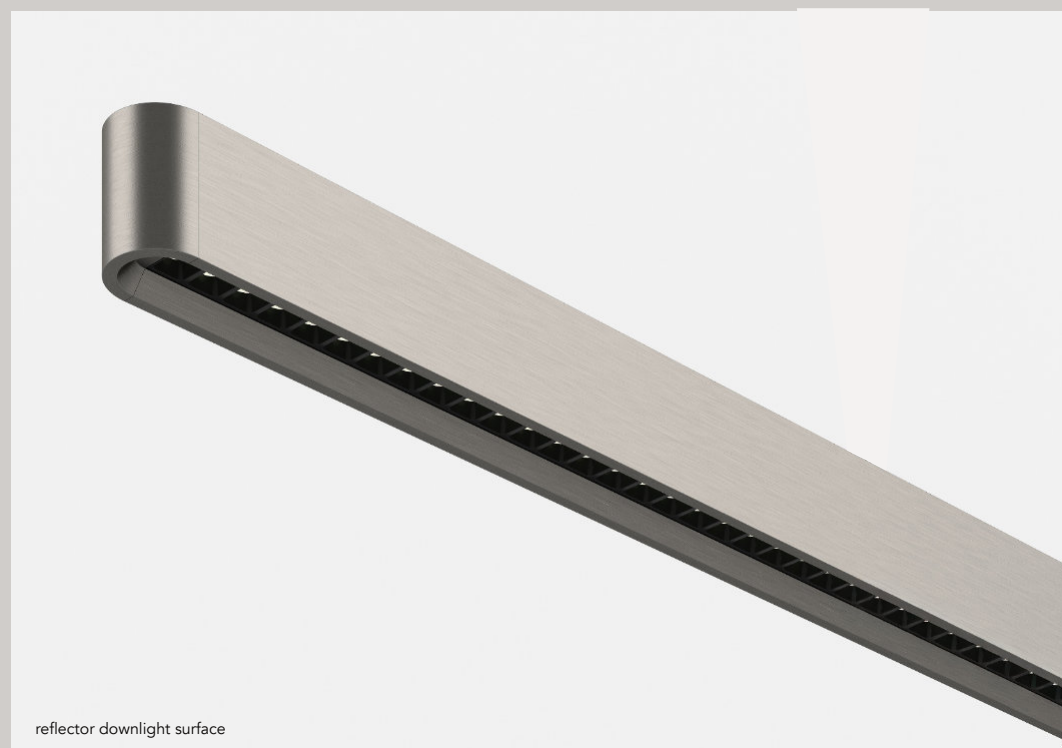

reflector downlight surface



opal downlight pendant

black cover pendant

uplight pendant

Order Code

Pendant or Surface

21804.AA00.BBBB.CCC.EE bloc line micro 1120
 21805.AA00.BBBB.CCC.EE bloc line micro 1400
 21806.AA00.BBBB.CCC.EE bloc line micro 1680
 21807.AA00.BBBB.CCC.EE bloc line micro 1960
 21808.AA00.BBBB.CCC.EE bloc line micro 2240
 21809.AA00.BBBB.CCC.EE bloc line micro 2520
 21810.AA00.BBBB.CCC.EE bloc line micro 2800
 21900.AA00.BBBB.CCC.EE bloc line micro custom length (combination of standard lengths)

21931.AA00.BBBB.CCC.DD bloc line module double °tubu 30 - 280mm, integrated in profile

Required accessories

91010 Ledline 16 canopy surface mount
 91004 Ledline 16 canopy recessed
 21291 Mechanical connector 180°
 Remote drivers 24V see page 133

AA	Finish	CCC	Optic	for 3000 K
01	black	001	frosted ice opal	1800 lm/m
02	white	306	30° matt black reflector	460 lm / module 280mm
22	natural alu brushed	506	50° matt black reflector	440 lm / module 280mm
23	brass alu brushed	307	30° matt white reflector	460 lm / module 280mm
25	bronze alu brushed	507	50° matt white reflector	440 lm / module 280mm
26	dark bronze alu brushed			
27	gun metal alu brushed			
28	nickel alu brushed			
32	copper alu brushed			
03	painting custom NCS color			
		EE	Uplight	
00	Suspension	00	none	
00	surface	01	uplight (same K as downlight)	
01	pendant		remark: separately dimmable with extra driver, two power feeds required	
BBBB	Light			
9527	cri 95, 2700K			
9530	cri 95, 3000K			
TW00	tunable white (on request)			

°ledline 16^{new}

Refined, architectural, and exceptionally slender — °ledline 16 is a minimalist linear luminaire designed to blend seamlessly into contemporary interiors while delivering precise, high-quality illumination.

At just 16mm in width, °ledline 16 offers an elegant lighting solution that feels almost invisible in space. Its ultra-slim profile makes it ideal for kitchens, workspaces, hospitality settings, retail environments, and residential applications where clean lines matter.





flat cap




round cap 1




round cap 2

scale 1/1 on print

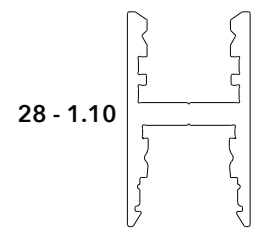

28 - 1.10

16 - 0.63

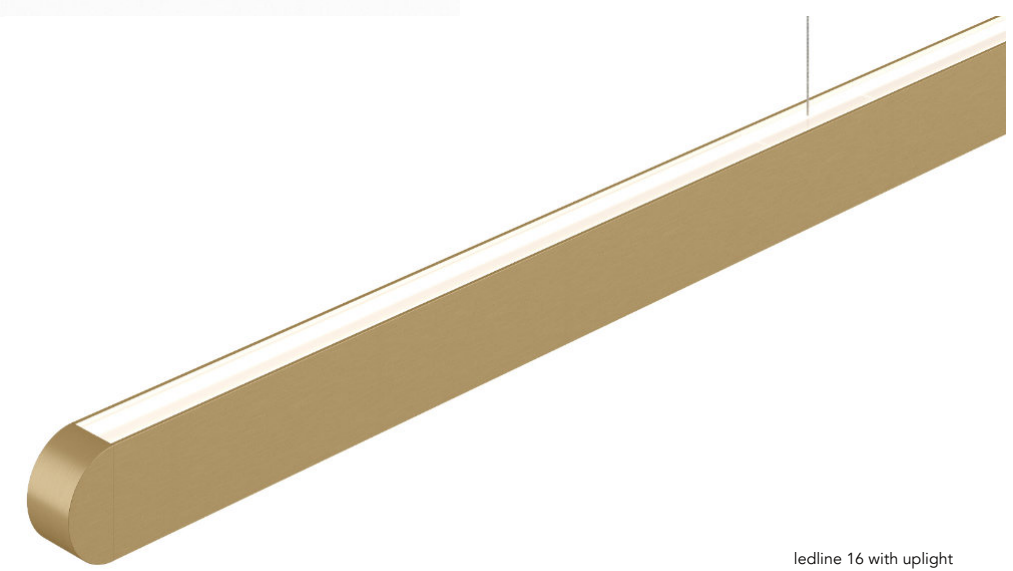


ledline 16 with uplight

°ledline 16

materials	aluminum / PC
weight	950 gr/m
voltage	24 Vdc
wattage	opal 28W/m (with uplight +10W/m) spot 20W/m (with uplight +10W/m)
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<19 for spot

IP20  CE ENEC

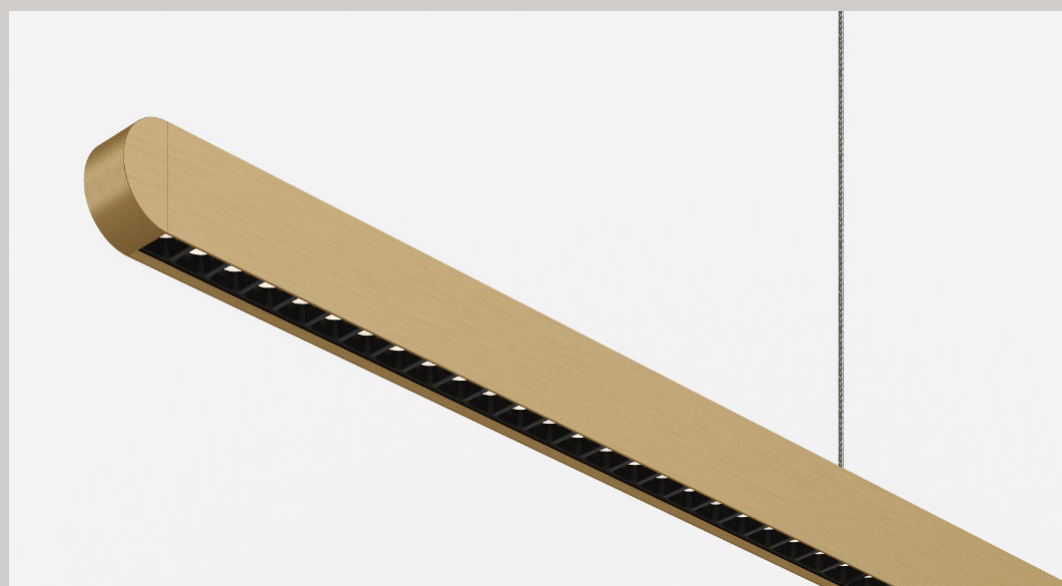

Order Code

Pendant or Surface

03504.AA00.BBBB.CCC.EE
03505.AA00.BBBB.CCC.EE
03506.AA00.BBBB.CCC.EE
03507.AA00.BBBB.CCC.EE
03508.AA00.BBBB.CCC.EE
03509.AA00.BBBB.CCC.EE
03510.AA00.BBBB.CCC.EE
03511.AA00.BBBB.CCC.EE

Ledline 16 1120 mm
Ledline 16 1400 mm
Ledline 16 1680 mm
Ledline 16 1960 mm
Ledline 16 2240 mm
Ledline 16 2520 mm
Ledline 16 2800 mm
Ledline 16 custom length (combination of standard lengths)

Required accessories

End Cap

03530.AA00
03531.AA00
03532.AA00

Ledline 16 end cap flat (set of 2)
Ledline 16 end cap round 1 (set of 2)
Ledline 16 end cap round 2 (set of 2)

Canopy

91010.AA00
91004.AA00

Ledline 16 canopy surface mount
Ledline 16 canopy recessed

Connector

03580

Mechanical connector 180°

Remote drivers 24V

See page 133

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color




CCC	Optic	for 3000 K
001	frosted ice opal	1800 lm/m
306	30° matt black reflector	460 lm / module 280mm
506	50° matt black reflector	440 lm / module 280mm
307	30° matt white reflector	460 lm / module 280mm
507	50° matt white reflector	440 lm / module 280mm

EE Uplight

00 none
01 uplight (same K as downlight)
remark: separately dimmable with extra driver
two power feeds required

00	Suspension
00	surface
01	pendant

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K
TW00	tunable white (on request)

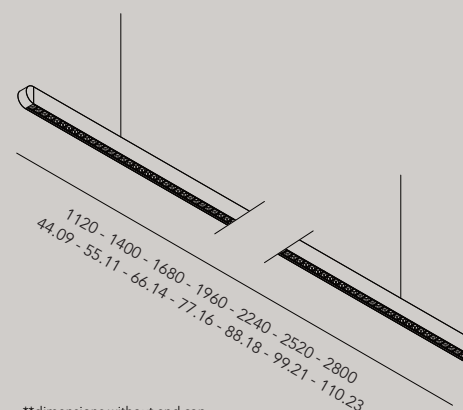


**dimensions without end cap

*for round cap 1

°ledline 16 mono

materials	aluminum / PC
weight	180 / 360 / 540 gr
voltage	110-230 Vac
wattage	7,5W - 15W - 22,5W
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<19

IP20  CE ENEC

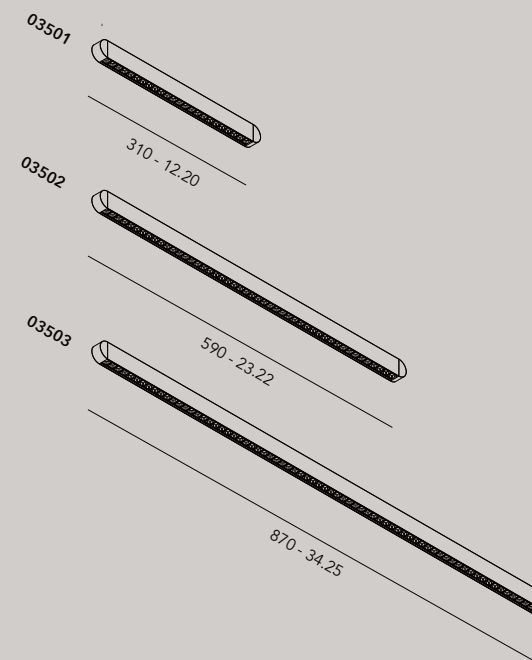

Order Code

Monopoint

03501.AA00.BBBB.CCC
 03502.AA00.BBBB.CCC
 03503.AA00.BBBB.CCC
 03504.AA00.BBBB.CCC
 03505.AA00.BBBB.CCC
 03506.AA00.BBBB.CCC
 03507.AA00.BBBB.CCC
 03508.AA00.BBBB.CCC
 03509.AA00.BBBB.CCC

Ledline 16 280 mm - round 1 end caps (remote driver)
 Ledline 16 540 mm - round 1 end caps (remote driver)
 Ledline 16 840 mm - round 1 end caps (remote driver)
 Ledline 16 280 mm - round 2 end caps (remote driver)
 Ledline 16 540 mm - round 2 end caps (remote driver)
 Ledline 16 840 mm - round 2 end caps (remote driver)
 Ledline 16 280 mm - flat end caps (remote driver)
 Ledline 16 540 mm - flat end caps (remote driver)
 Ledline 16 840 mm - flat end caps (remote driver)

AA	Color disk
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	for 3000K, 280 mm
001	frosted ice opal	440 lm
306	30° matt black reflector	622 lm
506	50° matt black reflector	635 lm
307	30° matt white reflector	622 lm
507	50° matt white reflector	635 lm

°plug

Is a minimalistic tubular light fixture that allows infinite variations. The modular light line consists of tubes that form a luminous network. The name refers to the 'jack plug', an electrical connector that provides a simple switching principle. °plug makes all conceivable connections possible in a grid with building blocks of 15 cm.



DESIGN PLUS
powered by: light+building
WINNER 2024


archiproducts
DESIGN AWARDS
WINNER

**Henry van
de Velde
Awards**

23
Winner



A minimalistic tubular fitting on which you can vary infinitely using a simple plug. The tubes connect like a luminous network of tunnels with light at the end of the tunnel.

The name °plug clearly refers to the 'jack plug', an electrical plug connection that we all know from, among other things, headphones. It is this simple switching principle of the concentric plug that forms the base of the luminous as well as atmospheric light line. °plug can be combined lightly and infinitely, but in the design, Frits Jeuris also connects deeper stories of a glowing past.

Do you want to link the spot to the led line, or rather extend it in the dark, emphasize it later, branch or bend it? Everything is possible. With °plug you go ahead. "The idea originated with the thought of the mines", says designer Frits Jeuris. Even more than the underground network and those connections, I wanted to highlight the powerful message of the former miners.

They consider the special togetherness of which they always speak, as an unstoppable source of energy. Several times they mentioned that 'everyone was black in the pit'. In that dark end period for the Belgian mines, Frits Jeuris saw a bright spot for the future.

In Eden Design – itself located between the former mines of Zwartberg and Winterslag – sparkles the energy of that mines past. "When developing the luminaire in the production hall of Eden Design, collaborating with these burly craftsmen, I saw those weathered hands again and arms full of tattoos, full of mine references. Everything clicked together so wonderfully for me, that it seemed predestined."

°plug is so much more than a modular light line. It is an ode to the energy changing form.

Oval & Linear

Different types of curves allow to design beautiful oval & round compositions.

With the wall brackets you can create long linear wall compositions.



Ø16mm

°plug

63



360°

360°

Up- & downlight

The very slim tube gives your interior a unique look. All the elements can be rotated 360°, allowing a creative and functional light design.

Different colors




Up to 300 lumen

Grid

Combining lighting elements with stylish angular and connecting elements can make a bespoke grid, adapted to your requirements.



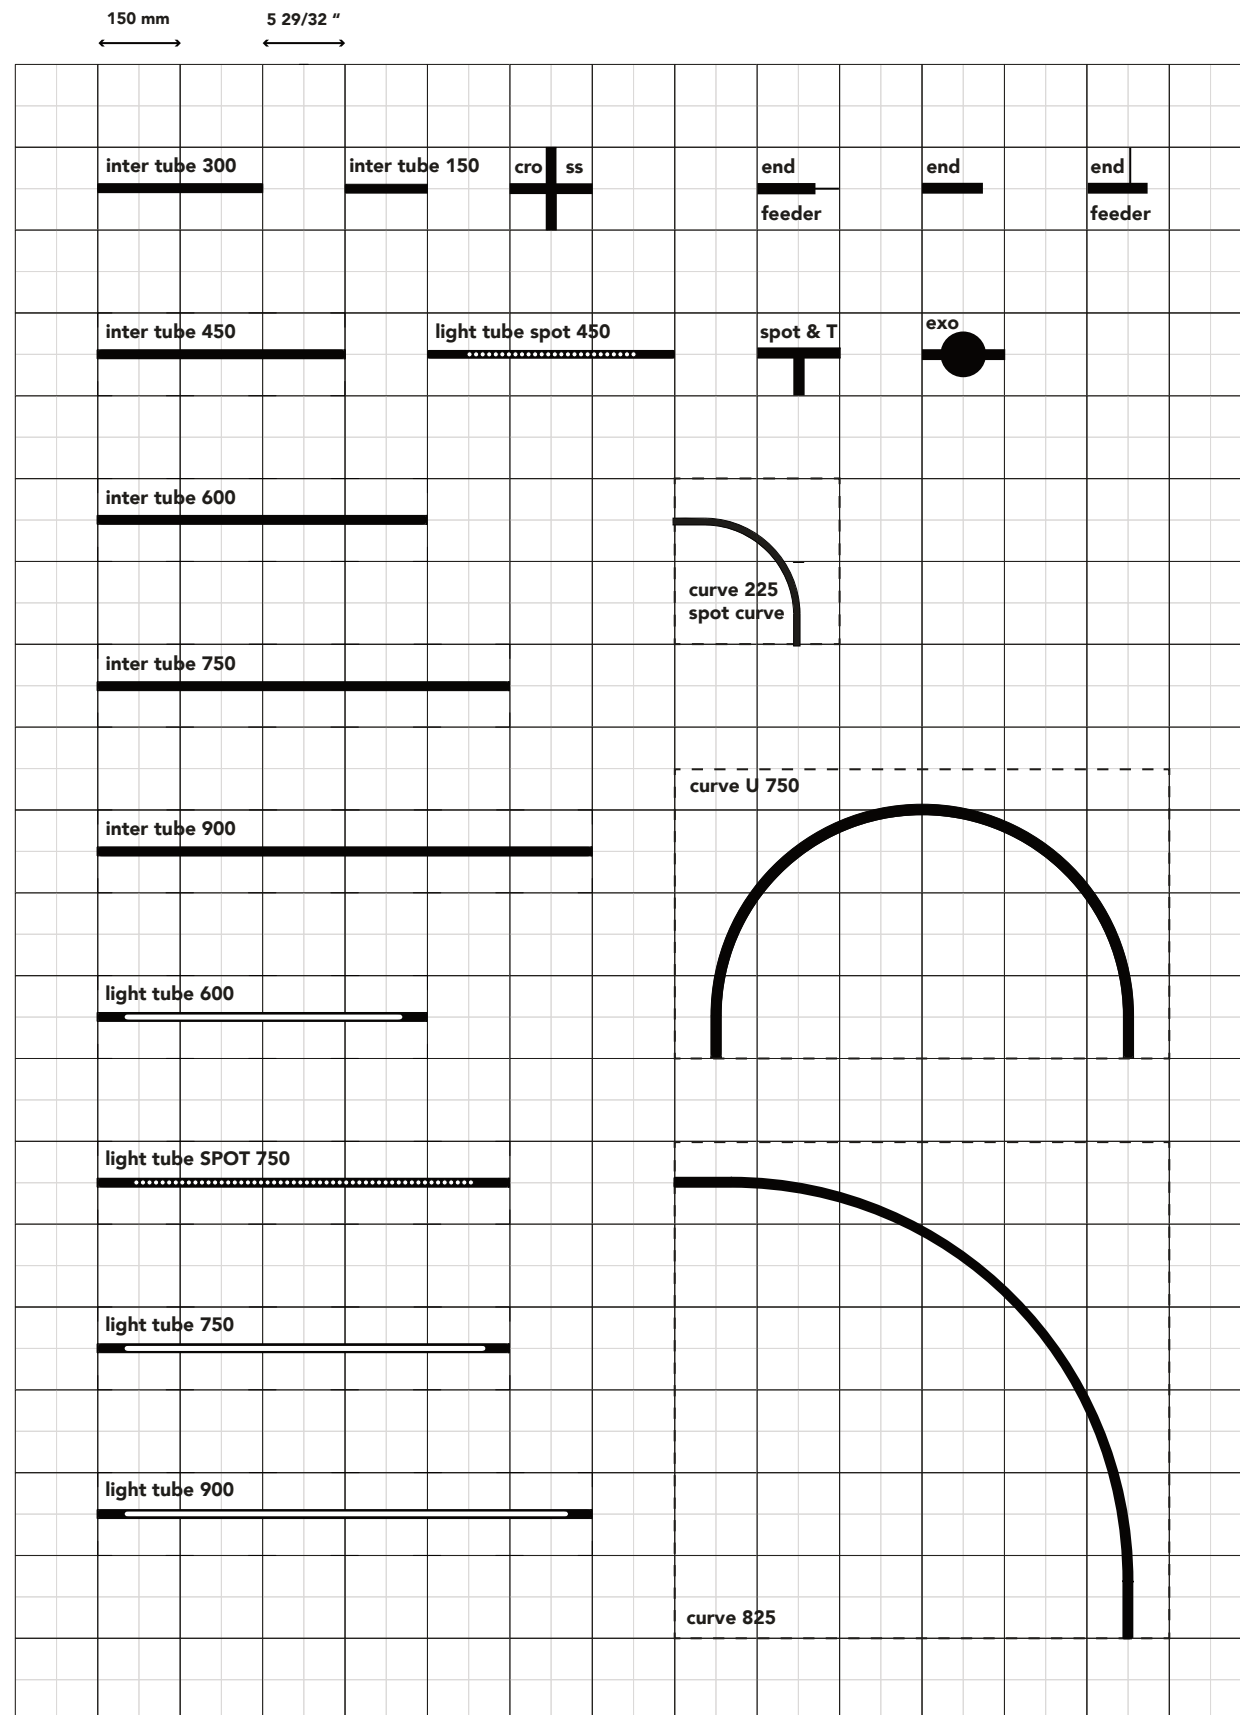

Plug & Play

The basis of this system is the "jack plug". It is being repurposed to connector and sliding contact, combined with LED technology.

Every part can be plugged into another, rotated 360 degrees and modulated in an imaginary 3D grid.

Modulation is done with a simple system: every module is 15cm or a multiple of it. To merge the parts, no tools are required.

Think of a sober simple line above a table, or a busy network, running through a whole building ...


Available in brass, bronze & natural aluminum colors or painted in black, white or custom color.

● scale 1:1
 (catalog format, unscaled printed)
 diameter 16 mm - 5/8 in



°plug - overview

Infinite Possibilities

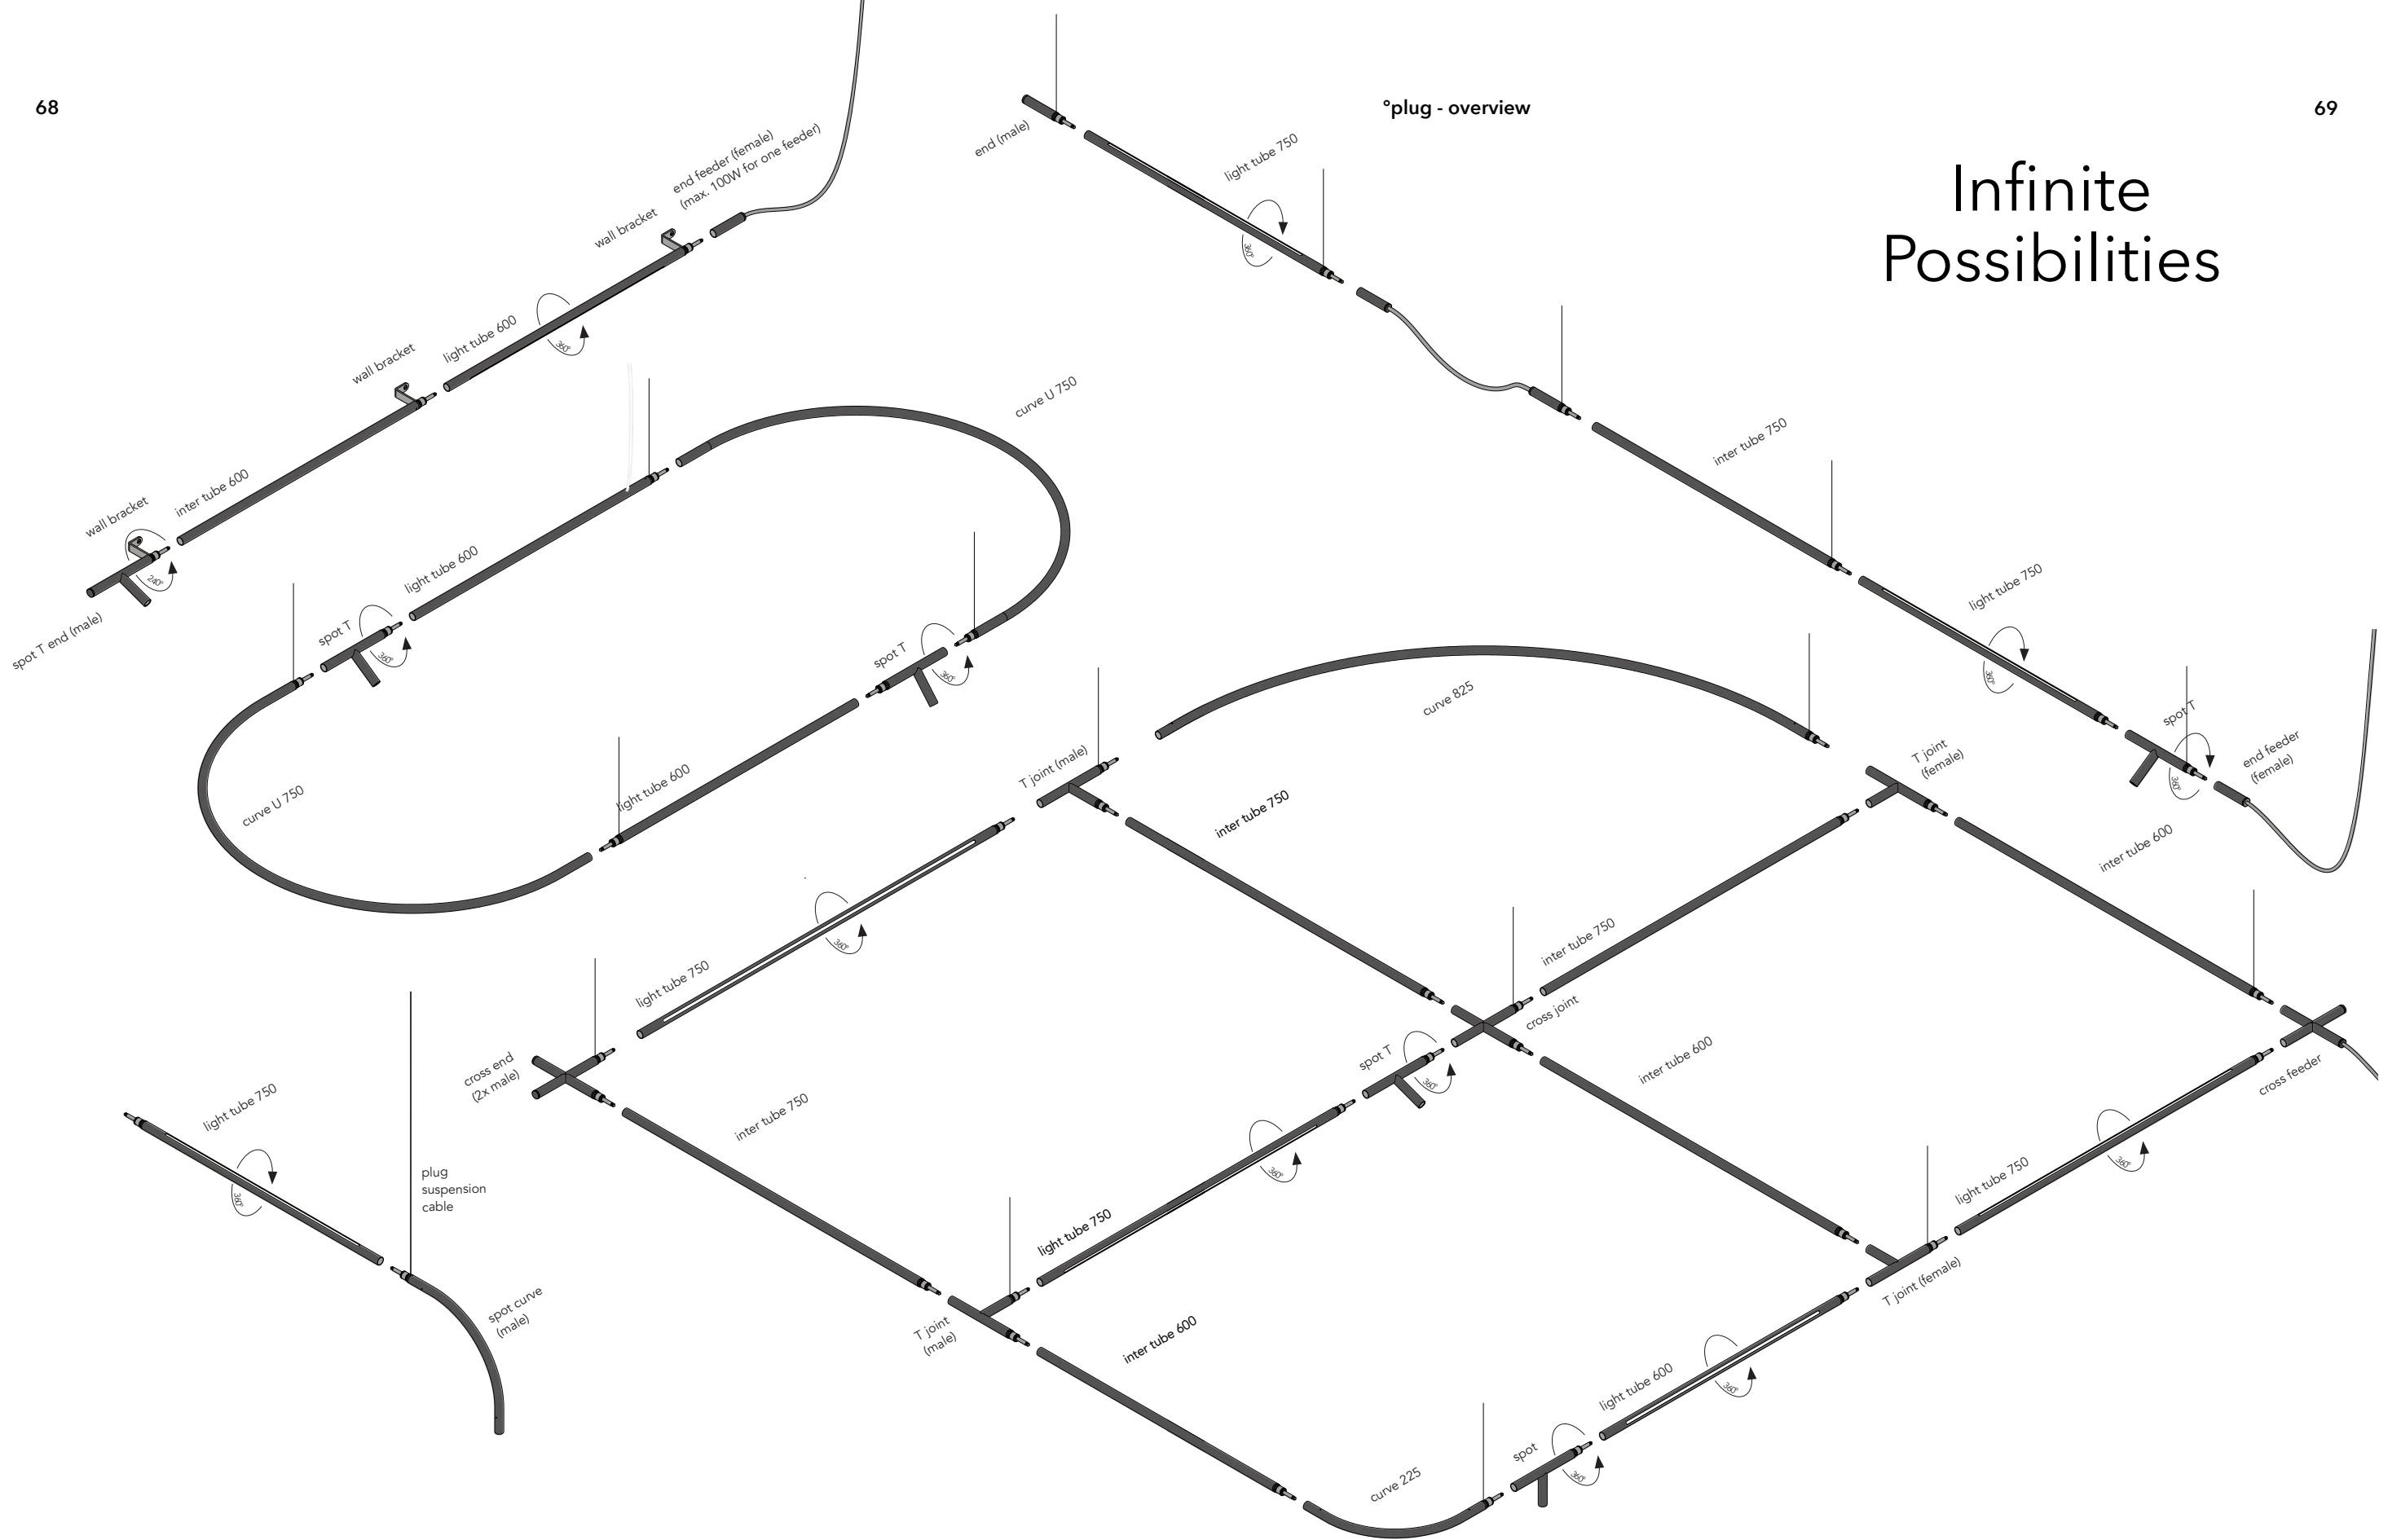

°spot T




Apartment in the RC Neva Towers - Architecture and design by Babayants Architects




Up to 300 lumen
Element of 150 mm

°light tube

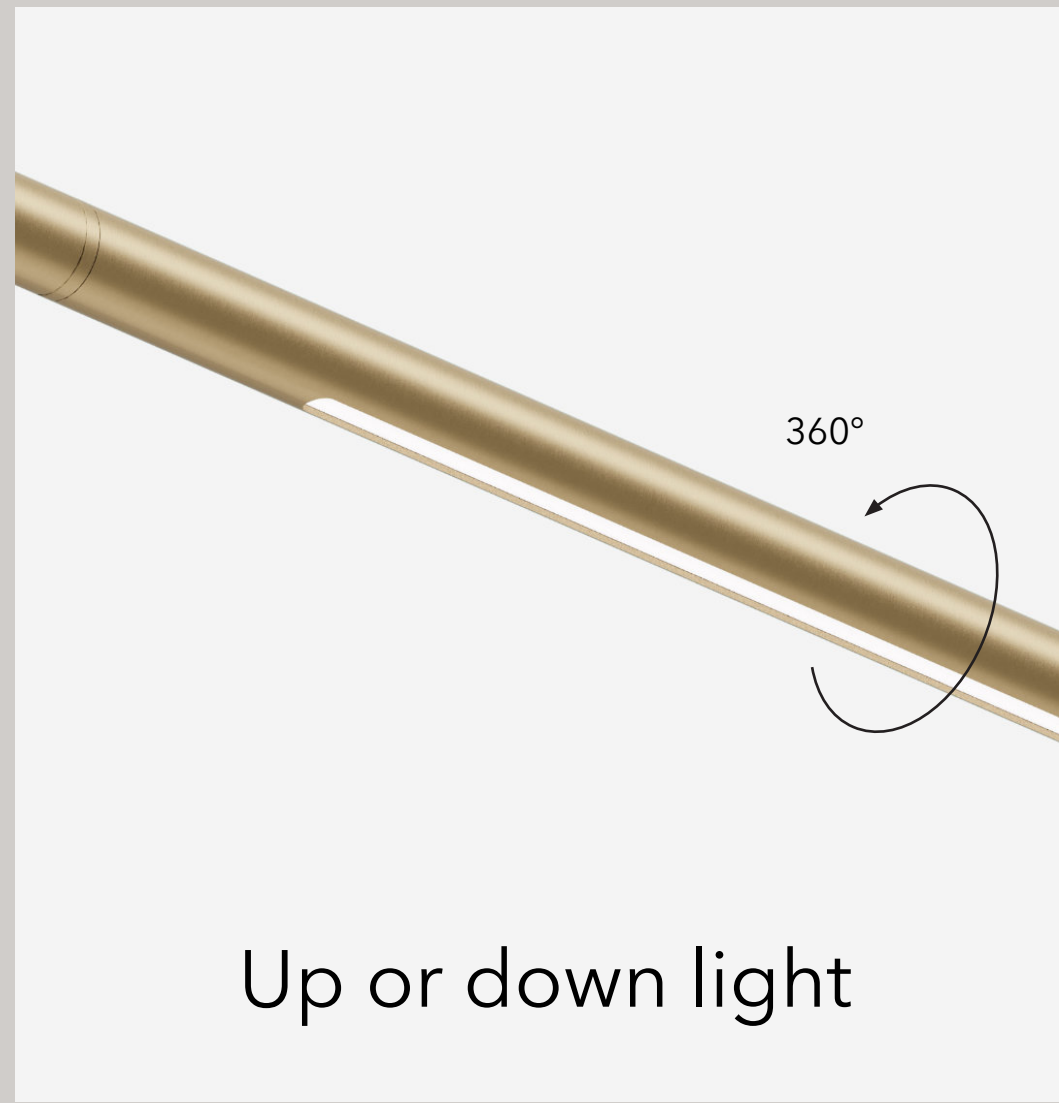

Up to 900 lumen for 900 mm
Lengths: 600, 750 & 900 mm

°light tube spot

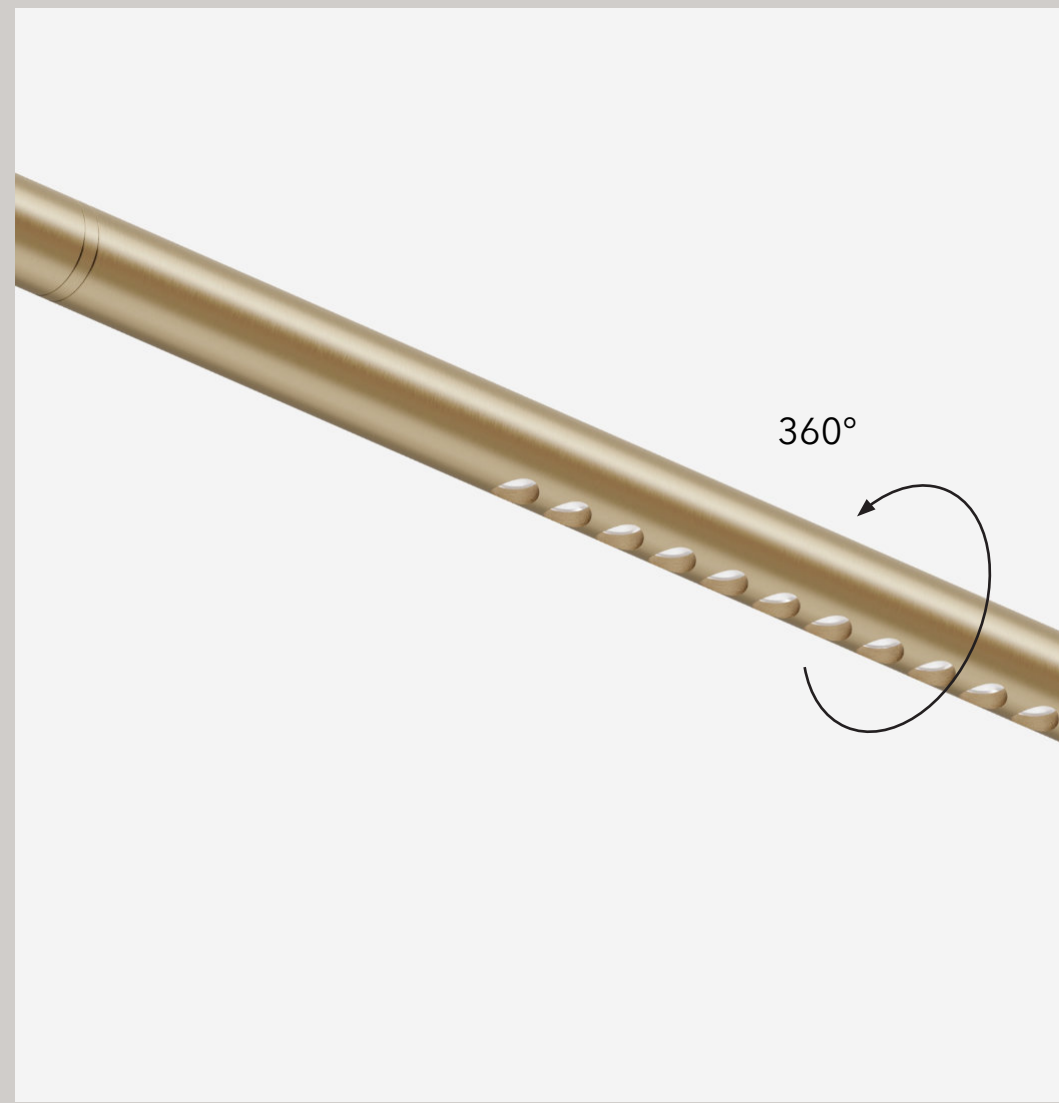


Lengths: 450 mm (450lm) & 750 mm (900lm)



Project Immo Eecke - Interior architect, Frank Sinnaeve - Lighting design, Licht+Vorm - Photo, Bert Vereecke




°exo

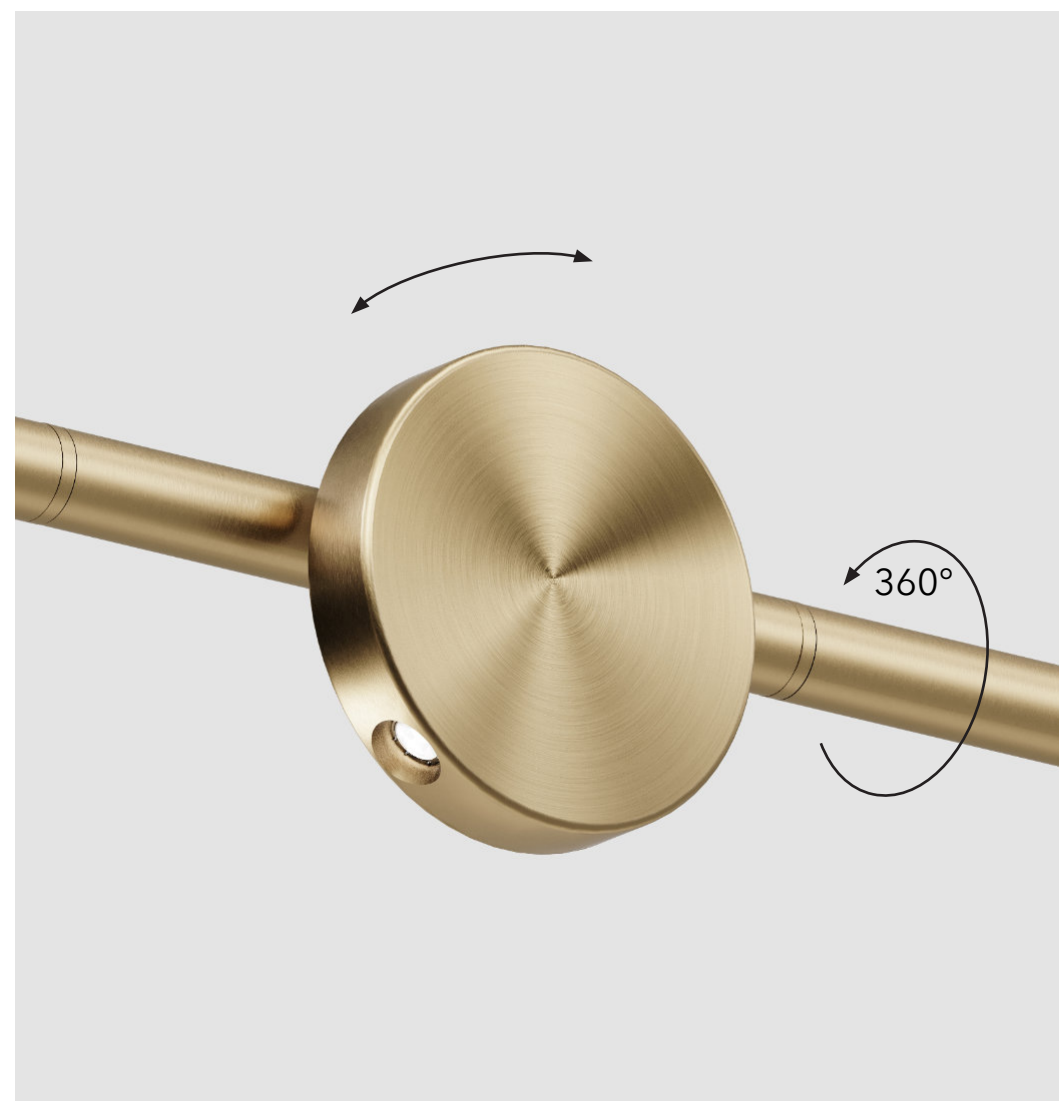


Rotating spot - up to 300 lm
Element of 150 mm
Diameter disk 80 mm

°exo monopoint

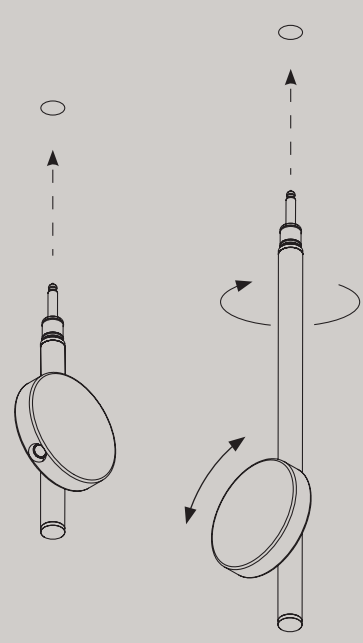

Ceiling

°exo floor

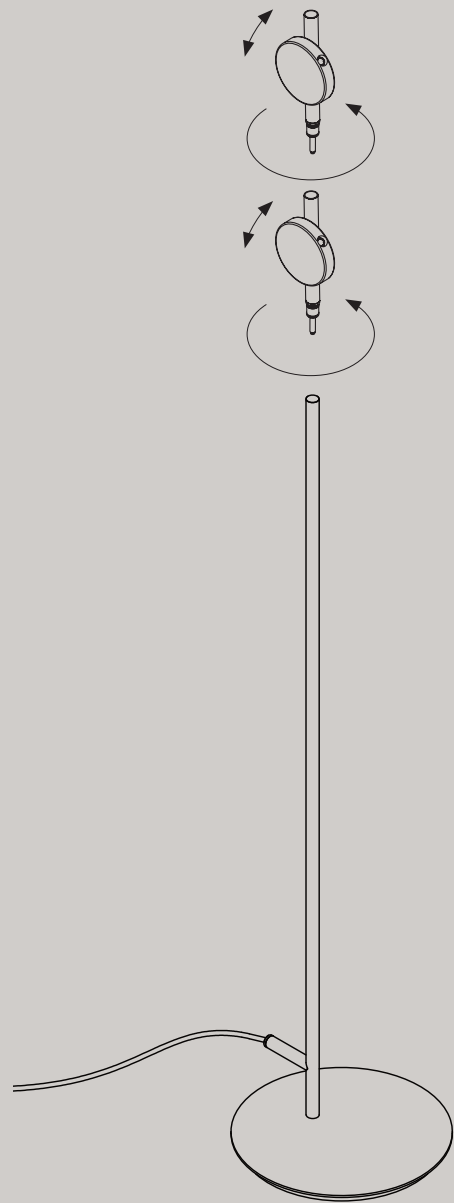

Base with or without light tube and one or two exo's



°drop



With lens or sanded acrylic glass
Up to 300 lumen

°drop



Pendant in a composition

°plug



°spot curve




Up to 200 lumen

Wall mounted



wall & pending configuration (Brewery de Es, Jeuris-Jordens)

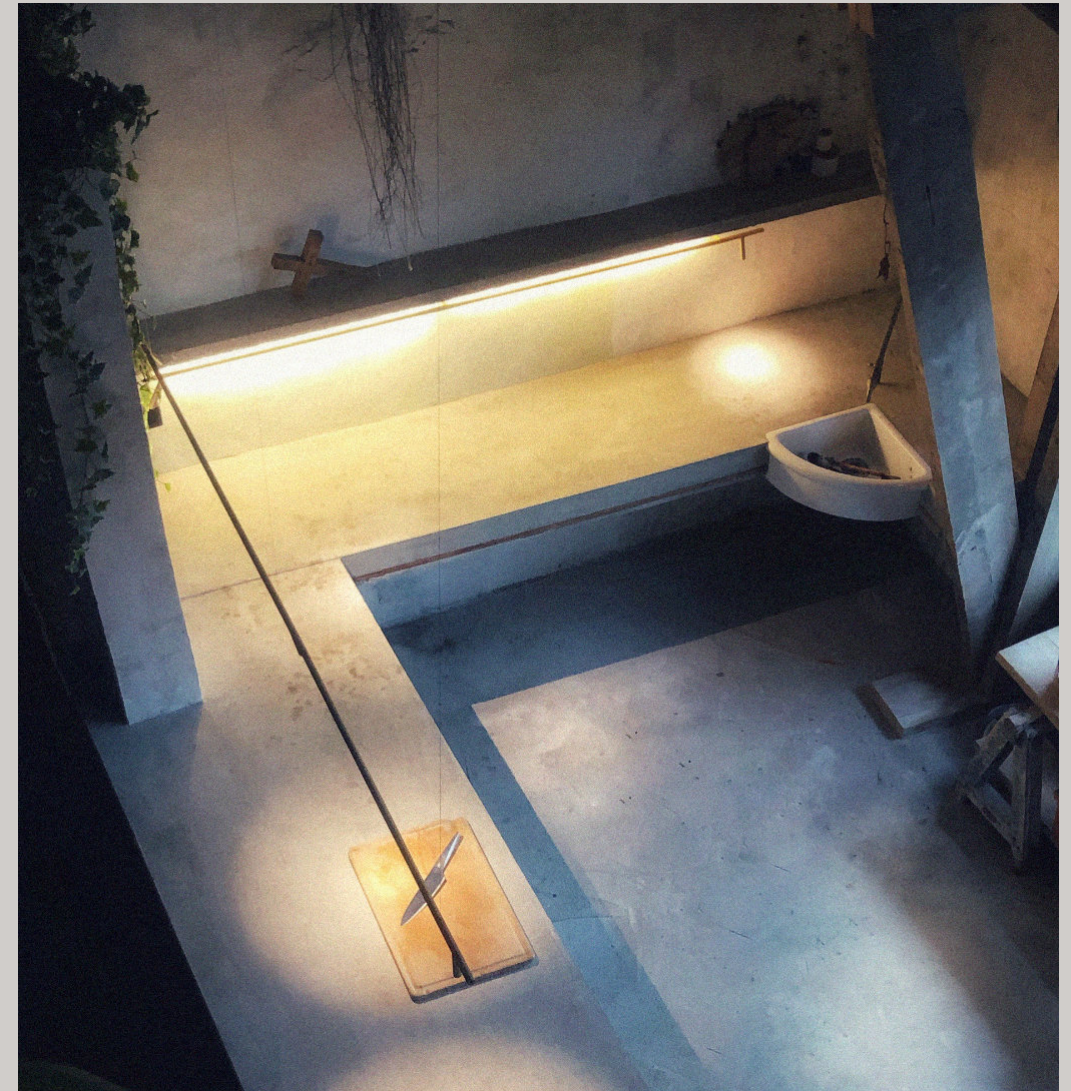



Ceiling mount with long brackets 100mm



U750 curve with spot & light tube - brass finish



°plug






Presentation °plug - Henry van de Velde Award - winner '23






Project Japan - architect Hishida - photograprer Hishida Corp

Bracket for wall or ceiling

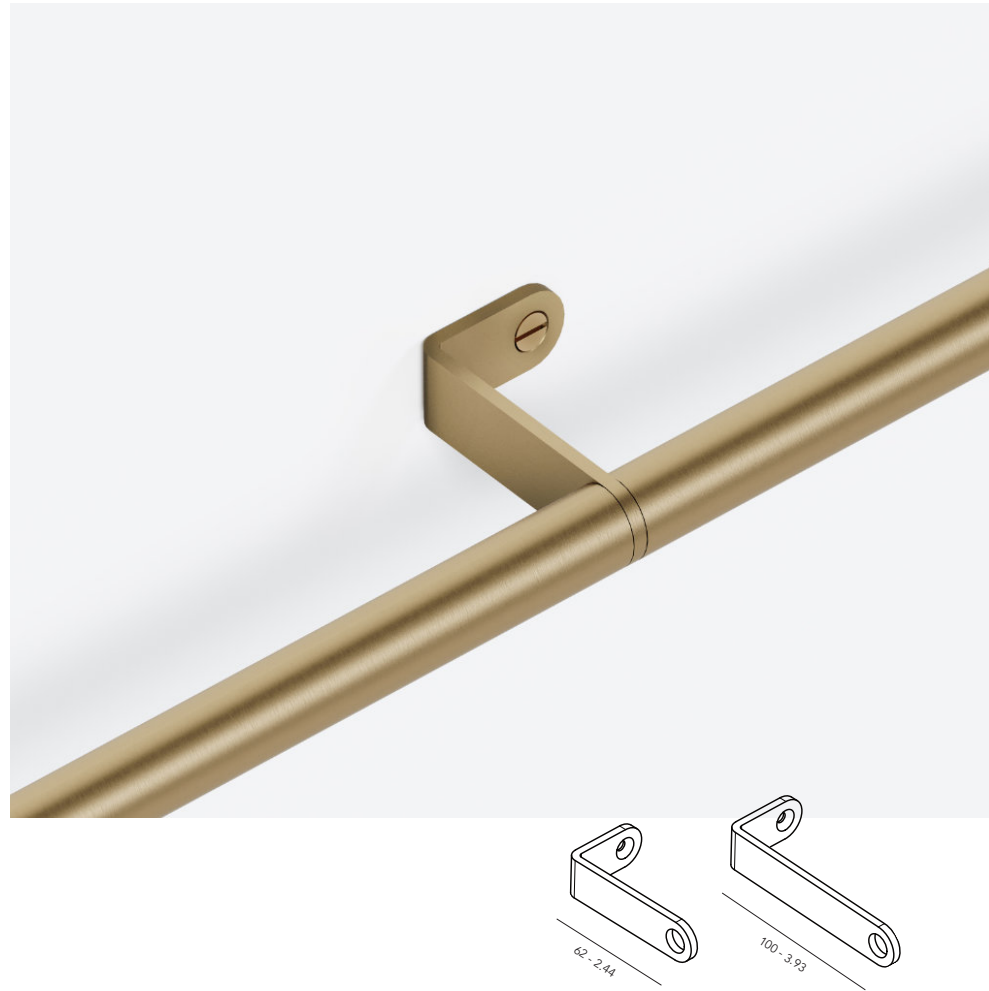


Suspension for Ceiling


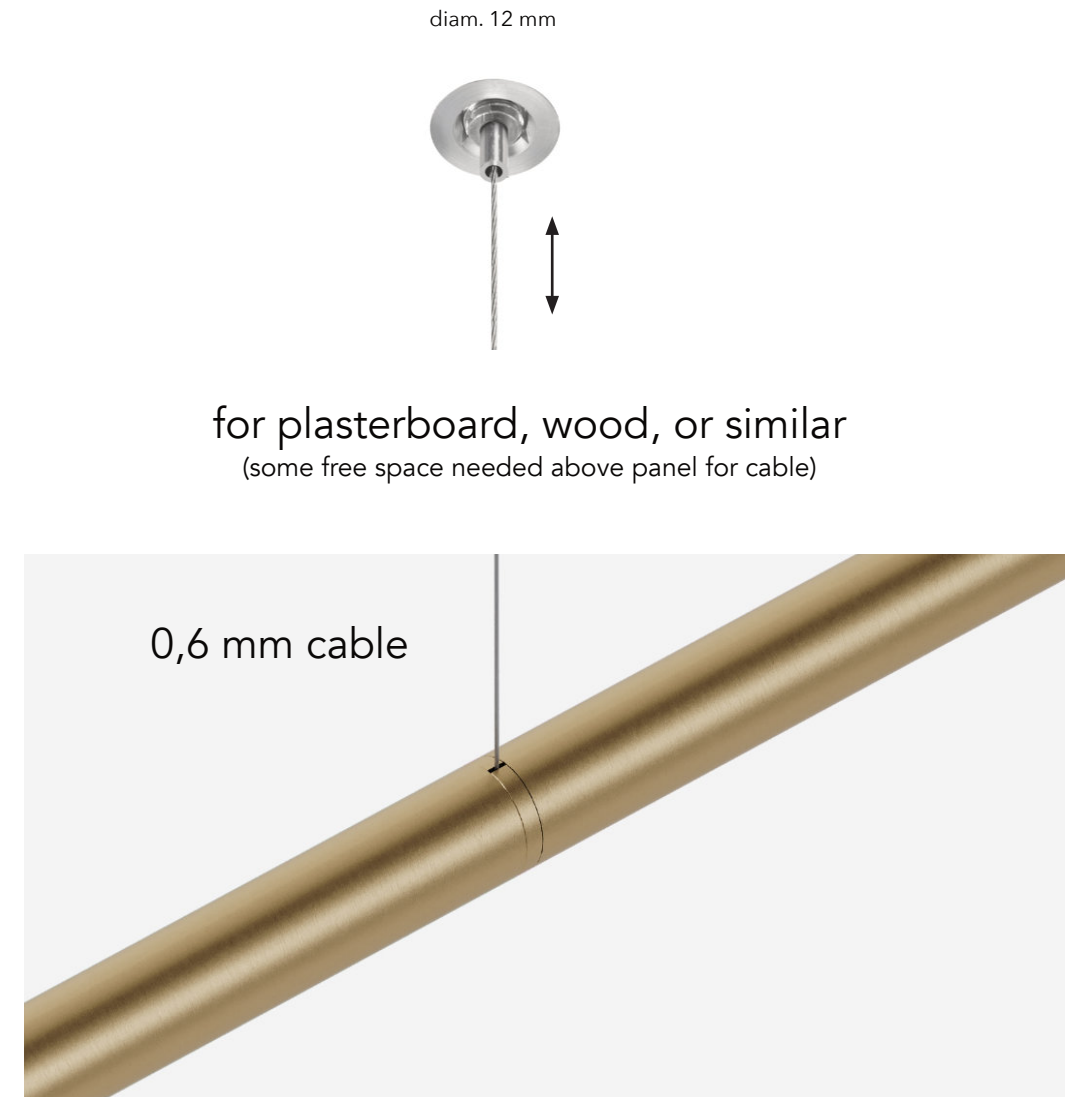






L - configuration (Brewery de Es, Jeuris-Jordens)

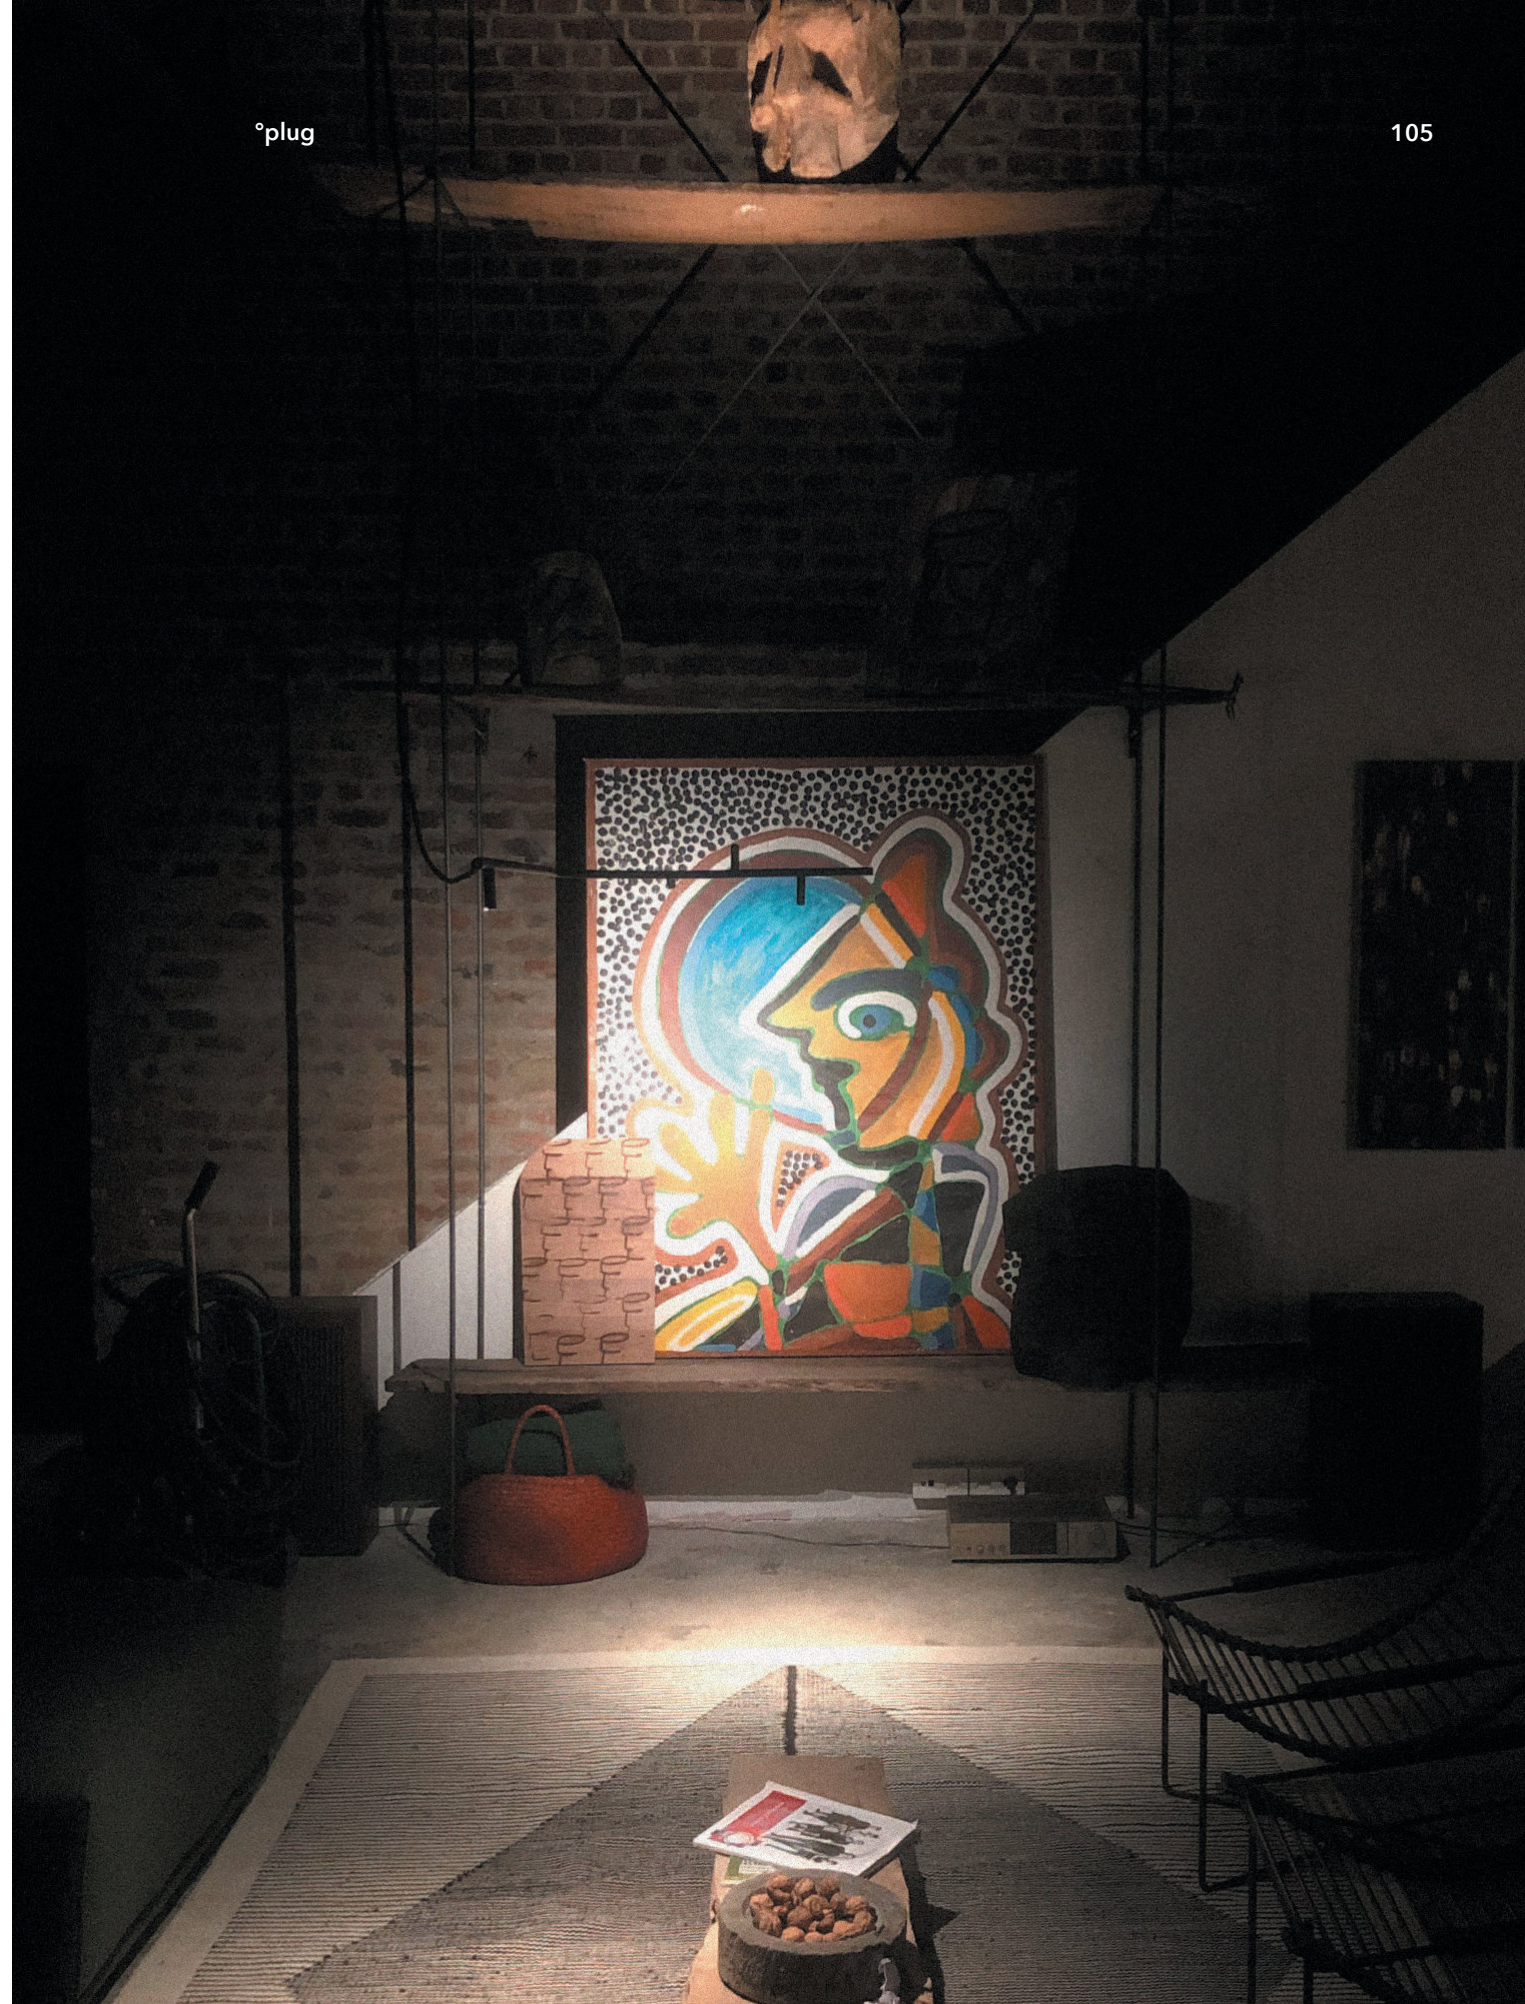


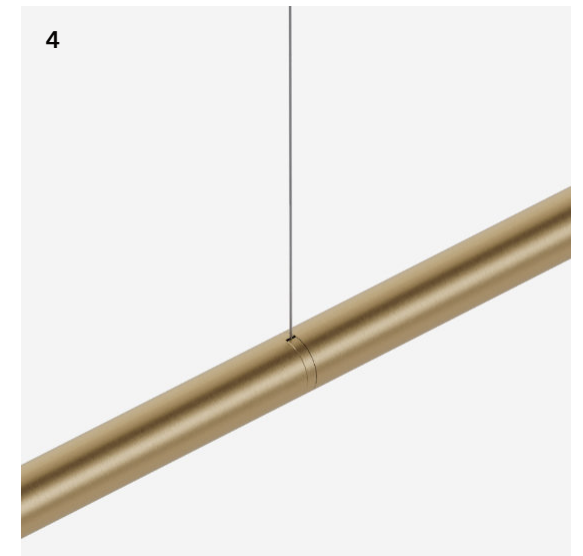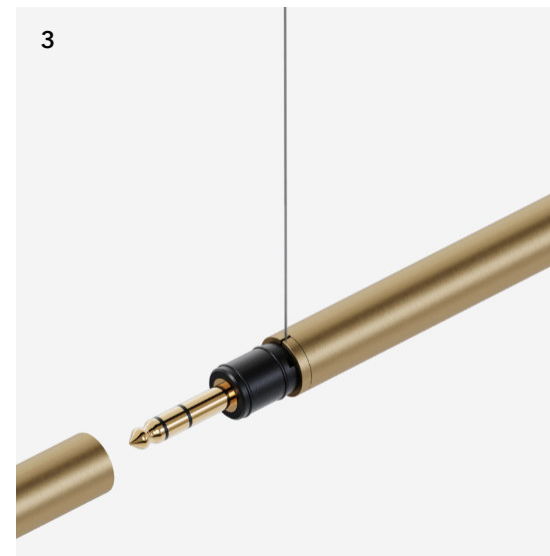

°spot T

materials aluminum
 weight 90 gr / 0,19lb
 voltage 24 Vdc
 wattage 2,2 W or 4W (HO)
 dimming push, dali, 0/1-10V, casambi, phase cut

IP20   

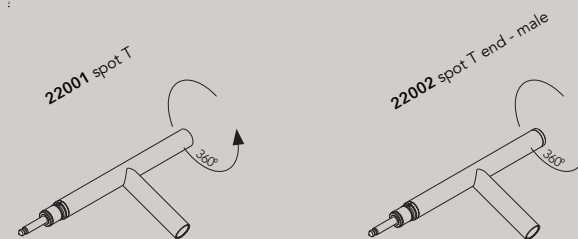

Order Code

22001.AA00.BBBB.CCC.DD spot T
 22002.AA00.BBBB.CCC.DD spot T end - male



22005.AA00.BBBB.CCC.DD spot T - high output
 22006.AA00.BBBB.CCC.DD spot T end - male - high output
 (high output only in 30°, 40° & 60°)

AA 00	Finish	CCC	Optic	Output for 3000K
21	black alu brushed	100	10°	160 lm - 910 cd
22	natural alu brushed	200	20°	130 lm - 730 cd
23	brass alu brushed	300	30°	200 lm - 725 cd (HO)
25	bronze alu brushed	350	35°	130 lm - 335 cd
26	dark bronze alu brushed	400	40°	257 lm - 470 cd (HO)
27	gun metal alu brushed	600	60°	300 lm - 244 cd (HO)
28	nickel alu brushed			
32	copper alu brushed			
03	00 painted custom NCS color			
	01 no power cord			
	02 black power cord			
	04 transparent power cord			
		DD	Mounting	
		00	suspension ring	
		01	bracket 62 mm	
		02	bracket 100 mm	
BBBB	Light			
9527	cri >95, 2700K			
9530	cri >95, 3000K			

°light tube

materials aluminum
weight 250 - 315 - 380 gr
voltage 24 Vdc
wattage 7,2 W - 9,4 W - 11,5 W
dimming push, dali, 0/1-10V, casambi, phase cut

IP20   

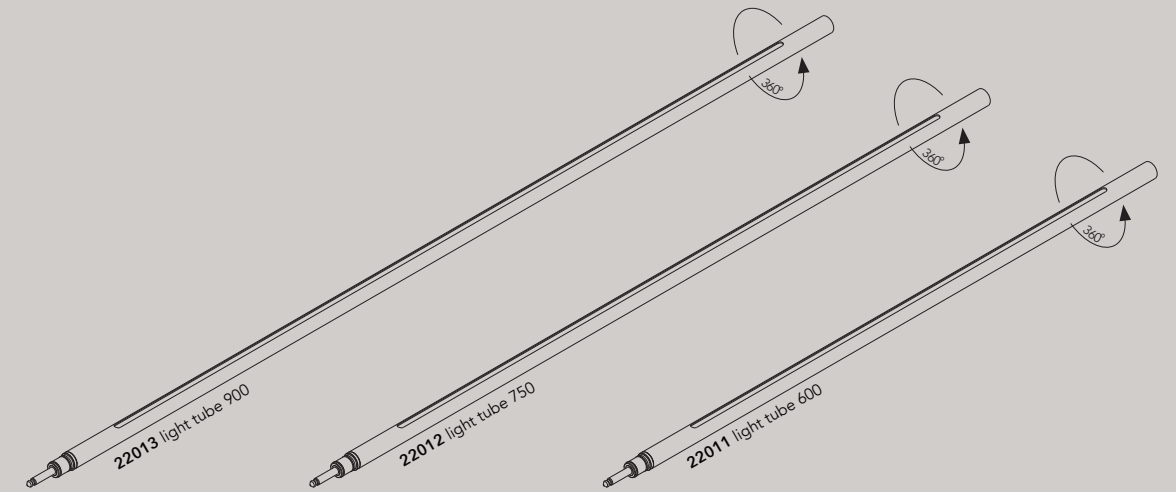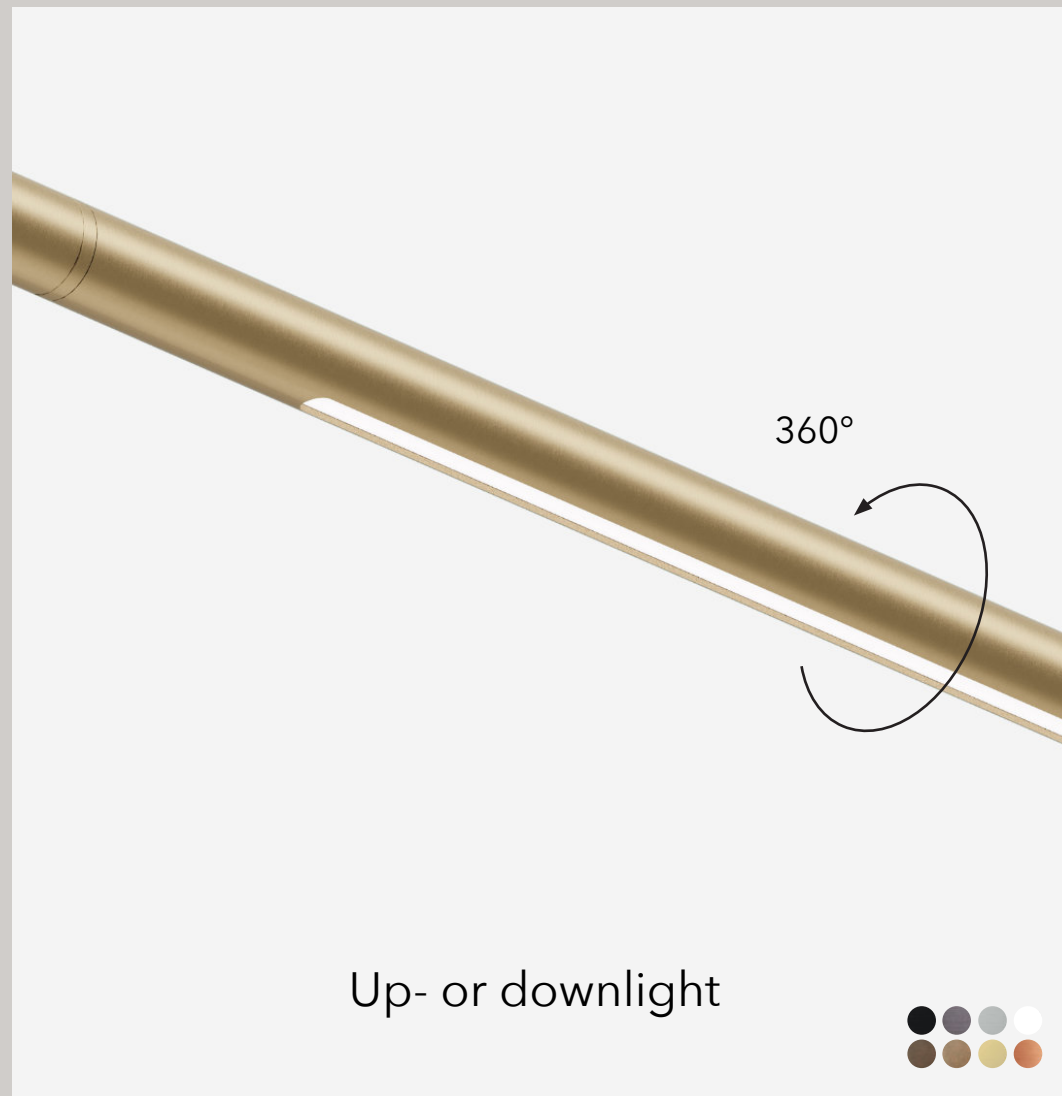

Order Code

22011.AA00.BBBB.CCC.DD light tube 600 (520 lm @3000K)
22012.AA00.BBBB.CCC.DD light tube 750 (680 lm @3000K)
22013.AA00.BBBB.CCC.DD light tube 900 (850 lm @3000K)

AA	Finish
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K


CCC	Diffuser
001	frosted ice opal

DD	Mounting
00	suspension ring
01	bracket 62 mm
02	bracket 100 mm

°light tube spot

materials aluminum
 weight 315 - 380 gr
 voltage 24 Vdc
 wattage 5W - 10W
 dimming push, dali, 0/1-10V, casambi

IP20  CE ENEC

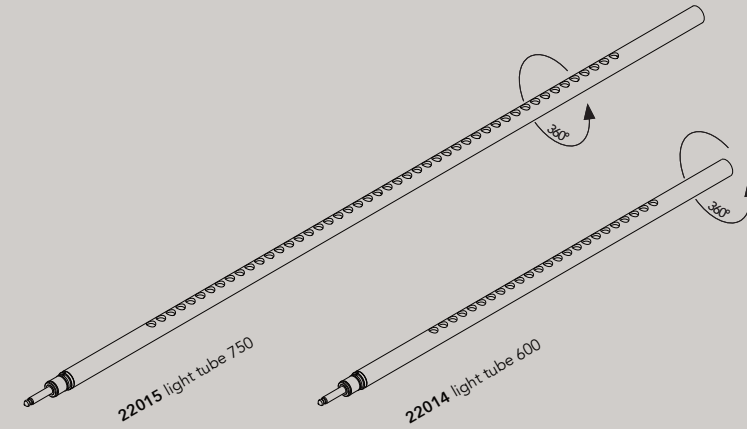

Order Code

22014.AA00.BBBB.CCC.DD spot tube 450

22015.AA00.BBBB.CCC.DD spot tube 750

- | | |
|-----------|---------------------------|
| AA | Finish |
| 21 | black alu brushed |
| 22 | natural alu brushed |
| 23 | brass alu brushed |
| 25 | bronze alu brushed |
| 26 | dark bronze alu brushed |
| 27 | gun metal alu brushed |
| 28 | nickel alu brushed |
| 32 | copper alu brushed |
| 03 | painting custom NCS color |

- | | |
|-------------|----------------|
| BBBB | Light |
| 9527 | cri >95, 2700K |
| 9530 | cri >95, 3000K |


- | | |
|------------|------------------|
| CCC | Diffuser |
| 001 | frosted ice opal |

- | | |
|-----------|-----------------|
| DD | Mounting |
| 00 | suspension ring |
| 01 | bracket 62 mm |
| 02 | bracket 100 mm |

°floor

materials aluminum, steel
weight 4kg
voltage 240 Vac
wattage 11,5 W
dimming floor dimmer

IP20  CE ENEC

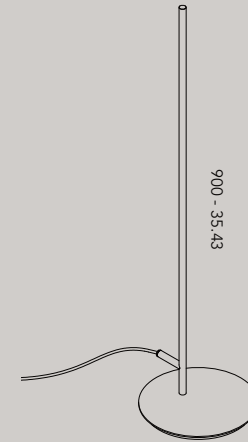

Order Code

22400.AA00.BBBB.CCC.DD stand lighttube
22401.AA00.BBBB.CCC.DD stand (without light)

AA Finish
21 black alu brushed
22 natural alu brushed
23 brass alu brushed
25 bronze alu brushed
26 dark bronze alu brushed
27 gun metal alu brushed
28 nickel alu brushed
32 copper alu brushed
03 painted custom NCS color



BBBB Light
9527 cri >95, 2700K
9530 cri >95, 3000K

CCC Diffuser
001 frosted ice opal

exo mono

materials aluminum
 weight 200 gr / 0.44lb - 230 gr / 0.50lb
 voltage 24 Vdc
 wattage 4 W
 dimming push, dali, 0/1-10V, casambi, phase cut

IP20  CE ENEC

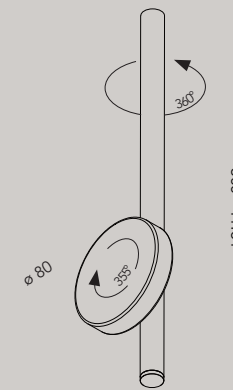

Order Code

22034.AA00.BBBB.CCC exo monopoint 150
 22035.AA00.BBBB.CCC exo monopoint 300

AA	Finish
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color



BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K

CCC	Diffuser
300	30° 130 lm - 725 cd (HO)
400	40° 257 lm - 470 cd (HO)
600	60° 300 lm - 244 cd (HO)

Accessories

22250 plaster kit

22251 ceiling rose





45 - 0.14
 ø 40 - 0.13

° drop

materials aluminum
 weight 120 gr / 0,26lb
 voltage 24 Vdc
 wattage 4 W
 dimming push, dali, 0/1-10V, casambi, phase cut

IP20   

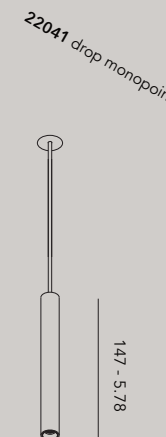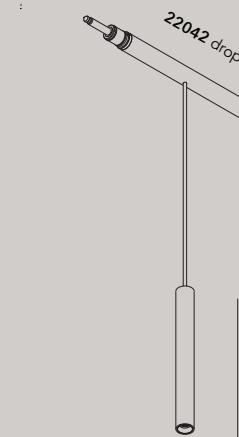

Order Code

22041.AA.BBBB.CCC.DD drop monopoint
 22042.AA.BBBB.CCC.DD drop

AA Finish tube
 21 black alu brushed
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 32 copper alu brushed
 03 painted custom NCS color


BBBB Light
 9527 cri >95, 2700K
 9530 cri >95, 3000K

CCC	Optic	Output for 3000K
300	30°	130 lm - 725 cd (HO)
400	40°	257 lm - 470 cd (HO)
600	60°	300 lm - 244 cd (HO)


DD Mounting
 00 suspension ring
 01 bracket 62 mm
 02 bracket 100 mm

Accessories

22250 plaster kit



22251 ceiling rose



ø 40 - 1.75

45 - 1.77

° drop opal

materials aluminum
 weight 120 gr / 0,26lb
 voltage 24 Vdc
 wattage 2,2 W
 dimming push, dali, 0/1-10V, casambi, phase cut


IP20  CE ENEC



22043



22044

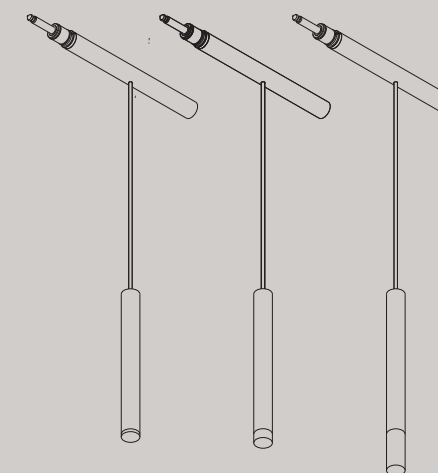

Order Code

22043.AA.BBBB.CCC drop monopoint opal
 22044.AA.BBBB.CCC.DD drop opal

AA Finish tube
 21 black alu brushed
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 32 copper alu brushed
 03 painted custom NCS color


BBBB Light
 9527 cri >95, 2700K
 9530 cri >95, 3000K

CCC Optic
 005 opal 5 mm
 010 opal 10 mm
 035 opal 35 mm


DD Mounting
 00 suspension ring
 01 bracket 62 mm
 02 bracket 100 mm

Accessories

22250 plaster kit



22251 ceiling rose




ø 40 - 1.75

45 - 1.77


°spot curve

materials aluminum
 weight 100 gr / 0.22lb
 voltage 24 Vdc
 wattage 2,2 W or 4W (HO)
 dimming push, dali, 0/1-10V, casambi, phase cut

IP20  CE ENEC



22021 spot curve - male



22022 spot curve - female

Order Code

22021.AA00.BBBB.CCC.DD spot curve - male
 22022.AA00.BBBB.CCC.DD spot curve - female

AA	Finish
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color


BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K

CCC	Optic	Output for 3000K
100	10°	160 lm - 910 cd
200	20°	130 lm - 730 cd
300	30°	200 lm - 725 cd (HO)
350	35°	130 lm - 335 cd
400	40°	257 lm - 470 cd (HO)
600	60°	300 lm - 244 cd (HO)


DD	Mounting
00	suspension ring
01	bracket 62 mm
02	bracket 100 mm

Accessories

22250 plaster kit



22251 ceiling rose




ø 40 - 1.75

45 - 1.77

inter tube

interrupt tube

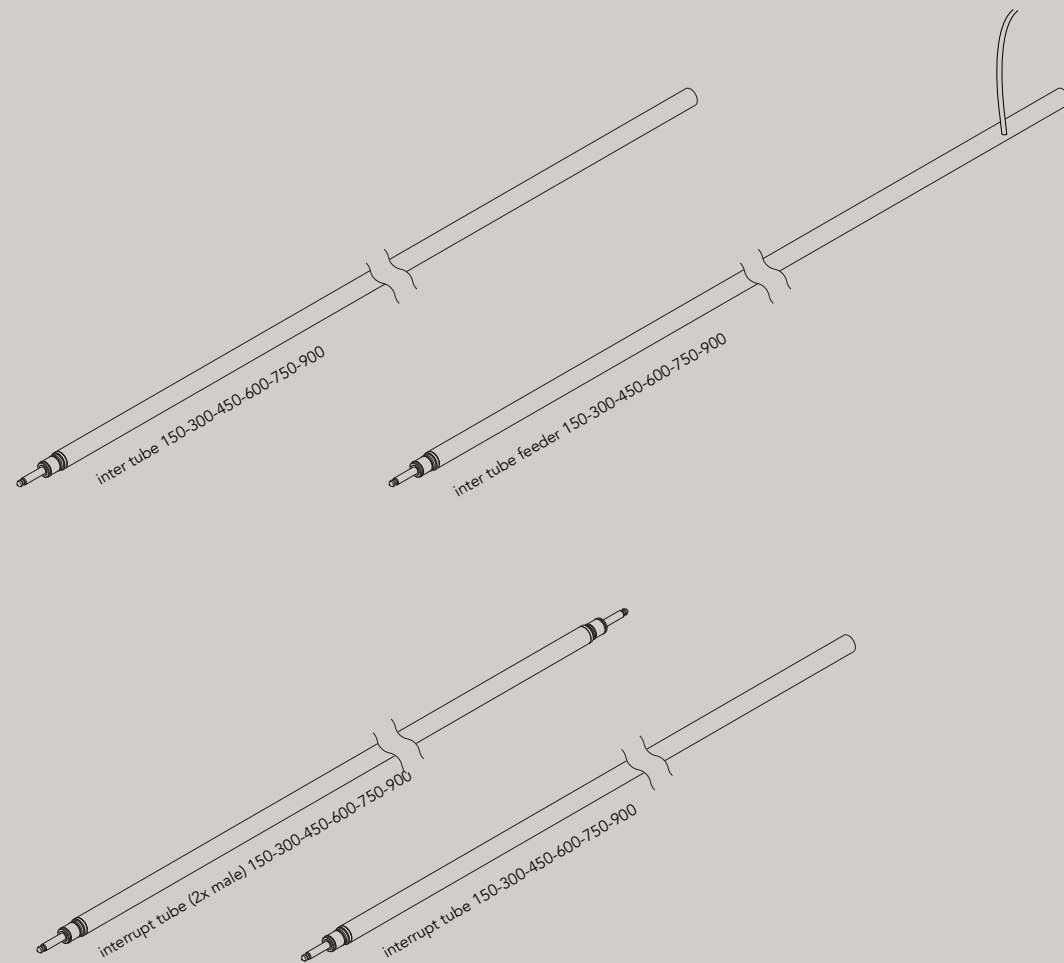

interrupt tube

There is no power transmission in this element.
Only in case multiple circuits are needed in a contiguous configuration.
Quantity and location defined by Eden Design.

Order Code

22131.AA00.DD inter tube 150
22101.AA00.DD inter tube 300
22102.AA00.DD inter tube 450
22103.AA00.DD inter tube 600
22104.AA00.DD inter tube 750
22105.AA00.DD inter tube 900
22106.AA00.DD inter tube custom length

22132.AA00.DD inter tube 150 feeder with cable 2m
22107.AA00.DD inter tube 300 feeder with cable 2m
22108.AA00.DD inter tube 450 feeder with cable 2m
22109.AA00.DD inter tube 600 feeder with cable 2m
22110.AA00.DD inter tube 750 feeder with cable 2m
22111.AA00.DD inter tube 900 feeder with cable 2m
22112.AA00.DD inter tube custom length feeder with cable 2m

22133.AA00.DD inter tube 150 feeder with cable 6m
22113.AA00.DD inter tube 300 feeder with cable 6m
22114.AA00.DD inter tube 450 feeder with cable 6m
22115.AA00.DD inter tube 600 feeder with cable 6m
22116.AA00.DD inter tube 750 feeder with cable 6m
22117.AA00.DD inter tube 900 feeder with cable 6m
22118.AA00.DD inter tube custom length feeder with cable 6m

AA 00 Finish

21 black alu brushed
22 natural alu brushed
23 brass alu brushed
25 bronze alu brushed
26 dark bronze alu brushed
27 gun metal alu brushed
28 nickel alu brushed
32 copper alu brushed
03 painted custom NCS color
00 no power cord
01 black power cord
04 transparent power cord


DD Mounting

00 suspension ring
01 bracket 62 mm
02 bracket 100 mm


22134.AA00.DD interrupt tube 150
22119.AA00.DD interrupt tube 300
22120.AA00.DD interrupt tube 450
22121.AA00.DD interrupt tube 600
22122.AA00.DD interrupt tube 750
22123.AA00.DD interrupt tube 900
22124.AA00.DD interrupt tube custom length

22135.AA00.DD interrupt tube 150 - 2x male
22125.AA00.DD interrupt tube 300 - 2x male
22126.AA00.DD interrupt tube 450 - 2x male
22127.AA00.DD interrupt tube 600 - 2x male
22128.AA00.DD interrupt tube 750 - 2x male
22129.AA00.DD interrupt tube 900 - 2x male
22130.AA00.DD interrupt tube custom length - 2x male


° cross & T




22210 cross joint




22221 T joint - male




22222 T joint - female




22211 cross end - female + male



22212 / 22213 cross end feeder



22214 cross end - 2x male



22215 cross end - 2x female

Order Code

22210.AA cross joint

22211.AA00 cross end - female + male

22212.AA00 cross end feeder - 2x female with cable 2m

22213.AA00 cross end feeder - 2x female with cable 6m

22214.AA00 cross end - 2x male

22215.AA00 cross end - 2x female

22221.AA00 T joint - male

22222.AA00 T joint - female


22223.AA00.DD T joint feeder - male + female with cable 2m

22224.AA00.DD T joint feeder - male + female with cable 6m


AA 00 Finish

- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color
- 00 no power cord
- 01 black power cord
- 04 transparent power cord

° plug end




22201 end - male




22202 end - female




22219 end - male (100mm)



22203 / 22204 end - feeder female



22218 / 22220 end feeder - female

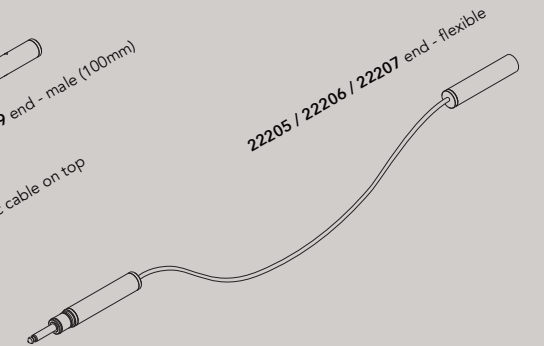

22218 / 22220 end feeder - female - electric cable on top

22205 / 22206 / 22207 end - flexible

Order Code

22201.AA00.DD end - male

22219.AA00.DD end - male (100mm)

22202.AA00.DD end - female

22203.AA00.DD end feeder - female with cable 2m

22204.AA00.DD end feeder - female with cable 6m

22205.AA00.DD end - flexible 50cm

22206.AA00.DD end - flexible 100cm

22207.AA00.DD end - flexible custom length

22218.AA00.DD end top feeder 100mm – female with 2m cable (100mm)


22220.AA00.DD end top feeder 100mm – female with 6m cable (100mm)

AA 00 Finish

- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color
- 00 no power cord
- 01 black power cord
- 04 transparent power cord

DD Mounting

- 00 suspension ring
- 01 bracket 62 mm
- 02 bracket 100 mm




22311 curve 225 - male/female



22312 curve 225 - 2x male



22313 curve 225 - 2x female

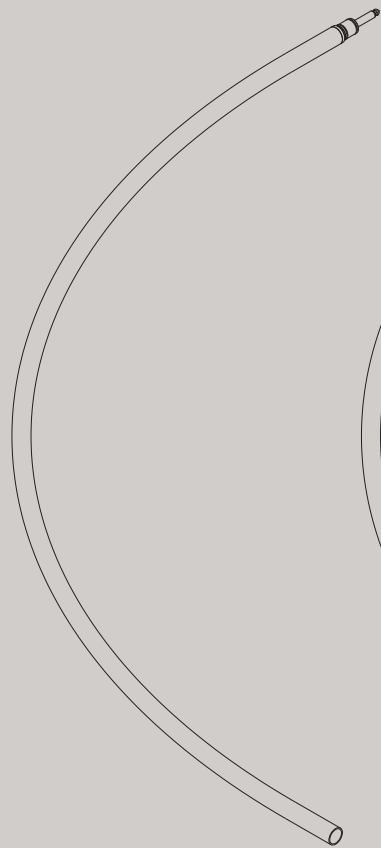


22321 curve 825 - male/female



22322 curve 825 - 2x male



22323 curve 825 - 2x female

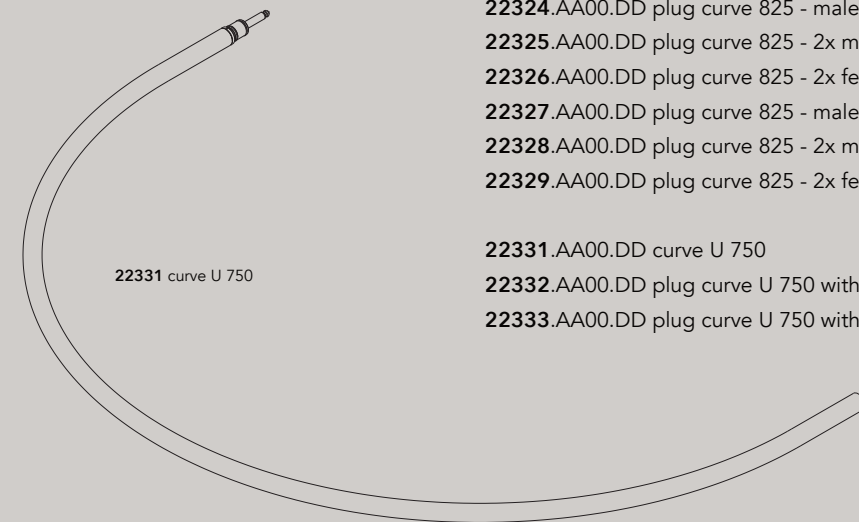

22331 curve U 750

Order Code

22311.AA00.DD curve 225 - male/female

22312.AA00.DD curve 225 - 2x male

22313.AA00.DD curve 225 - 2x female

22314.AA00.DD plug curve 225 - male/female with cable 2m

22315.AA00.DD plug curve 225 - 2x male with cable 2m

22316.AA00.DD plug curve 225 - 2x female with cable 2m

22317.AA00.DD plug curve 225 - male/female with cable 6m

22318.AA00.DD plug curve 225 - 2x male with cable 6m

22319.AA00.DD plug curve 225 - 2x female with cable 6m

22321.AA00.DD curve 825 - male/female

22322.AA00.DD curve 825 - 2x male

22323.AA00.DD curve 825 - 2x female

22324.AA00.DD plug curve 825 - male/female with cable 2m

22325.AA00.DD plug curve 825 - 2x male with cable 2m

22326.AA00.DD plug curve 825 - 2x female with cable 2m

22327.AA00.DD plug curve 825 - male/female with cable 6m

22328.AA00.DD plug curve 825 - 2x male with cable 6m

22329.AA00.DD plug curve 825 - 2x female with cable 6m

22331.AA00.DD curve U 750

22332.AA00.DD plug curve U 750 with cable 2m

22333.AA00.DD plug curve U 750 with cable 6m

AA 00 Finish

- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color
- 00 no power cord
- 01 black power cord
- 04 transparent power cord


DD

- 00 suspension ring
- 01 bracket 62 mm
- 02 bracket 100 mm

°bracket

Order Code

See DD in order code element

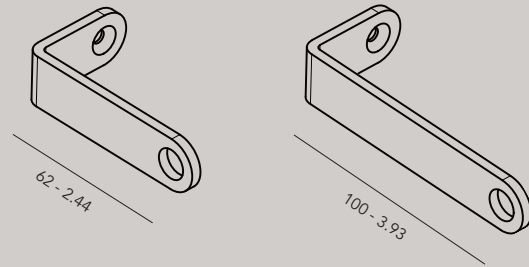

Quantity of brackets depends on the custom configuration.
Eden Design defines the quantity needed. In general every one or two joints, a bracket is needed.


°suspension

22242 suspension set surface mount 2m

22243 suspension set surface mount 6m

22244 suspension set recessed 2m


22245 suspension set recessed 6m

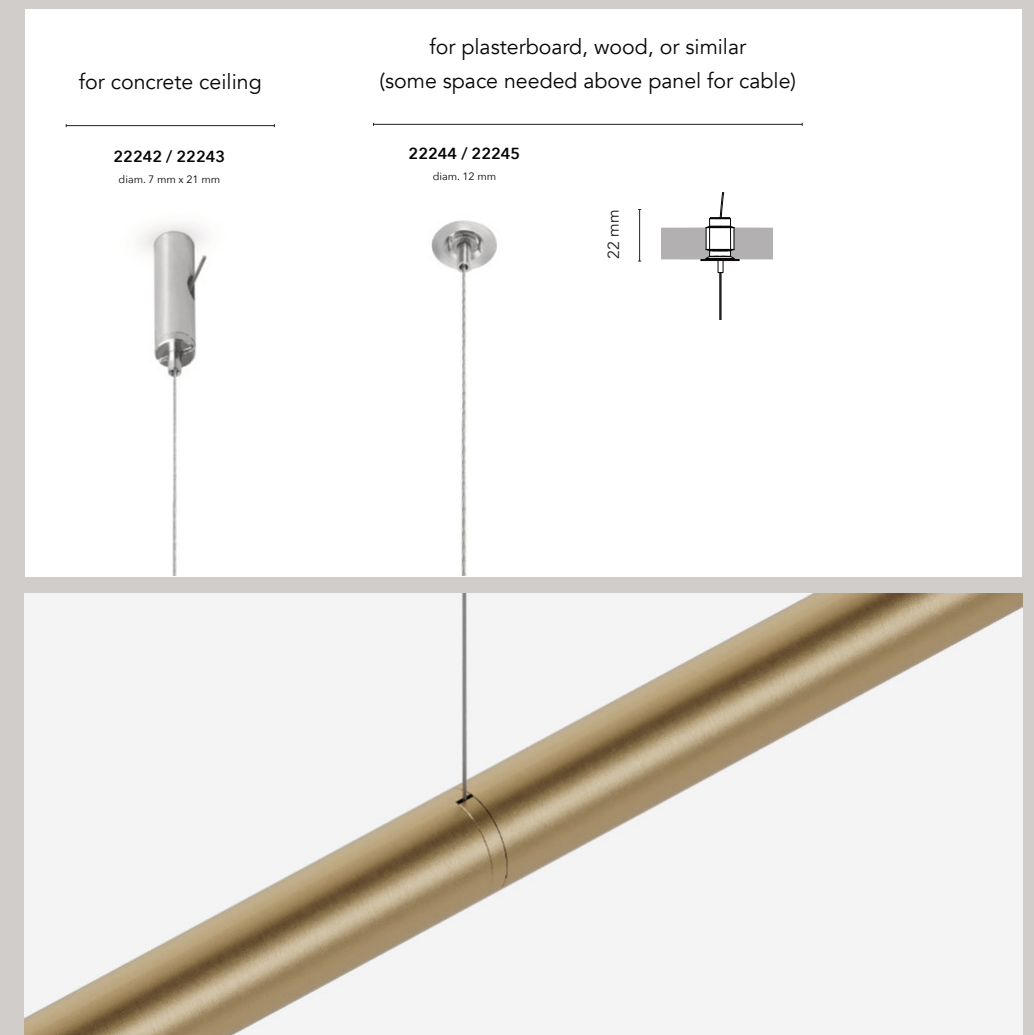

Quantity of suspensions depends on the custom configuration.
Eden Design defines the quantity needed. In general every one or two joints, a suspension is needed.

° plasterkit

22250 plasterkit wall or ceiling for plug - female feeder



24V power supplies & controls

Power supplies




- 90151.0000 Power supply, 24VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90152.0000 Power supply, 24VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90153.0000 Power supply, 24VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90154.0000 Power supply, 24VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90155.0000 Power supply, 24VDC, 320W - 90-305 VAC/50-60Hz - CE - cUL certified


- 90160.0000 Power supply, 24VDC, 060W - 120-240VAC/50-60Hz - CE - cUL listed - slim size type VLM
- 90161.0000 Power supply, 24VDC, 096W - 120-240VAC/50-60Hz - CE - cUL listed - slim size type VLM

- 90141.0000 Power supply, 24VDC pwm, 80W, phase cut - 220-240VAC CE certified
- 90143.0000 Power supply, 24VDC pwm, 200W, phase cut - 220-240VAC CE certified

Ceiling box



90162.0000
(435x33x42 mm)



90163.0000
(435x33x60 mm)

- 90162.0100 Ceiling box with power supply, 24VDC, 96W - 120-240VAC/50-60Hz CE / cUL Listed - black
- 90162.0200 Ceiling box with power supply, 24VDC, 96W - 120-240VAC/50-60Hz CE / cUL Listed - white
- 90163.0100 Ceiling box with power supply, 24VDC, 96W - 120-240VAC/50-60Hz CE / cUL Listed - black
- 90163.0200 Ceiling box with power supply, 24VDC, 96W - 120-240VAC/50-60Hz CE / cUL Listed - white

Dimming modules




- 90032.0000 Dimmodule 24V pwm, 240W control by DALI, 0/1-10V, push (only with ceiling box 90163)
- 90033.0000 Dimmodule 24V pwm, 240W control by casambi (only with ceiling box 90163)

max. 60W, 10 connections or 10m length per feeder


°micr'online

The new 48V low voltage family of tracks was born out of necessity to miniaturize. Still holding the DNA of our traditional °online system but with new round edges for a soft and trendy look.

The °micr'online range offers different track profiles and luminaires to obtain the maximum flexibility in lighting projects. All the tracks have the same "smart core" with integrated databus for light control. Dali and Casambi for wireless control allow every luminaire to be controlled individually.

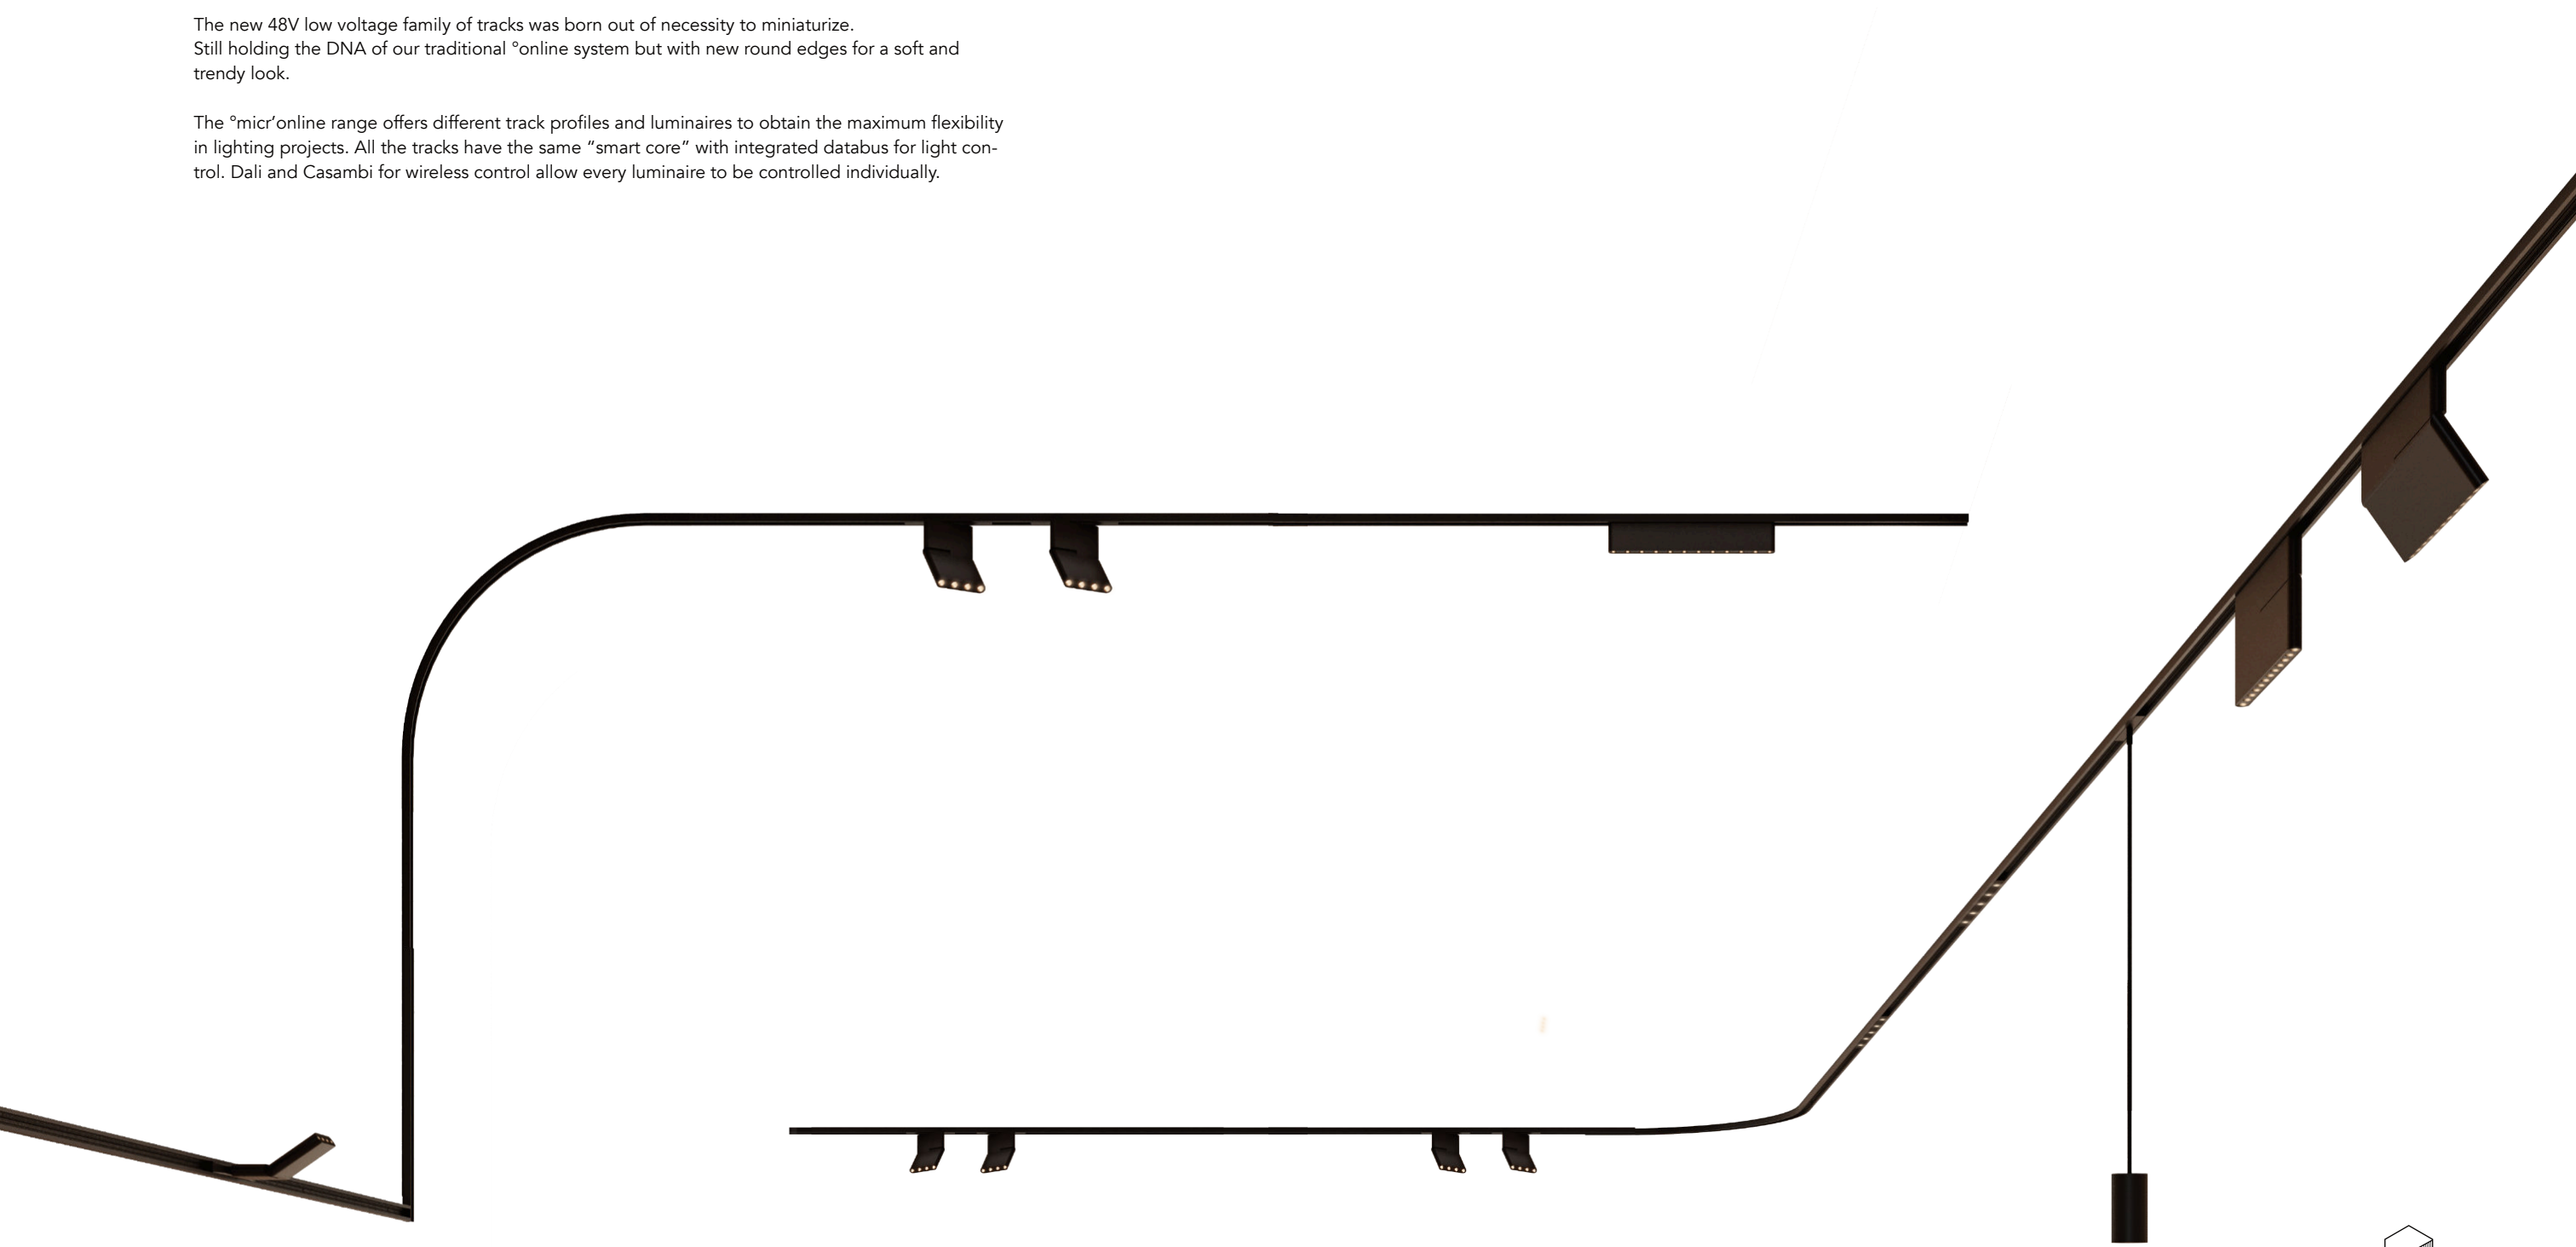

Miniaturised Soft Round Edges

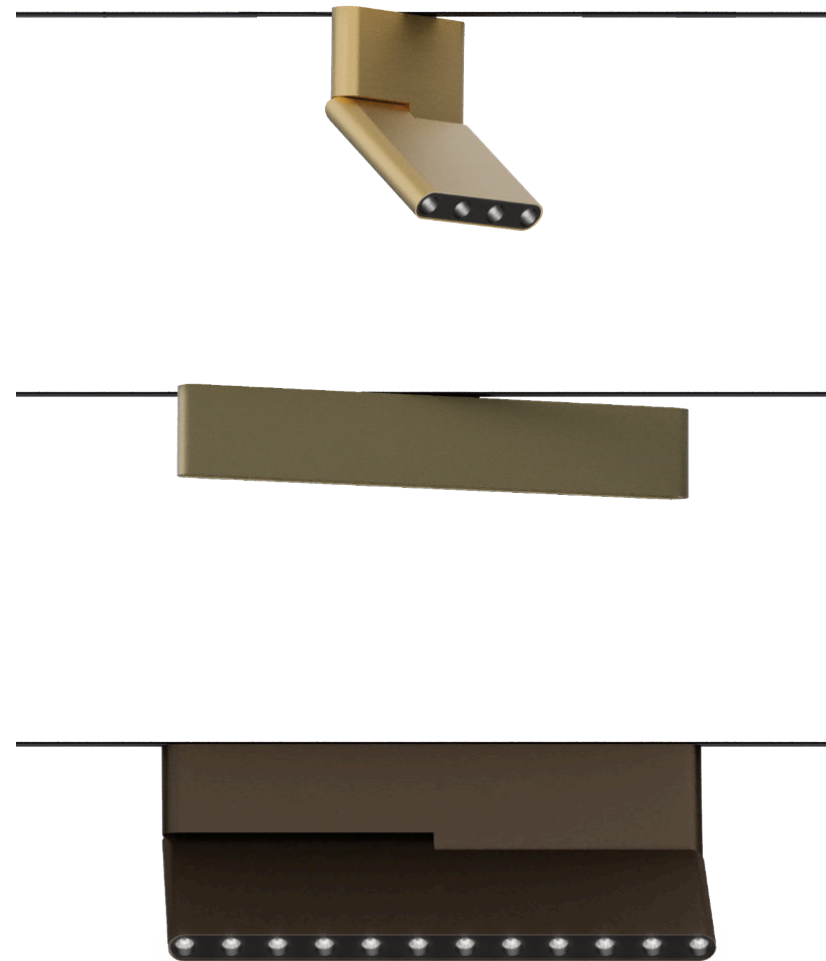

Thin Size
13mm

Powerful Light

Finishes










°turn micro

Surface track M1

Very small track
Easy to mount on the ceiling
Minimal visual impact
Round corners both vertically and horizontally

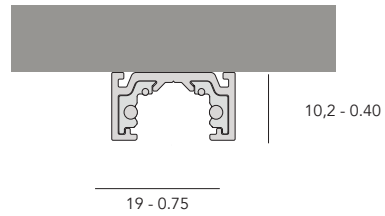


Recessed track M5

Low & compact profile.

Excellent application for concrete ceilings that are plastered. The thickness of standard plasterwork is enough to recess the M5 track.

Can also be used with plasterboard ceilings.

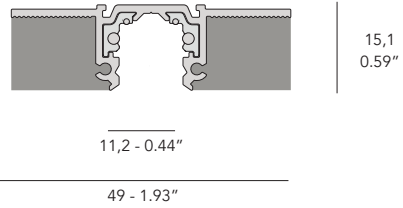

°micr'online

147



Surface track M1

New features

The **round end cap** closes the track with a smooth, cylindrical form that feels intentional and complete. It is a small detail, but one that shifts the character of the entire installation.

Available in **Eden Design metal color finishes** or any other **NCS color**.







°line.m1

material aluminum
 voltage 48Vdc
 circuits 1 circuit 10A + 1A databus
 dimming DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa

IP20   

Order Code

30001.AA00.BBBB line.m1

30030.AA00 line.m1 round corner 90° radius 300 mm

30031.AA00 line.m1 round corner 'wall to ceiling' 90° radius 300 mm

30050.AA00 line.m1 round corner 90° radius 500 mm

AA	Finish	BBBB	Length
01	black	1000	1000 mm
02	white	2000	2000 mm
22	natural alu brushed	3000	3000 mm
23	brass alu brushed	xxxx	xxxx mm (custom length)
25	bronze alu brushed		
26	dark bronze alu brushed		
27	gun metal alu brushed		
28	nickel alu brushed		
32	copper alu brushed		
03	painting custom NCS color		

Track Accessories

30201.AA00 endcap for m1

30202.AA00 round endcap for m1

30220.0100 electrical end feeder for m1 black

30220.0200 electrical end feeder for m1 white

30221.0100 electrical feeder for m1, m5, m6 black

30221.0200 electrical feeder for m1, m5, m6 white

30230.0100 electrical jointing connector 180° black

30230.0200 electrical jointing connector 180° white

30231.0100 electrical jointing connector L 90° black

30231.0200 electrical jointing connector L 90° white

30232.0100 electrical jointing wall connector L 90° (+/- 10°) black

30232.0200 electrical jointing wall connector L 90° (+/- 10°) white

30233.0100 electrical jointing connector adjustable corner black

30233.0200 electrical jointing connector adjustable corner white

30251.0100 horizontal mechanical corner joint cover for m1 black

30251.0200 horizontal mechanical corner joint cover for m1 white

30252.0100 vertical mechanical corner joint cover for m1 black

30252.0200 vertical mechanical corner joint cover for m1 white

30261.0100 cover profile 1000mm for m1 black


30261.0200 cover profile 1000mm for m1 white

30262.0100 cover profile 2000mm for m1 black

30262.0200 cover profile 2000mm for m1 white

30263.0100 cover profile 3000mm for m1 black

30263.0200 cover profile 3000mm for m1 white

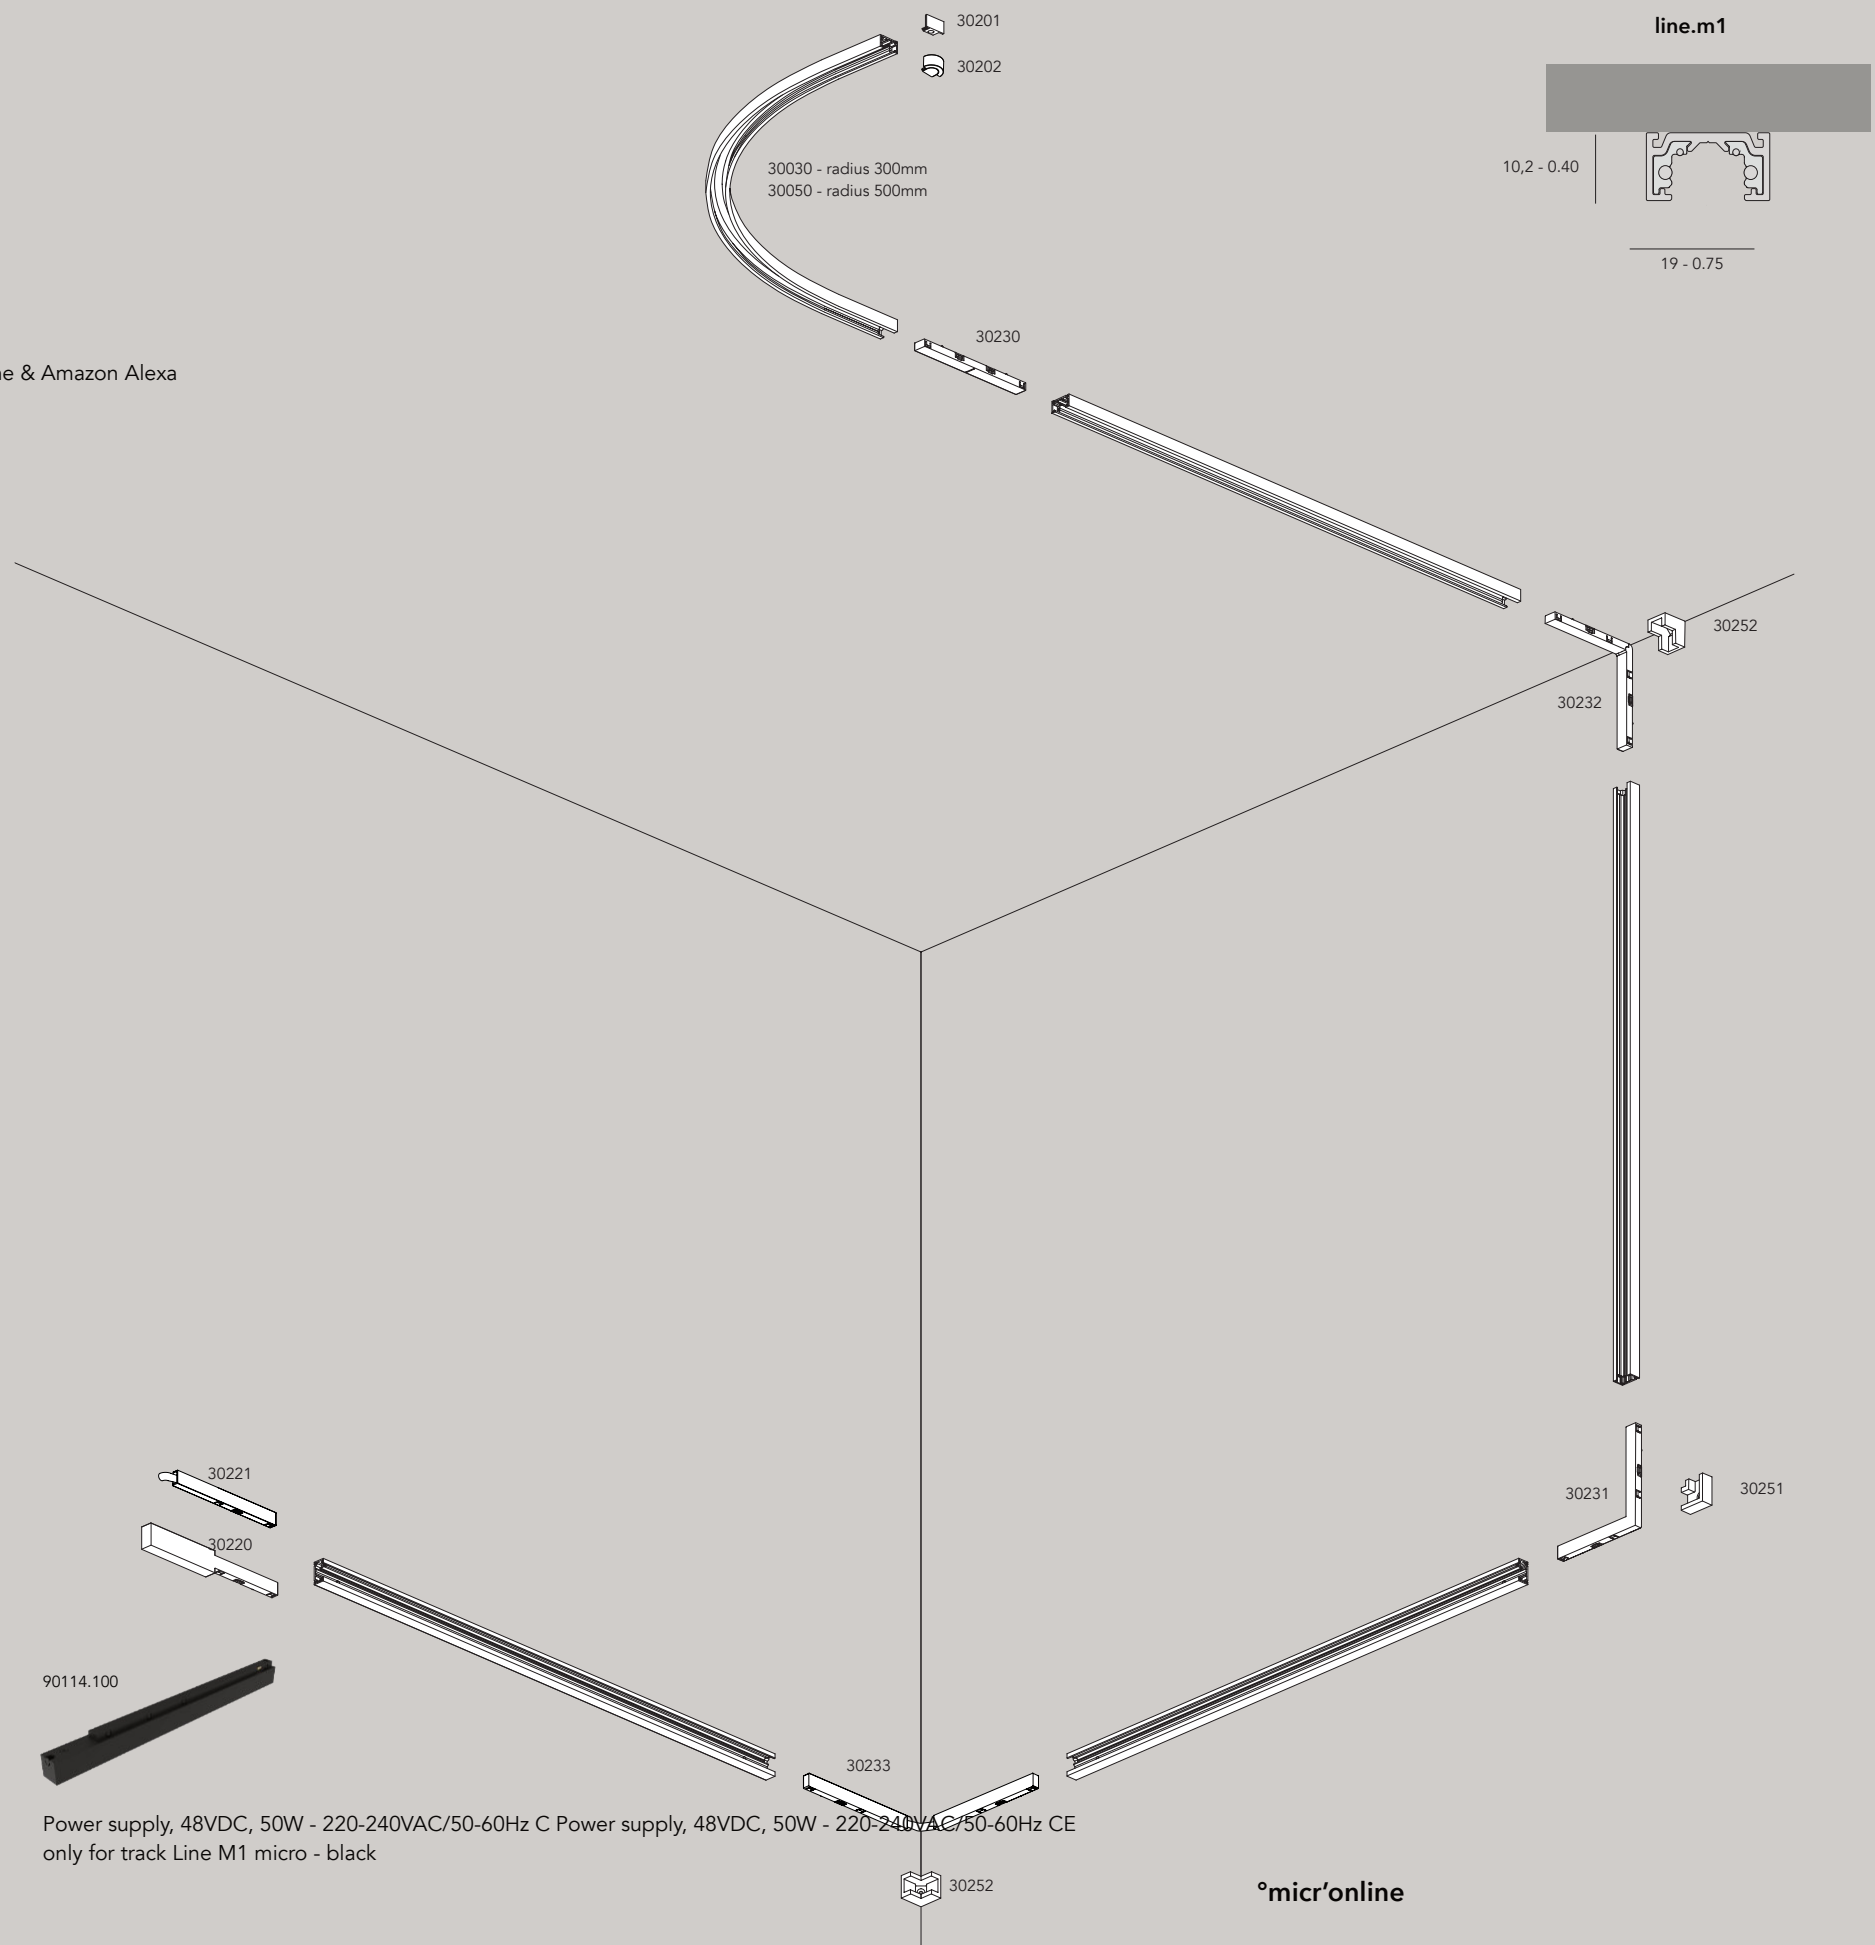

Power supply, 48VDC, 50W - 220-240VAC/50-60Hz C Power supply, 48VDC, 50W - 220-240VAC/50-60Hz CE
 only for track Line M1 micro - black

°line.m5

material aluminum
 voltage 48Vdc
 circuits 1 circuit 10A + 1A databus
 dimming DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa

IP20   

Order Code


30005.AA00.BBBB line.m5

AA	Finish
01	black
02	white (electrical parts inside are black)

BBBB	Length
1000	1000 mm
2000	2000 mm
3000	3000 mm
xxxx	xxxx mm (custom length)

Track Accessories


30205	endcap for m5
30221.0100	electrical feeder for m1, m5, m6 black
30221.0200	electrical feeder for m1, m5, m6 white
30230.0100	electrical jointing connector 180° black
30230.0200	electrical jointing connector 180° white
30231.0100	electrical jointing connector L 90° black
30231.0200	electrical jointing connector L 90° white
30232.0100	electrical jointing wall connector L 90° (+/- 10°) black
30232.0200	electrical jointing wall connector L 90° (+/- 10°) white
30233.0100	electrical jointing connector adjustable corner black
30233.0200	electrical jointing connector adjustable corner white
30271.0100	cover profile 1000mm for m5&6 black
30271.0200	cover profile 1000mm for m5&6 white
30272.0100	cover profile 2000mm for m5&6 black
30272.0200	cover profile 2000mm for m5&6 white
30273.0100	cover profile 3000mm for m5&6 black
30273.0200	cover profile 3000mm for m5&6 white
30051.0100	round corner 90°, radius 500 mm, black
30051.0200	round corner 90°, radius 500 mm, white

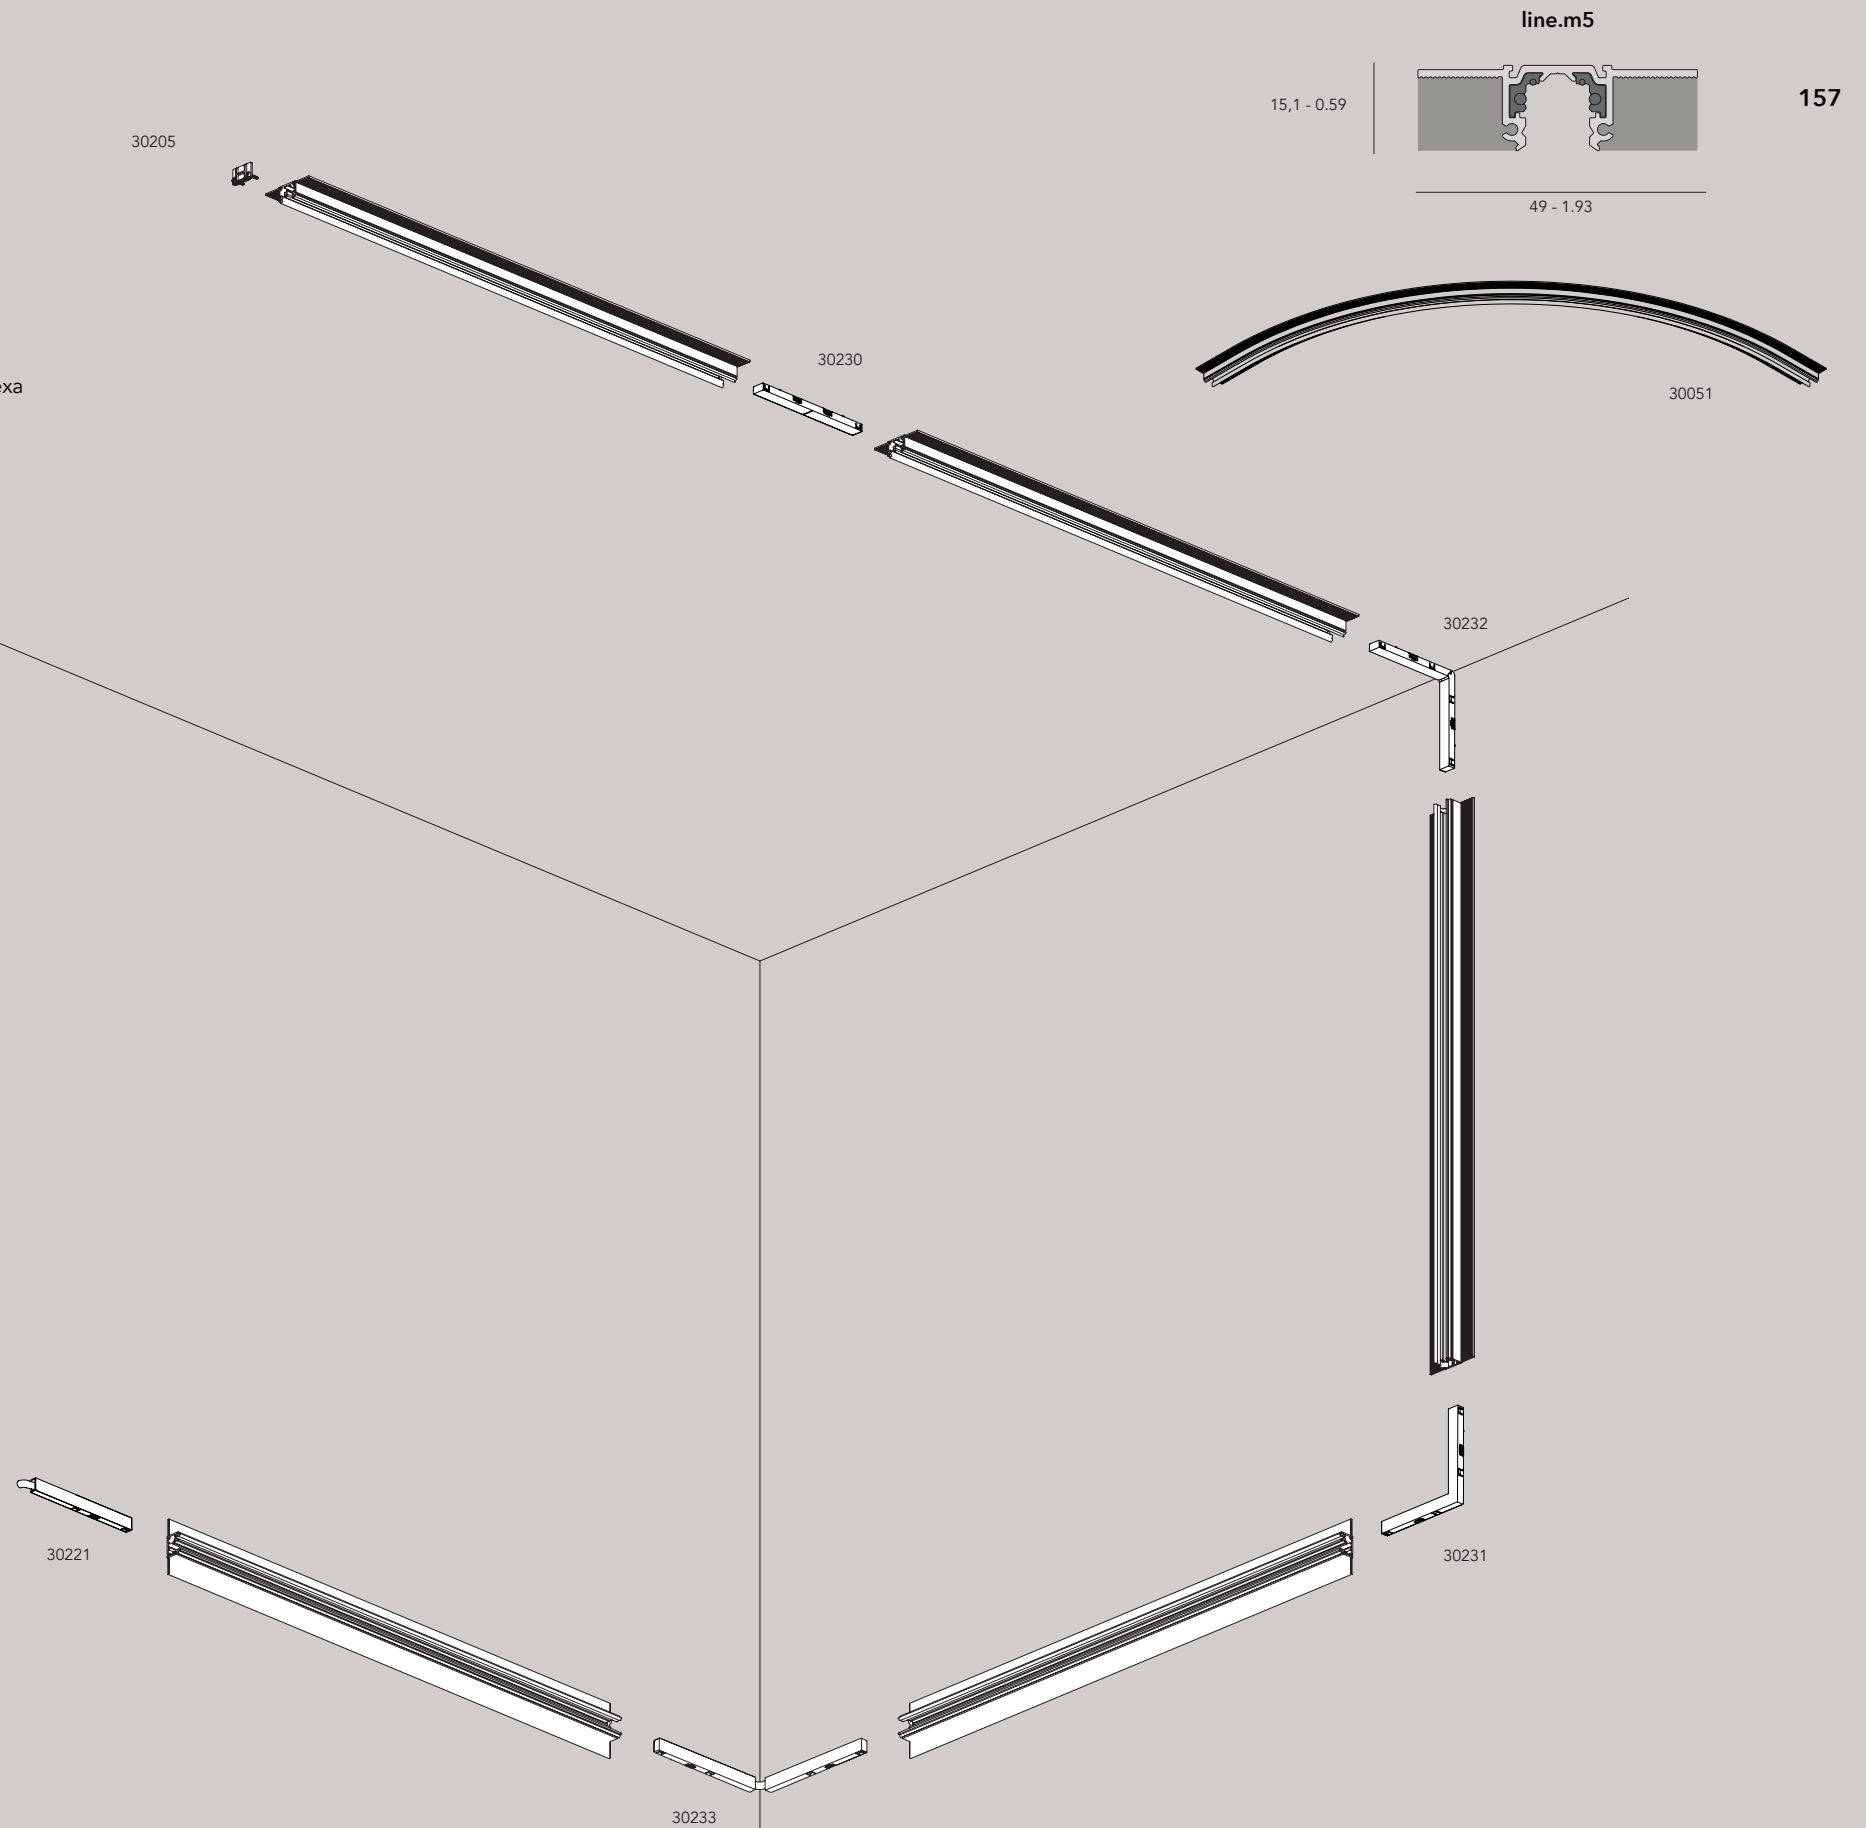

°line.m6

line.m6

25,8 - 1.01



19 - 0.75

material aluminum
 voltage 48Vdc
 circuits 1 circuit 10A + 1A databus
 dimming DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa

IP20

Order Code

30006.AA00.BBBB line.m6

AA Finish

01 black
 02 white

BBBB Length

1000 1000 mm
 2000 2000 mm
 3000 3000 mm
 xxxx xxxx mm (custom length)

Track Accessories


30206.0100 endcap for m6 black
 30206.0200 endcap for m6 white

30221.0100 electrical feeder for m1, m5, m6 black
 30221.0200 electrical feeder for m1, m5, m6 white

30230.0100 electrical jointing connector 180° black
 30230.0200 electrical jointing connector 180° white
 30231.0100 electrical jointing connector L 90° black
 30231.0200 electrical jointing connector L 90° white
 30232.0100 electrical jointing wall connector L 90° (+/- 10°) black
 30232.0200 electrical jointing wall connector L 90° (+/- 10°) white
 30233.0100 electrical jointing connector adjustable corner black
 30233.0200 electrical jointing connector adjustable corner white

30240 long suspension bracket m6 - 2m steel cable
 30241 long suspension bracket m6 - 6m steel cable
 30242 long mechanical joint connector for m6

30271.0100 cover profile 1000mm for m5&6 black
 30271.0200 cover profile 1000mm for m5&6 white
 30272.0100 cover profile 2000mm for m5&6 black
 30272.0200 cover profile 2000mm for m5&6 white
 30273.0100 cover profile 3000mm for m5&6 black
 30273.0200 cover profile 3000mm for m5&6 white

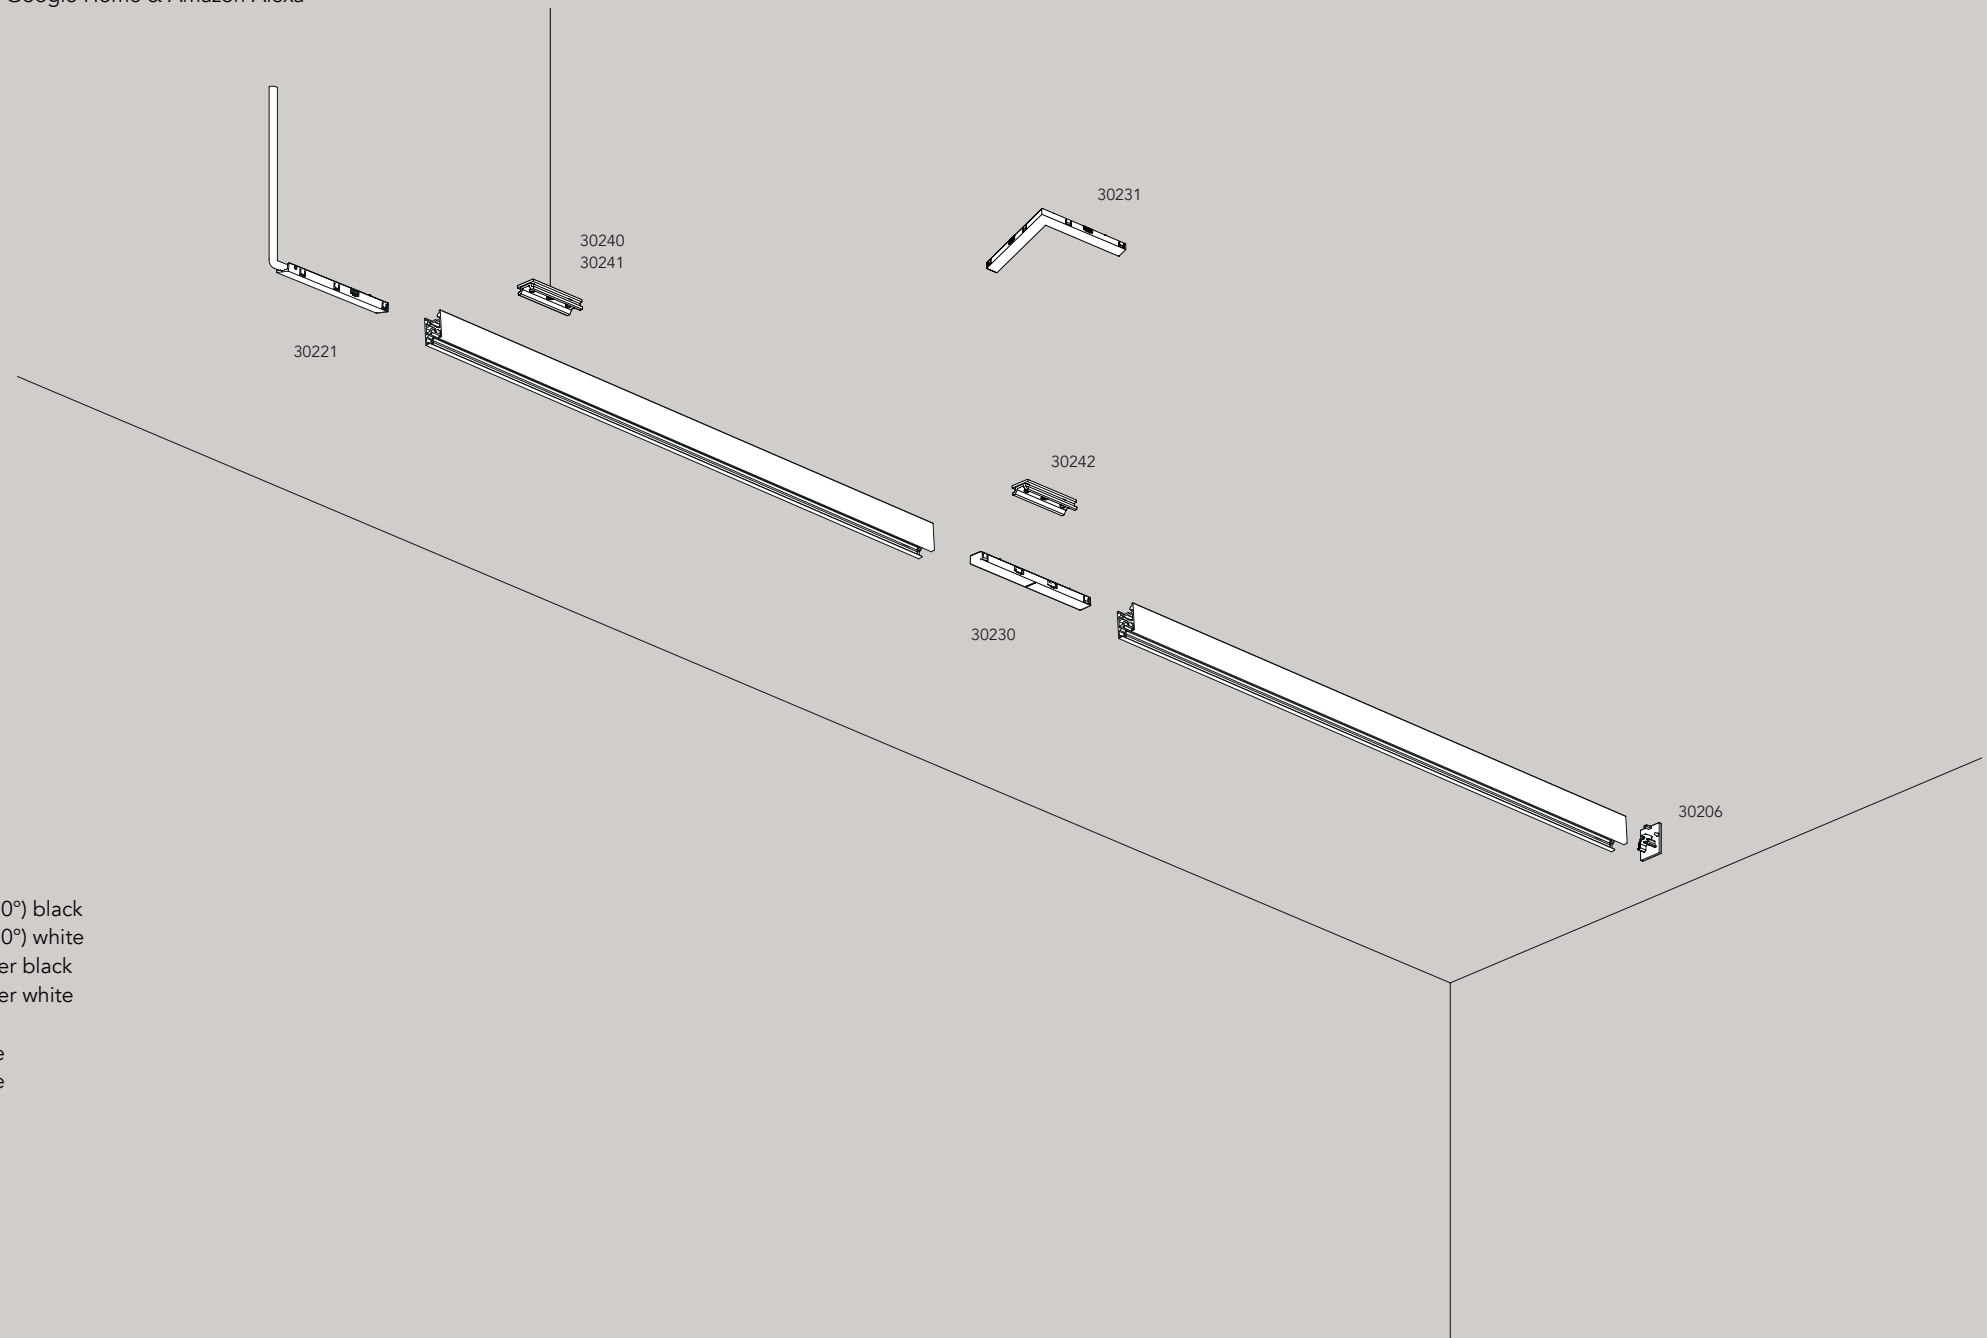

Drivers Order Code**remote**


90101.0000 Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
90102.0000 Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
90103.0000 Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
90104.0000 Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified

90110.0000 Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
90111.0000 Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed

90001.0000 0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
90002.0000 Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
90003.0000 Dali opto insulator for galvanic isolation

on track


90114.0100 Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE - black
90114.0200 Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE - white



°turn.micro

materials aluminum / PC
 weight 180 gr / 0.39 lb
 voltage 48 Vdc
 wattage 6W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi
 ugr <19

IP20   

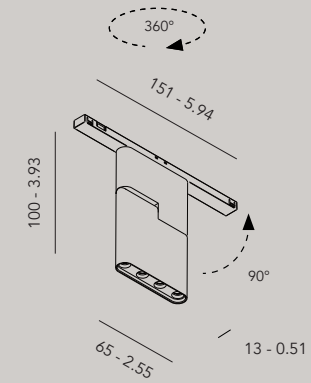

Order Code

30801.AA00.BBBB.CCC.DD turn.micro for line.m1
30805.AA00.BBBB.CCC.DD turn.micro for line.m5&6
30803.AA00.BBBB.CCC.DD turn.micro monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K


CCC	Optic	Output*
106	10° matt black reflector	290 lm - 2325 cd
206	20° matt black reflector	377 lm - 1850 cd
306	30° matt black reflector	335 lm - 825 cd
606	60° matt black reflector	320 lm - 330 cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM through interface)
CA	casambi


* Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.

Accessories for monopoint

22250 plaster kit






22251 ceiling rose



°knick.micro

materials aluminum / PC
 weight 600 gr / 1,32lb
 voltage 48 Vdc
 wattage 10W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi
 ugr <19

IP20  CE ENEC

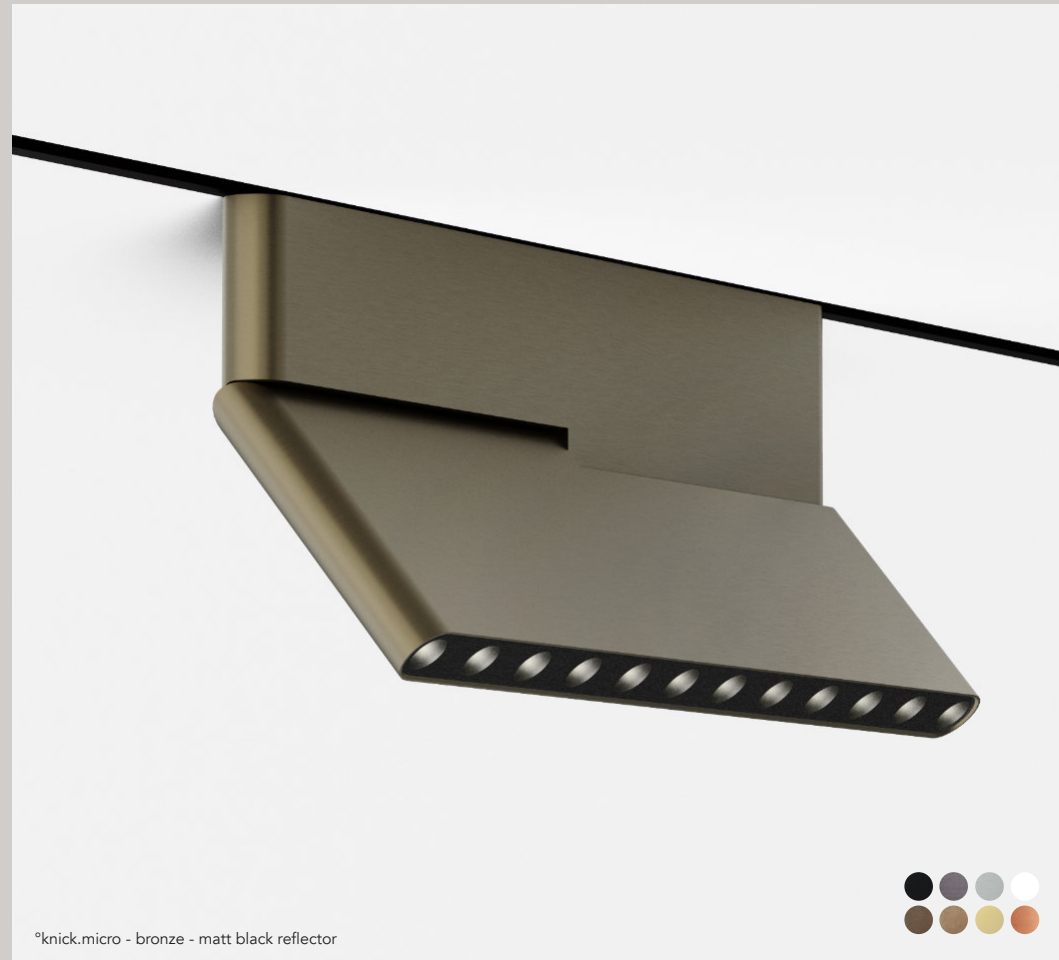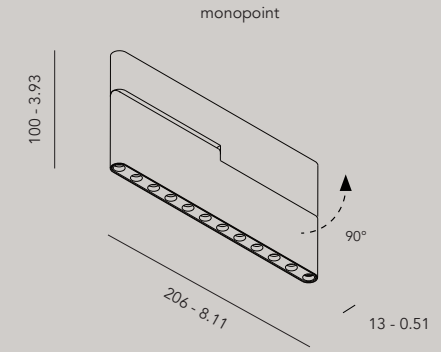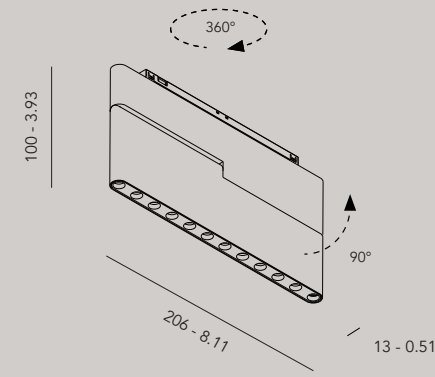

Order Code

- 30501.AA00.BBBB.CCC.DD knick micro for line.m1
- 30505.AA00.BBBB.CCC.DD knick micro for line.m5&6
- 30503.AA00.BBBB.CCC.DD knick micro monopoint

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K

CCC Optic	Output*
106 10° matt black reflector	730 lm - 5515 cd
206 20° matt black reflector	776 lm - 3825 cd
306 30° matt black reflector	653 lm - 1741 cd
606 60° matt black reflector	697 lm - 689 cd



- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM through interface)
 - CA casambi

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°out.micro

materials aluminum / PC
 weight 160 gr / 0,35 lb
 voltage 48 Vdc
 wattage 10 W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi
 ugr <19

IP20   

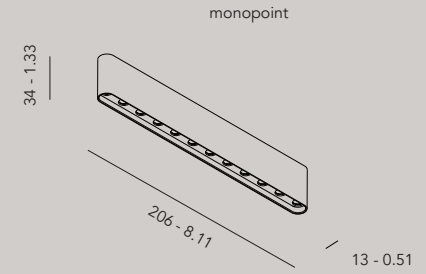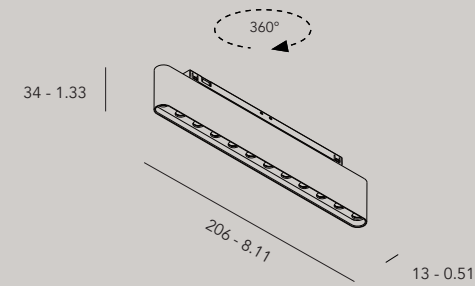

Order Code

- 31001.AA00.BBBB.CCC.DD out.micro for line.m1
- 31005.AA00.BBBB.CCC.DD out.micro for line.m5&6
- 31003.AA00.BBBB.CCC.DD out.micro monopoint

AA Finish

- 01 black
- 02 white
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

BBBB Light

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K

CCC Optic

CCC	Optic	Output*
106	10° matt black reflector	730 lm - 5515 cd
206	20° matt black reflector	776 lm - 3825 cd
306	30° matt black reflector	653 lm - 1741 cd
606	60° matt black reflector	697 lm - 689 cd

DD Dimming



- ND no dimming
- DA dali (0/1-10V, switchDIM through interface)
- CA casambi

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°in.micro

materials PC
 voltage 48 Vdc
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20  CE ENEC

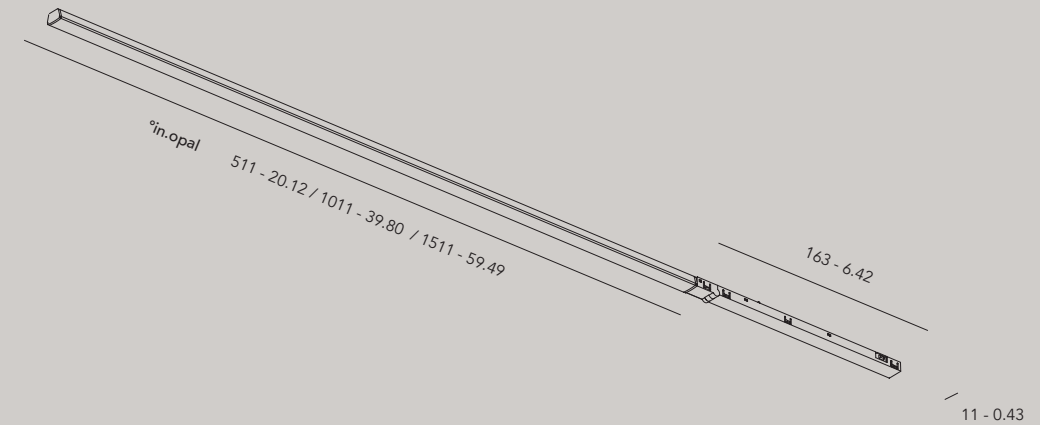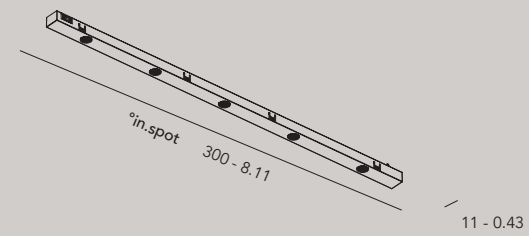

Order Code
 30601.AA00.BBBB.CCC.DD in.spot 300 mm

AA	Finish		
01	black		
02	white		
BBBB	Light		
9027	cri >90, 2700K		
9030	cri >90, 3000K		
CCC	Optic	Output*	
500	50° (5W)	350 lm	
DD	Dimming see 48V controls		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		

Order Code
 30701.AA00.BBBB.CCC.DD in.opal 511 mm
 30702.AA00.BBBB.CCC.DD in.opal 1011 mm
 30703.AA00.BBBB.CCC.DD in.opal **1511** mm


AA	Finish		
01	black		
BBBB	Light		
9027	cri >90, 2700K		
9030	cri >90, 3000K		
CCC	Optic	Output*	
001	opal diffuser 511 mm (5,5W)	429 lm	
001	opal diffuser 1011 mm (11W)	858 lm	
001	opal diffuser 1511 mm (16,5W)	1287 lm	
DD	Dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bevel

materials aluminum / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

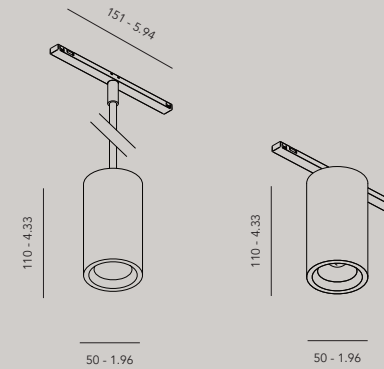

Order Code

- 31701.AA00.BBBB.CCC.DD bevel pendant m1
- 31705.AA00.BBBB.CCC.DD bevel pendant m5&6
- 31801.AA00.BBBB.CCC.DD bevel on track m1
- 31805.AA00.BBBB.CCC.DD bevel on track m5&6

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri 95, 2700K
 - 9530 cri 95, 3000K

CCC	Optic	Output*
300	20°	430lm
450	30°	525lm
600	50°	690lm


- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM through interface)
 - CA casambi

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°drop

materials	aluminum / PC
weight	100gr / 1.32lb
voltage	48 Vdc
wattage	4 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

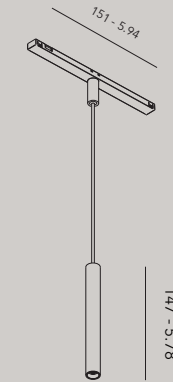

Order Code

21800.AA00.BBBB.CCC.DD drop pendant

AA Finish

01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB Light

9527	cri 95, 2700K
9530	cri 95, 3000K

CCC Optic

CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd

DD Dimming


ND	no dimming
DA	dali (0/1-10V, switchDIM through interface)
CA	casambi

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°tubu 30

materials aluminum coated / glass lens
 weight 100gr / 1.91lb / piece
 voltage 48 Vdc for track / 120-240Vac for monopoint
 wattage 5,5W
 ugr <19

IP20  CE ENEC

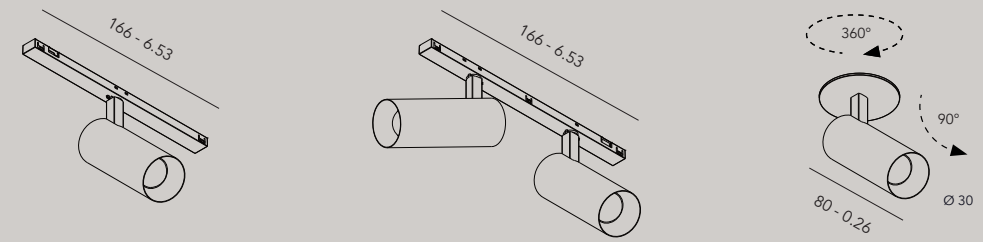

Order Code

31901.AA00.BBBB.CCC.DD tubu 30
 31902.AA00.BBBB.CCC.DD tubu 30 x 2

31903.AA00.BBBB.CCC.DD tubu 30 monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K
DW27	cri 90, 2700-1800K



CCC	Optic	for 3000K, single spot
200	20°	280lm - 1700cd
300	30°	520lm - 1900cd
500	50°	570lm - 800cd

DD	Dimming
ND	no dim
DA	dali (0/1-10V through interface)
CA	casambi

°tubu 40

materials aluminum / PC
 weight 200gr / 0.44lb
 voltage 48 Vdc
 wattage 6,7 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   

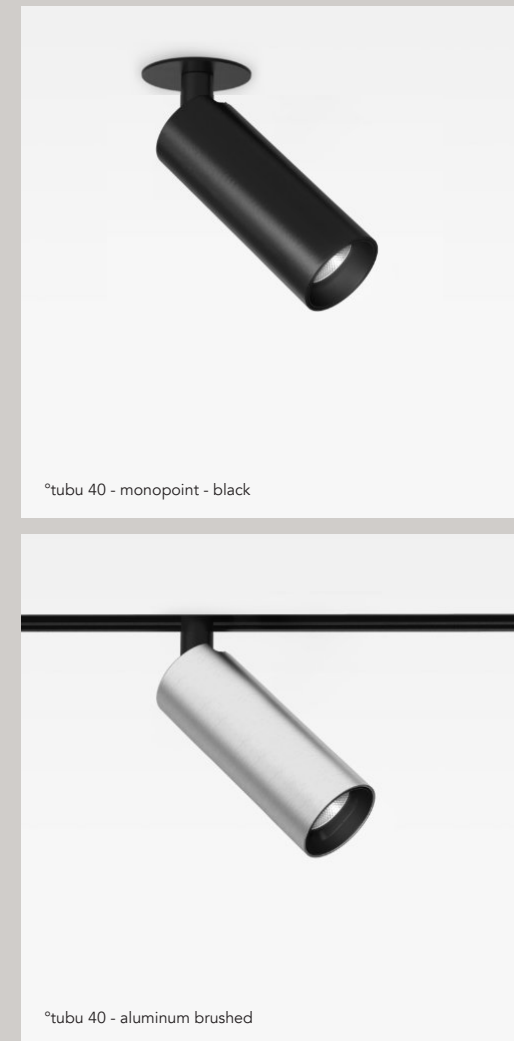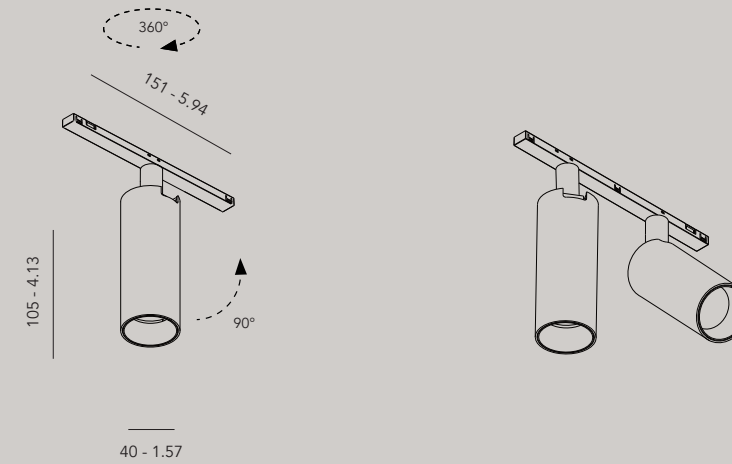

Order Code

- 31401.AA00.BBBB.CCC.DD tubu 40 for line.m1
- 31405.AA00.BBBB.CCC.DD tubu 40 for line.m5&6
- 31421.AA00.BBBB.CCC.DD double tubu 40 for line.m1
- 31425.AA00.BBBB.CCC.DD double tubu 40 for line.m5&6
- 11403.AA00.BBBB.CCC.DD tubu 40 monopoint

AA Finish

- 01 black
- 02 white
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

BBBB Light

- 9527 cri 95, 2700K
- 9530 cri 95, 3000K

CCC Optic

- 250 25°

Output*

420lm - 1970cd

DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM through interface)
- CA casambi

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc

°bloc

179

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne



new

new







°bloc.stripe & °bloc white
Interior Casa Vero - light design Jeune Concept







°bloc

187



°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten



°bloc.spot (oak) & °bloc (carrara)




°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC



°bloc

191


set-up guide

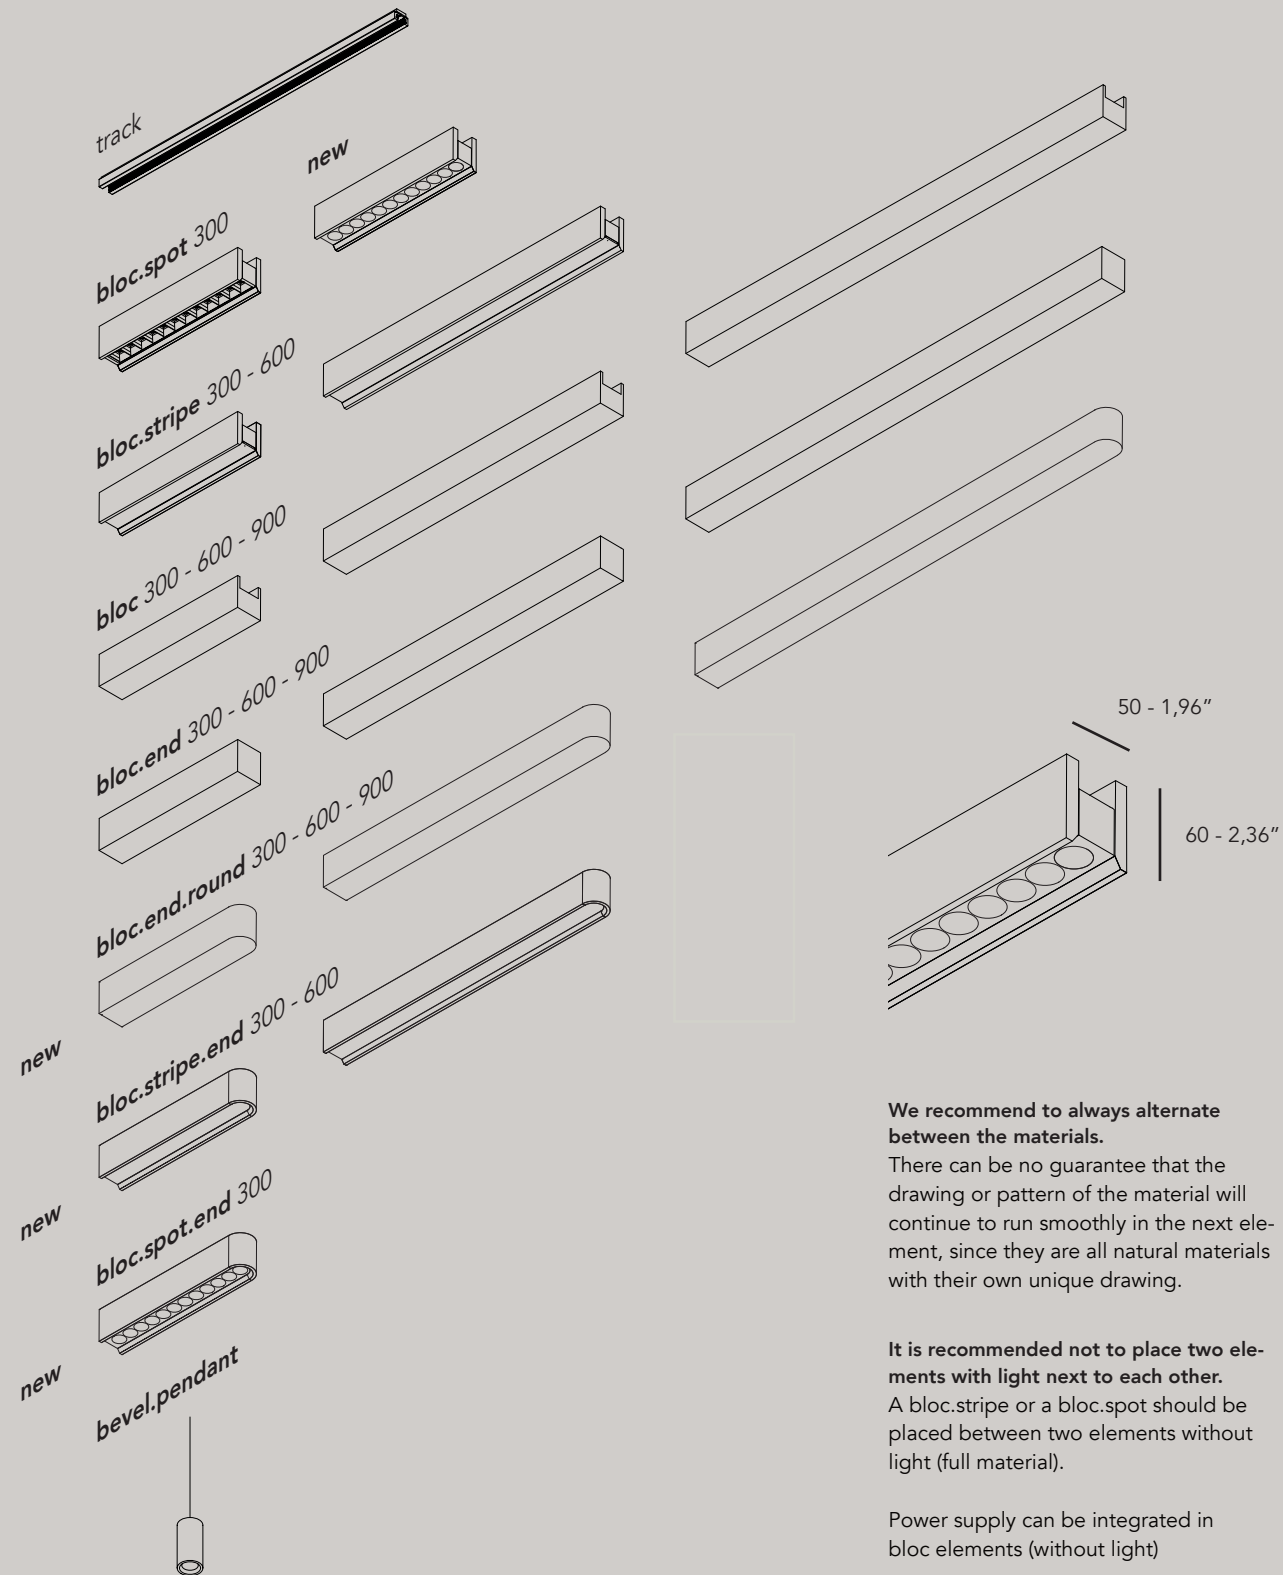

We recommend to always alternate between the materials.
 There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.
 A bloc.stripe or a bloc.spot should be placed between two elements without light (full material).

Power supply can be integrated in bloc elements (without light)

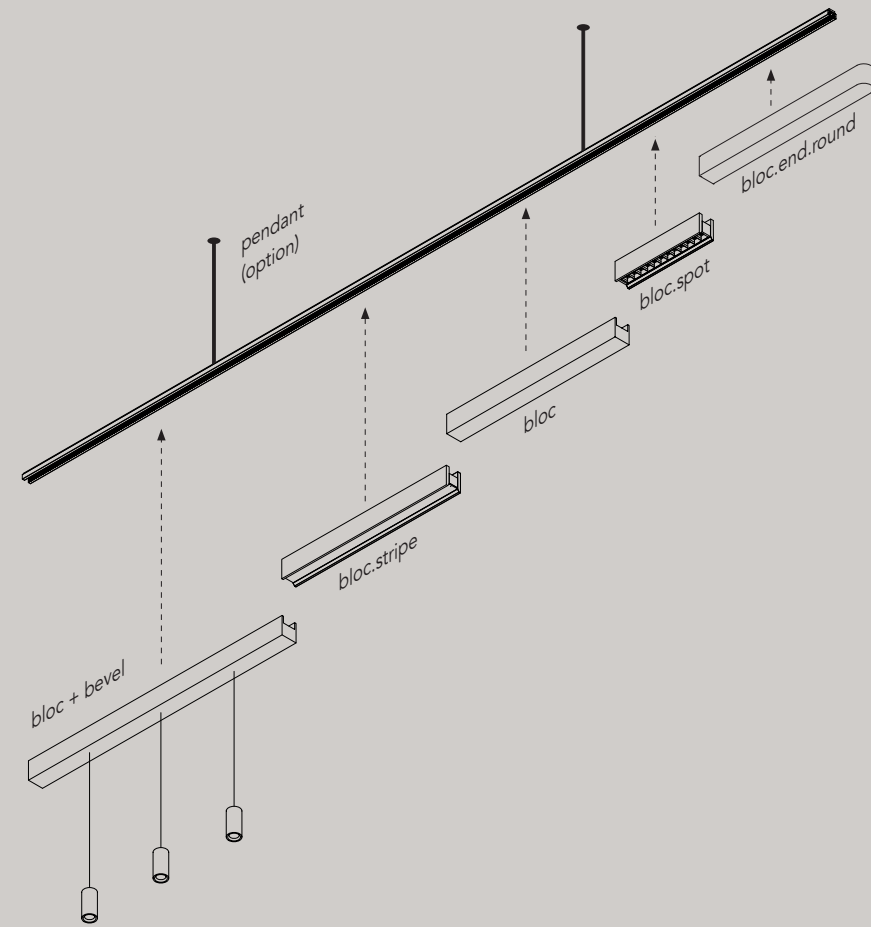

Order Code	BBBB	Length
20000.0100.BBBB bloc track black	0500	500 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm


Accessories

- 20252.0000 bloc track pendant 2 m steel cable suspension (incl. elec. cable)
- 20253.0000 bloc track pendant 2 m steel cable suspension (1 per meter)
- 20254.0000 bloc track pendant 2 m bar suspension (incl. elec. cable)
- 20255.0000 bloc track pendant 2 m bar suspension (1 per meter)

- 20220.0100 bloc track electrical feeder
- 20221.0100 bloc electrical joint 180°

Drivers remote




- 90101.0000 Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90102.0000 Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90103.0000 Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90104.0000 Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90110.0000 Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
- 90111.0000 Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed
- 90001.0000 0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
- 90002.0000 Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
- 90003.0000 Dali opto insulator for galvanic isolation

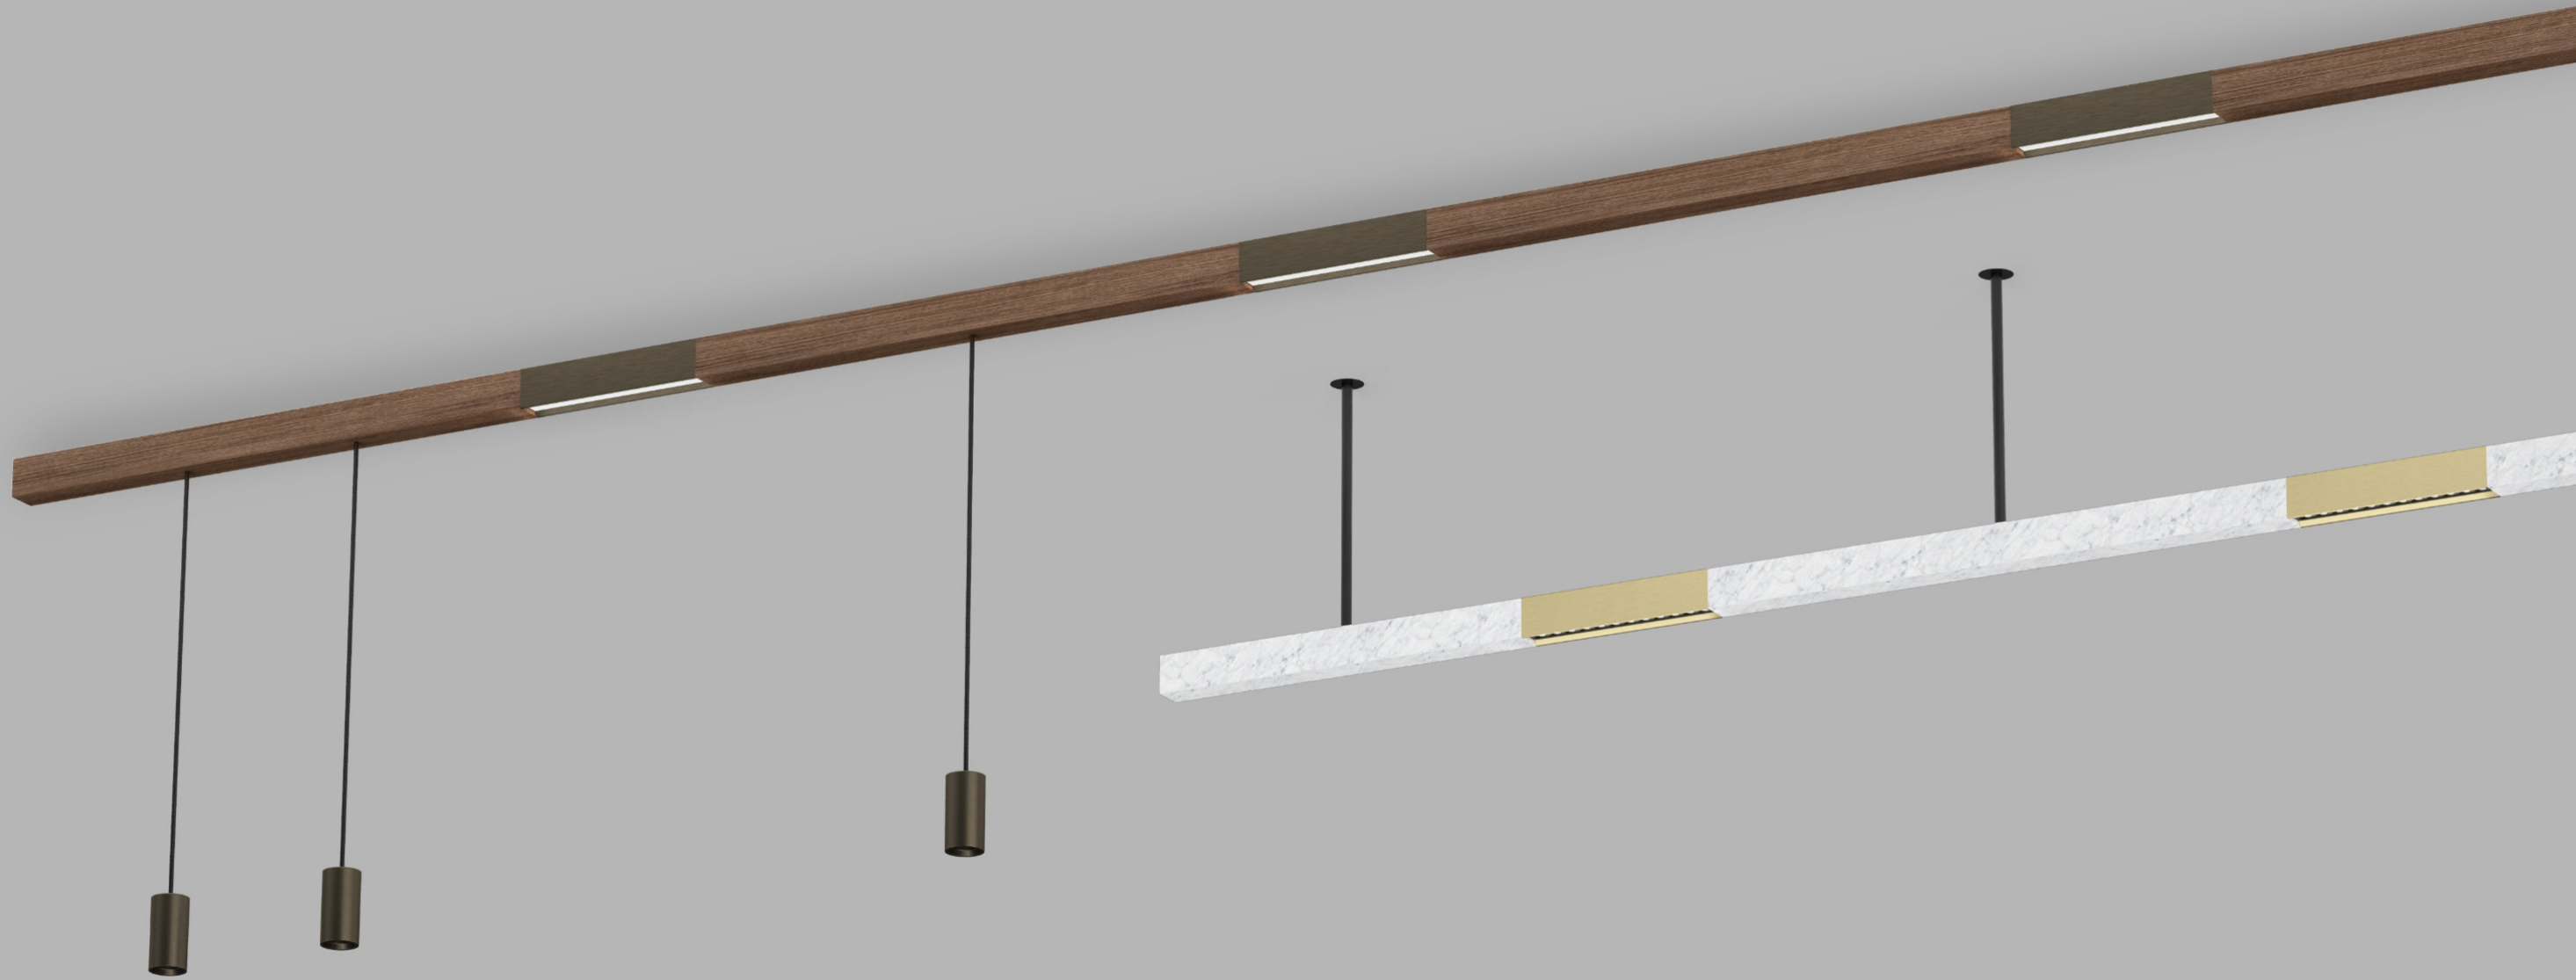

° bloc.spot

materials aluminum / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 ugr <10
 wattage 13W - 26W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   



Order Code

20300.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector
20301.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector high output

20310.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector
20311.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector high output

20312.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector & round end
20313.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector & round end high output


- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

CCC Optic	Output*	High output*
200 20 deg	1090lm - 5650cd	1870lm - 9770cd
300 30 deg	1055lm - 3310cd	1820lm - 5750cd
600 60 deg	1090lm - 1200cd	1870lm - 2060cd


- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM through interface)
 - CA casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

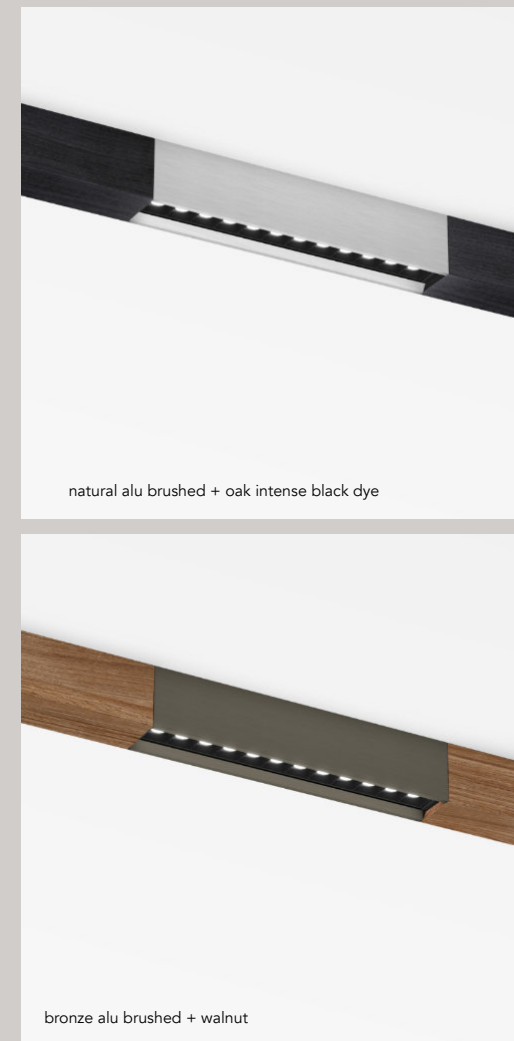

°bloc.stripe

materials aluminum / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 wattage 8,2W - 16,4W (high output) for 300mm
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

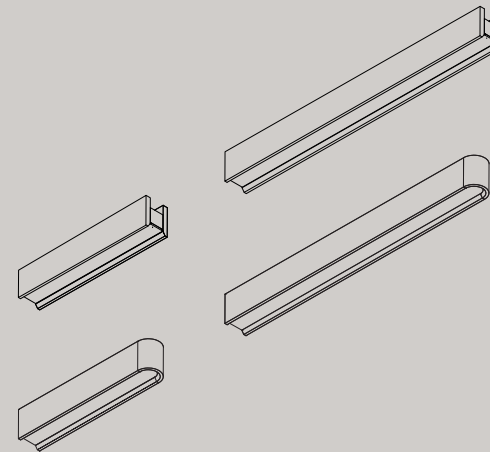

Order Code

- 20400.AA00.BBBB.CCC.DD bloc stripe 300
- 20401.AA00.BBBB.CCC.DD bloc stripe 300 high output*
- 20404.AA00.BBBB.CCC.DD bloc stripe 300 end
- 20405.AA00.BBBB.CCC.DD bloc stripe 300 end high output*
- 20410.AA00.BBBB.CCC.DD bloc stripe 600
- 20411.AA00.BBBB.CCC.DD bloc stripe 600 high output*
- 20414.AA00.BBBB.CCC.DD bloc stripe 600 end
- 20415.AA00.BBBB.CCC.DD bloc stripe 600 end high output*

*only available for alu finishes & black/white paint

IP20 CE ENEC



°bloc stripe 300 - brass alu brushed + natural oak



brass alu brushed, round end + carrara bianco



°bloc stripe 600 - brass alu brushed + carrara bianco



bronze alu brushed + oak classic brown dye

AA Finish

- 01 black
- 02 white
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

BBBB	Light	Output	High output*
9527	cri >95, 2700K	880lm - 310cd	1610lm - 560cd
9530	cri >95, 3000K	780lm - 370cd	1430lm - 680cd
9540	cri >95, 4000K - on request		

CCC Optic

- 001 frosted ice
- 002 microprism

DD Dimming


- ND no dimming
- DA dali (0/1-10V, switchDIM through interface)
- CA casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bevel bloc

materials aluminum / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

IP20   

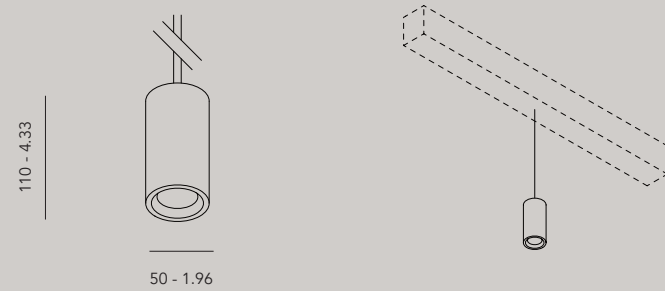

Order Code

20500.AA00.BBBB.CCC.DD bevel
 20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 202)

max. 1 °bevel on bloc.300
 max. 2 °bevel on bloc.600
 max. 3 °bevel on bloc.900

- | | |
|-----------|---------------------------|
| AA | Finish |
| 01 | black |
| 02 | white |
| 22 | natural alu brushed |
| 23 | brass alu brushed |
| 25 | bronze alu brushed |
| 26 | dark bronze alu brushed |
| 27 | gun metal alu brushed |
| 28 | nickel alu brushed |
| 32 | copper alu brushed |
| 03 | painting custom NCS color |

- | | |
|-------------|---------------|
| BBBB | Light |
| 9527 | cri 95, 2700K |
| 9530 | cri 95, 3000K |

- | | | |
|------------|--------------|----------------|
| CCC | Optic | Output* |
| 300 | 20° | 430lm |
| 450 | 30° | 525lm |
| 600 | 50° | 690lm |

- | | |
|-----------|---------------------------------------------|
| DD | Dimming |
| ND | no dimming |
| DA | dali (0/1-10V, switchDIM through interface) |
| CA | casambi control |

* Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.

°bloc

°bloc colors


Order Code

- 20600.AA00 bloc 300
- 20610.AA00 bloc 600
- 20620.AA00 bloc 900
- 20601.AA00 bloc 300 end
- 20611.AA00 bloc 600 end
- 20621.AA00 bloc 900 end
- 20603.AA00 bloc 300 end round
- 20613.AA00 bloc 600 end round
- 20623.AA00 bloc 900 end round

bloc
300-600-900

bloc end
300-600-900


bloc end round
300-600-900

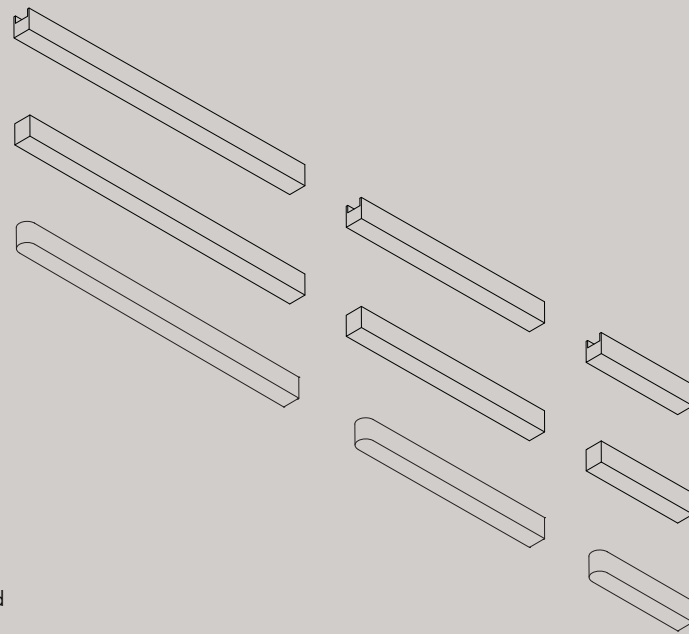

- | AA | Finish |
|----|-----------------------------|
| 01 | black |
| 02 | white |
| 40 | walnut, natural waxed |
| 41 | oak natural, natural waxed |
| 42 | oak classic brown dye |
| 43 | oak intense black dye |
| 61 | carrara bianco extra, honed |

Custom material on request
Oak can be dyed in reference color

- | 00 | Driver |
|----|----------------------------|
| 00 | not included |
| 01 | power supply 100W included |

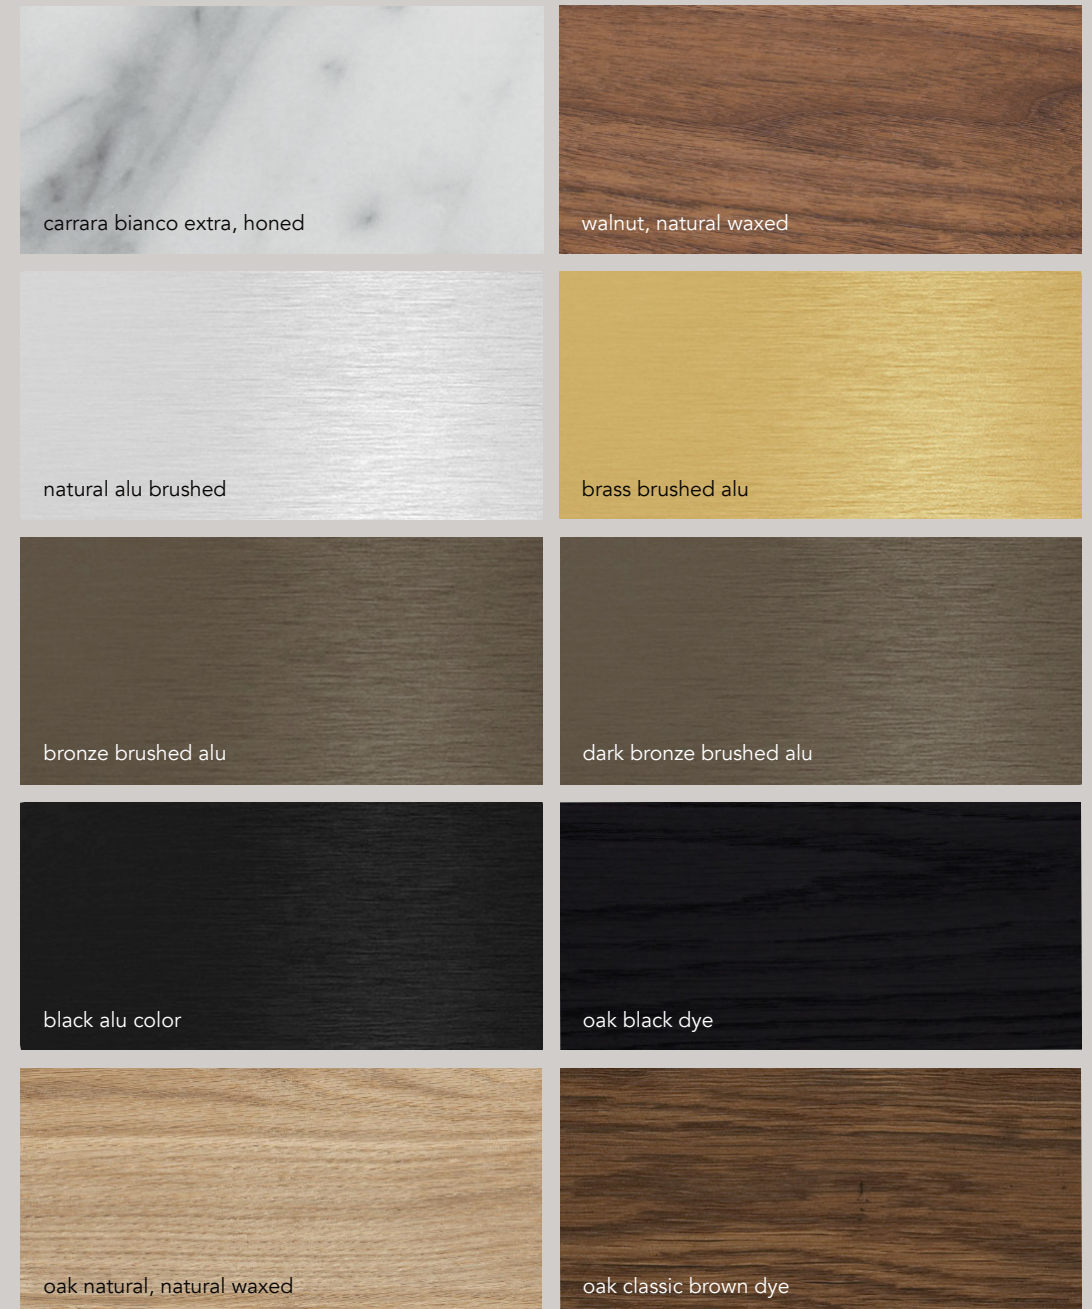

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

°bloc.line

Bloc is now available as full length profile.
Choose your down- and uplights.



Wall




300, 600 mm
or custom



° bloc.mono

materials aluminum coated / PC
 weight from 0,5-5kg
 voltage 230 Vac (110V on request)
 wattage 8,2W - 16,4W (high output)
 power supply integrated in fixture
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20  CE ENEC

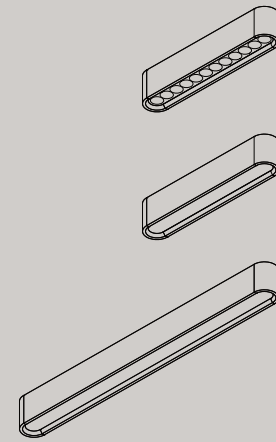

Order Code

- 20700.AA00.BBBB.CCC.DD bloc spot mono 300
- 20701.AA00.BBBB.CCC.DD bloc spot mono 300 high output
- 20702.AA00.BBBB.CCC.DD bloc stripe mono 300
- 20703.AA00.BBBB.CCC.DD bloc stripe mono 300 high output
- 20710.AA00.BBBB.CCC.DD bloc stripe mono 600
- 20711.AA00.BBBB.CCC.DD bloc stripe mono 600 high output



mono stripe - frosted ice diffuser - bronze brushed - wall



aluminum brushed + round reflector



bronze alu brushed + opal diffuser

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

CCC	Optic	Output	High output
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd

- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)
 - CA casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.
 ** For stripe 300

°bloc.line

materials aluminum / PC
 weight 3 kg/lm
 voltage 230 Vac (110V on request)
 wattage 13W / 26W (high output) per spot or 28 W/m with diffuser
 power supply integrated in fixture
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   




Order Code

20803.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, 3 spots
20830.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, diffuser

20804.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, 4 spots
20840.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, diffuser

20805.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, 5 spots
20850.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, diffuser

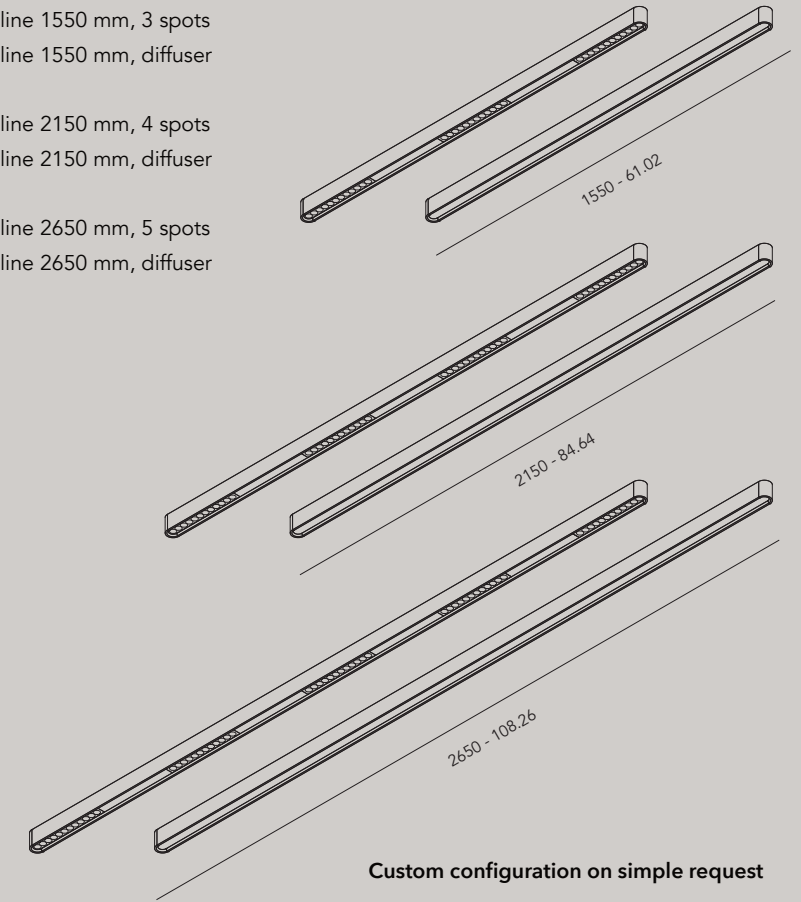

Custom configuration on simple request

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- 00 Suspension**
- 00 surface
 - 01 pendant

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

- CCC Down Light**
- | | | |
|-----|----------------------|----------------------|
| 001 | frosted ice diffuser | 2913lm/m |
| 002 | microprism diffuser | 2913lm/m |
| 200 | 20 deg spots | 1090lm - 5650cd/spot |
| 300 | 30 deg spots | 1055lm - 3310cd/spot |
| 600 | 60 deg spots | 1090lm - 1200cd/spot |


- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)

- EE Up Light (28 W/m)**
- 01 none
 - 02 uplight (same color light as downlight)

Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.

° suspension

Steel cable suspension surface (adjustment height at fixture)




- 20256** Cylindrical nickel ceiling attachment with 1 mm steel cable - 2 m
20257 Cylindrical nickel ceiling attachment with 1 mm steel cable - 6 m



diam. 14mm x 16 mm

Round rosas with steel cable suspension (adjustment height at fixture)

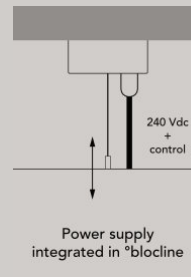

62 mm

- 20260.01** Black round rosas 62 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 2 m
20260.02 White round rosas 62 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 2 m
20260.03 Black round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m
20260.04 White round rosas 62 mm with 1 mm steel cable + white 5x0,75 mm² cable - 2 m
20260.05 White round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

- 20261.01** Black round rosas 62 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 6 m
20261.02 White round rosas 62 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 6 m
20261.03 Black round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m
20261.04 White round rosas 62 mm with 1 mm steel cable + white 5x0,75 mm² cable - 6 m
20261.05 White round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

∅ 62 x 32



82 mm

- 20262.01** Black round rosas 82 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 2 m
20262.02 White round rosas 82 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 2 m
20262.03 Black round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m
20262.04 White round rosas 82 mm with 1 mm steel cable + white 5x0,75 mm² cable - 2 m
20262.05 White round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

- 20263.01** Black round rosas 82 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 6 m
20263.02 White round rosas 82 mm with 1 mm steel cable + transparent 5x0,75 mm² cable - 6 m
20263.03 Black round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m
20263.04 White round rosas 82 mm with 1 mm steel cable + white 5x0,75 mm² cable - 6 m
20263.05 White round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

∅ 82 x 32




° ceiling rose

Order Code Surface

PARTNUMBER.0100 black

PARTNUMBER.0200 white

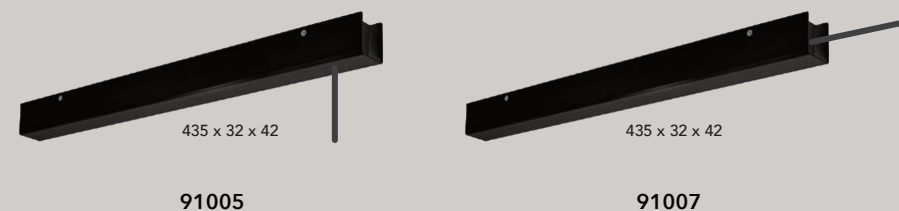

Only the ceiling box, to be combined with a suitable power supply.

- 91005.0100 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - black
- 91005.0200 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - white
- 91007.0100 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - black
- 91007.0200 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - white

Order Code Recessed

- 91003.AA00 recessed canopy 50 mm
- 91002.AA00 recessed canopy 80 mm
- 91004.AA00 recessed canopy 68 mm

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color



Suitable power cable:

- Transparant power cable 5x75 mm²
- Black textile power cable 5x75 mm²

Suitable steel cable:

- Suspension steel cable 0,6 mm (plug)
- Suspension steel cable 1 mm (blocline)

°bevel

The °bevel collection is being expanded with a surface mounted, recessed and a pendant monopoint version.

°bevel, known for its unique details at the top and bottom now have a new feature: a beautiful glass lens.

The fixture can also be combined with °line S, °bloc and °micr'online collections. °bevel comes in different aluminum finishes.



°bevel surface



°bevel recessed

°bevel recessed outdoor



°bevel recessed - bronze brushed



°bevel surface - bronze brushed



°bevel recessed - pendant - surface / bronze brushed

°bevel recessed

materials aluminum / glass
 weight 150gr / 0.33lb
 voltage 230 Vac (110V on request), remote driver
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, phase cut, Casambi

IP20   



°bevel recessed - natural alu brushed



Order Code

20502.AA00.BBBB.CCC.DD bevel recessed

- AA Finish**
 01 black
 02 white
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 32 copper alu brushed
 03 painted custom NCS color

- BBBB Light**
 9527 cri 95, 2700K
 9530 cri 95, 3000K

- | | |
|------------------|-----------------------------|
| CCC Optic | Output 3000K - 350mA |
| 300 20° | 430lm |
| 450 30° | 525lm |
| 600 50° | 690lm |

- DD Dimming**
 ND no dimming
 DA dali
 PH phase-cut
 CA casambi


Asseccories

9

°bevel surface

materials aluminum / glass
 weight 300gr / 0.66lb
 voltage 230 Vac (110V on request), integrated driver
 wattage 8,2 W
 ugr <19
 dimming DALI, phase cut, Casambi

IP20   

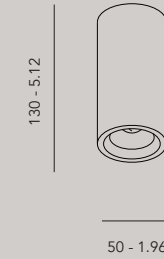

Order Code

20503.AA00.BBBB.CCC.DD bevel surface

- AA Finish**
 01 black
 02 white
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 32 copper alu brushed
 03 painted custom NCS color

- BBBB Light**
 9527 cri 95, 2700K
 9530 cri 95, 3000K

- CCC Optic**
 300 20°
 450 30°
 600 50°

- Output 3000°K - 350mA**
 430lm
 525lm
 690lm

- DD Dimming**
 ND no dimming
 DA dali
 PH phase-cut
 CA casambi

° on line

The classic.

The power of this light source lies in its slenderness and unobtrusiveness; the simplicity of the fixtures' design makes that it can be used anywhere. An innovative and state-of-the-art magnet and contact system makes that a wide variety of led-fixtures can be easily inserted or moved.

The led-fixtures are similar in style yet each one of them has its own character and lighting quality.

Eden Design was the first to introduce this magnet system on the market. First presentation was in 2010 on the designfair Interieur Kortrijk, Belgium.

This collection won several awards, such as:

- The Best of the Best Red Dot Award (2011)
- Design Plus powered by Light & Building (2012)
- Henry van de Velde Label (2010)

Design by Bart Lens



reddot design award
best of the best 2011




DESIGN PLUS
powered by: light+building





°online / Grey Office, Greece - architects eDJe - photograph by Vangelis Paterakis

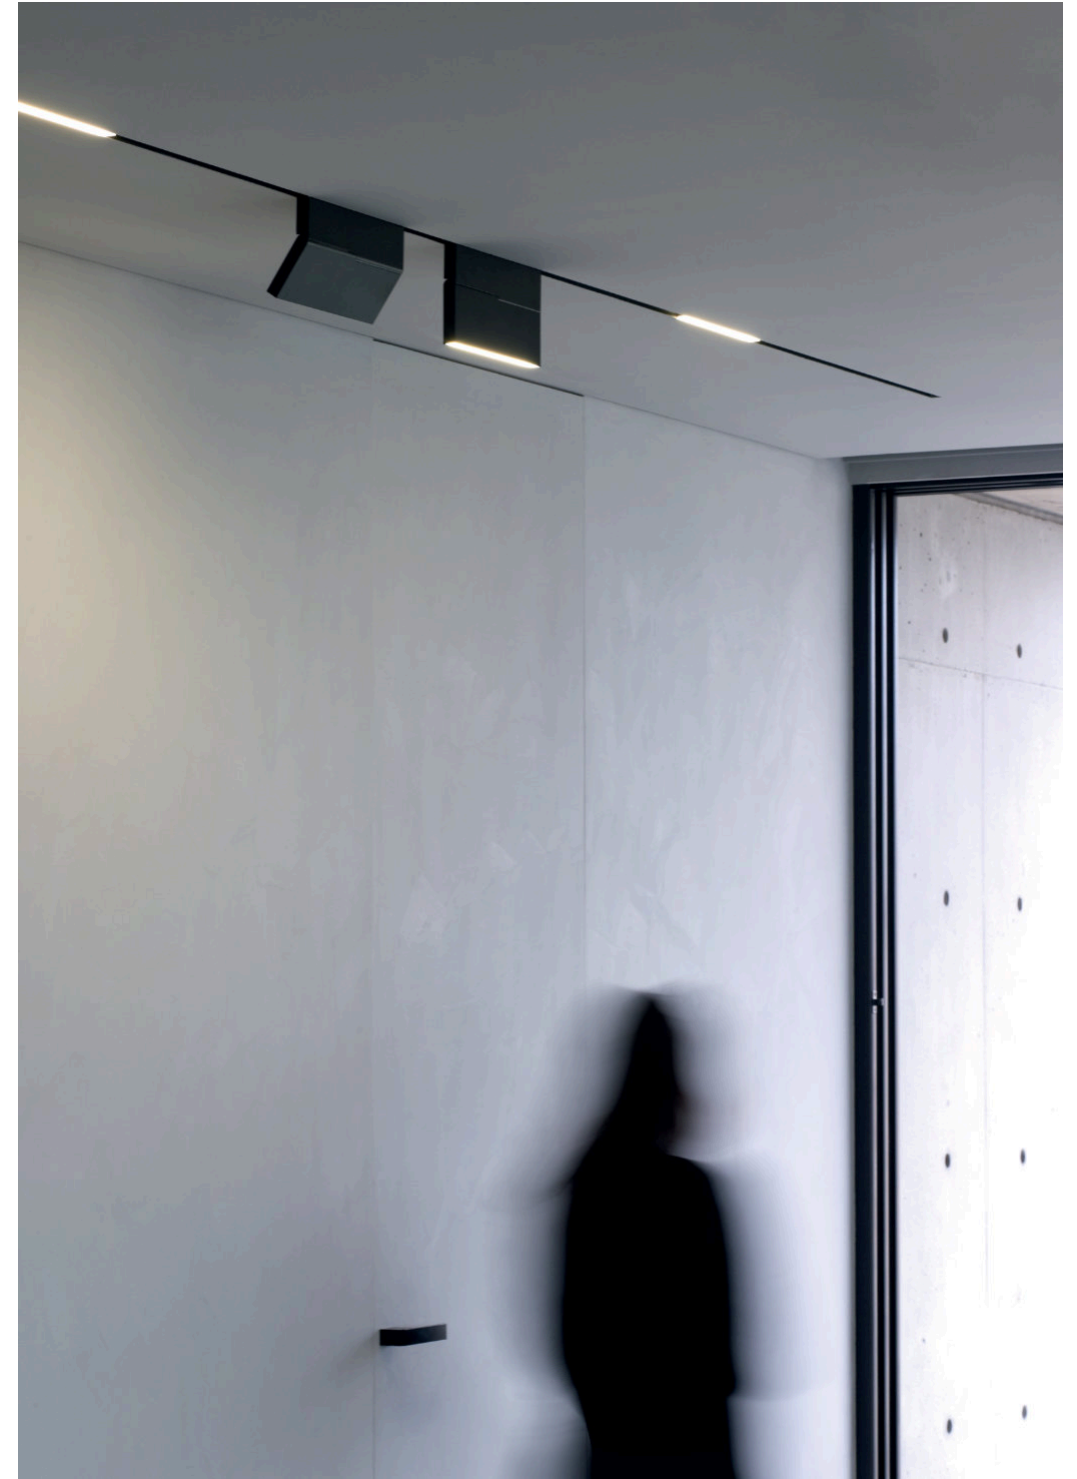

°online / Grey Office, Greece- architects eDJe - photograph by Vangelis Paterakis





*knick small monopoint - brass alu brushed



*knick - brass alu brushed



°turn

°in.small



°dot

°knick.small

°knick


°out

°in

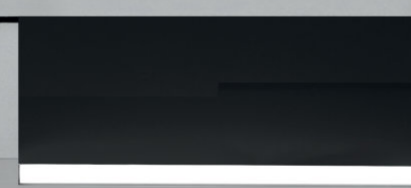



*knick & *out, monopoint / B-house - architect Pitsou Kedem (Ran Broides) - photography by Amit Geron

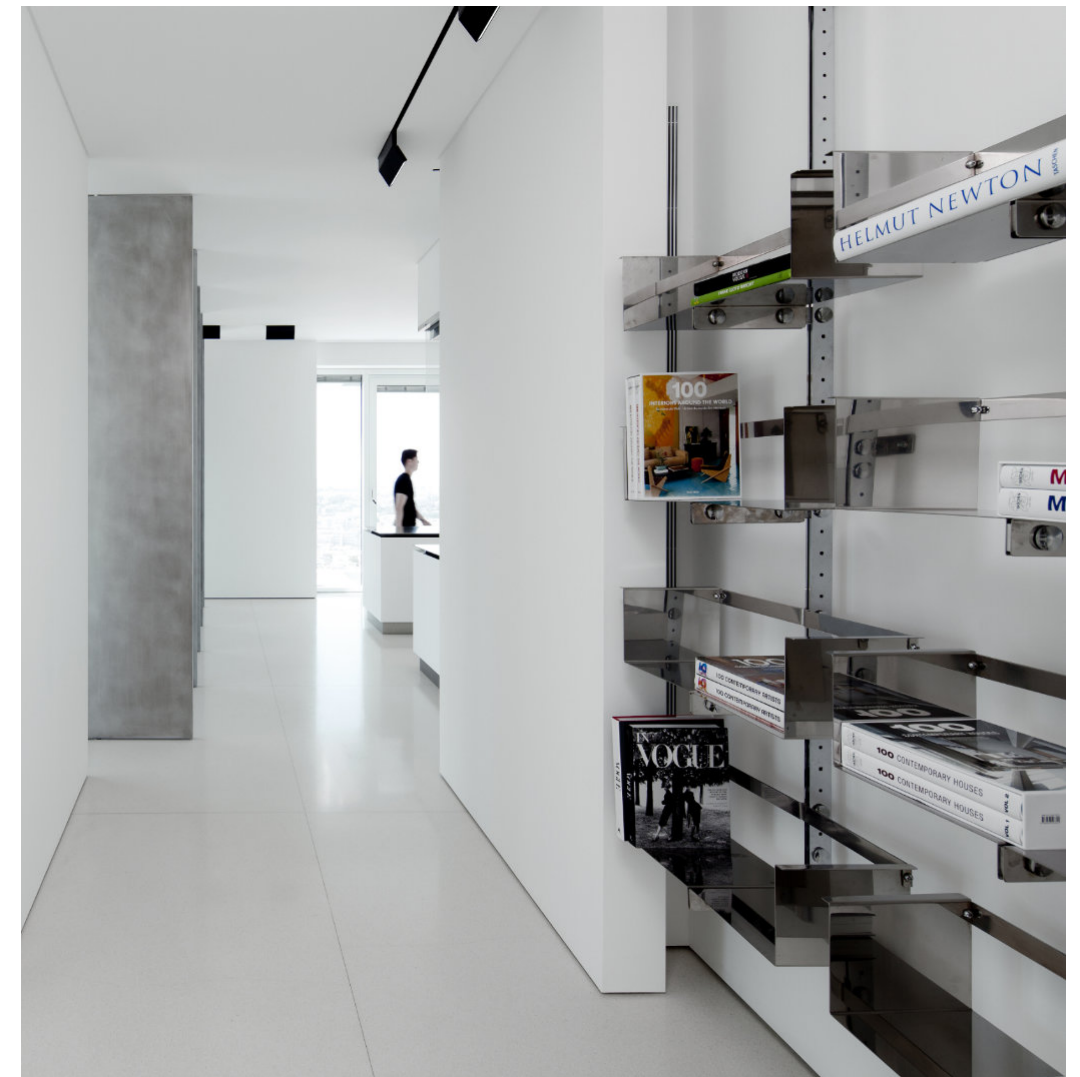

*knick & *knick monopoint / GR-apartment - architect Pitsou Kedem (Ran Broides) - photography by Amit Geron



CRAFT & CONCEPT



CRAFT & CONCEPT





°in / villa Beverly Hills - architects: Domaen - photograph by Paul Vu



°turn / apartment, Israel - architect Pitsuo Kedem - ST-OR - lighting design Orly Avron - photograph by Amit Geron





°online / Villa V, Belgium - architect Francisca Hautekeete - photograph by Annick Vernimmen



°turn / Villa, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)






°knick °out °in / Glass Villa, Israel, design by Moos & Co, NY



°in / Glass Villa, Israel, design by Moos & Co, NY

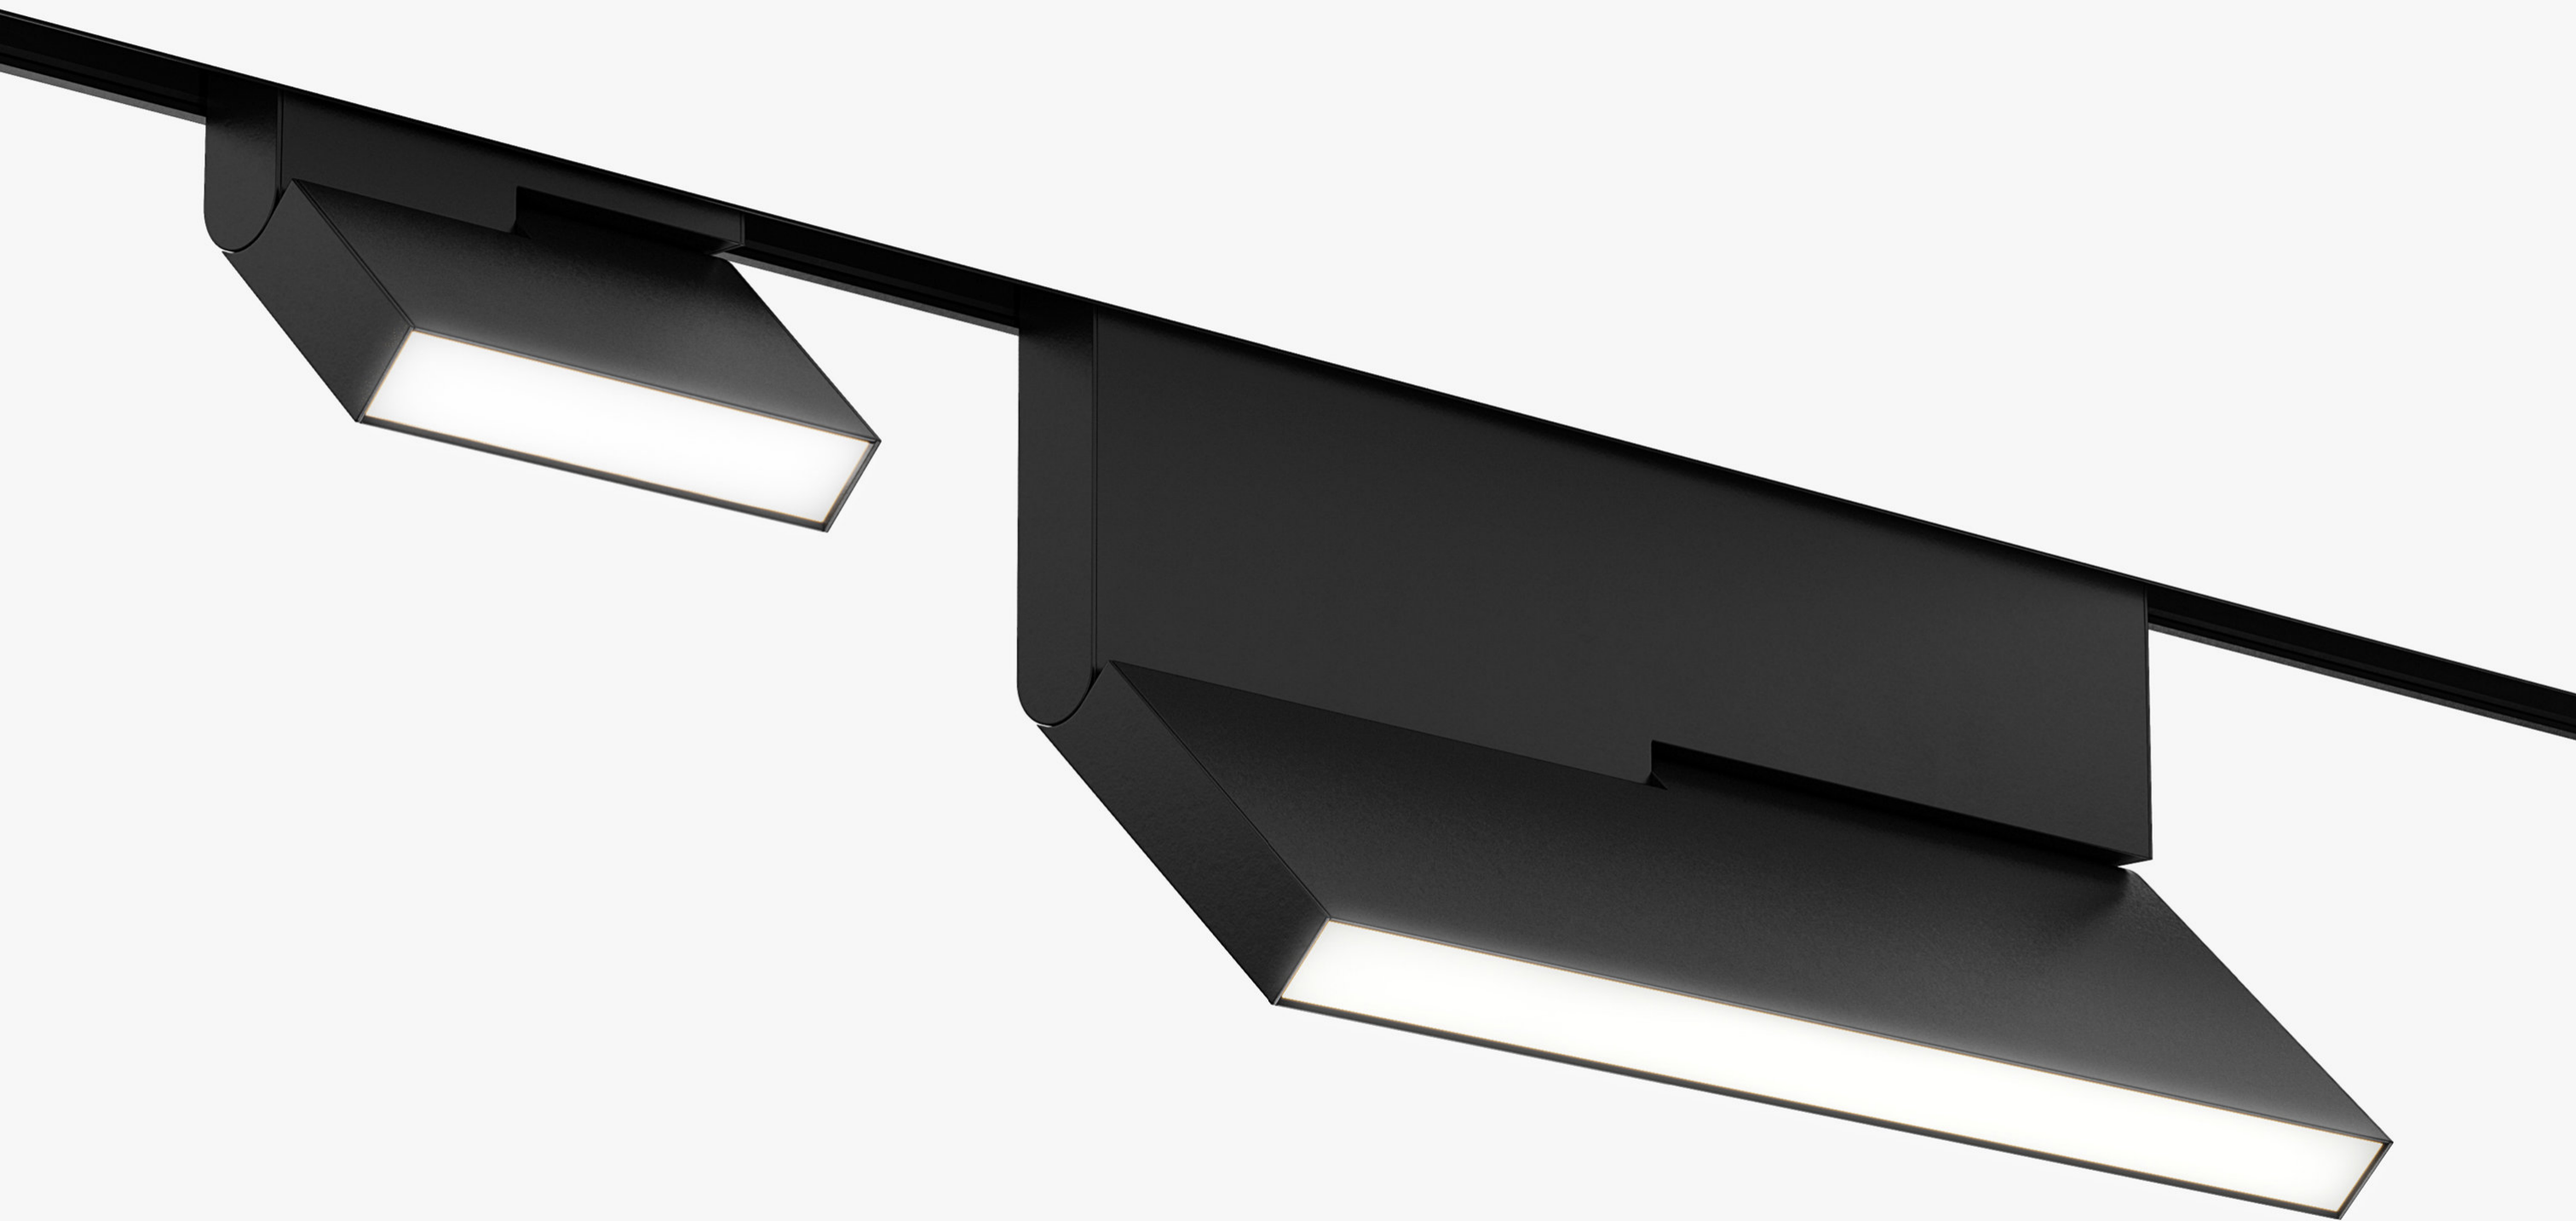



*knick / Penthouse, Ukraine - architect NOTT Design Studio (Sergey Gotvyansky, Mikhail Temnikov)



*out monopoint with plasterkit / Beach house Knokke - architect Glenn Reynaert - photograph by Hendrik Biegis



°in monopoint with plasterkit

°on line



°knick monopoint with plasterkit



*turn / galerie Kamel Mennour, Paris - architect Pierre Yovanovitch - lighting design Dominique Liners (ETOILES)
photograph by Jean-François Jausaud - Luxproductions



*in & *turn / Gert Robijns - Reset Home, centre for contemporary art




° knick



°dot monopoint with plasterkit



*knick / Industrial loft, Russia - architect Denis Krasikov, Cartelle Design

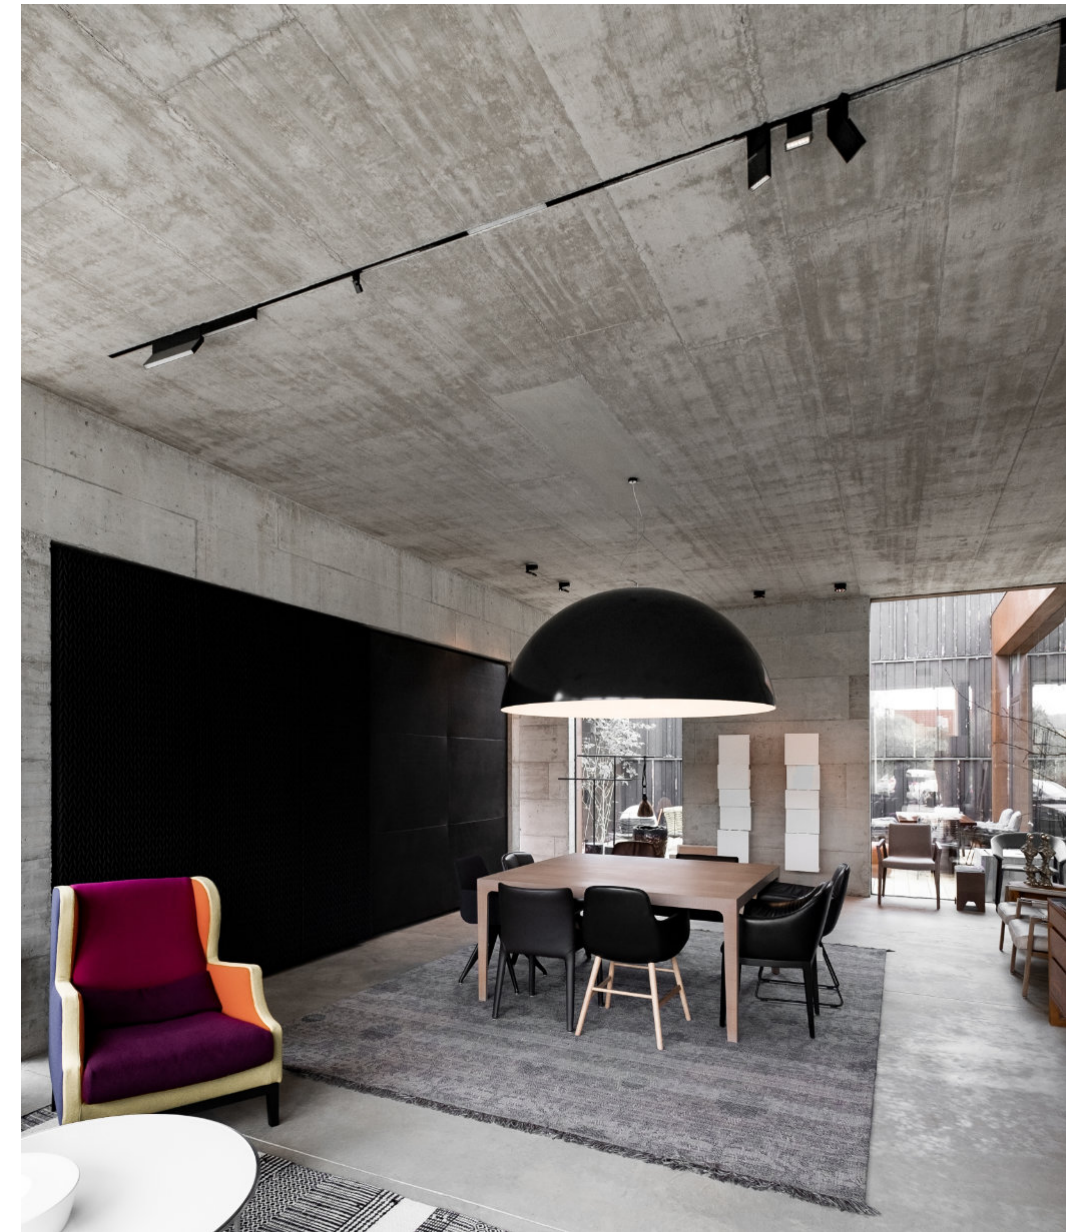

Möbelbau Breithaler showroom - Austria



°out / Church Genk, Belgium - architect PCP Architects - photograph by Philippe van Gelooven




°online suspended track / Design Museum Gent, Belgium - photograph by Beeldpunt

line.s


material aluminum
voltage 48Vdc
circuits 1 circuit: 1x15A + databus
2 circuits: 2 x 15A
dimming DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa

IP20    

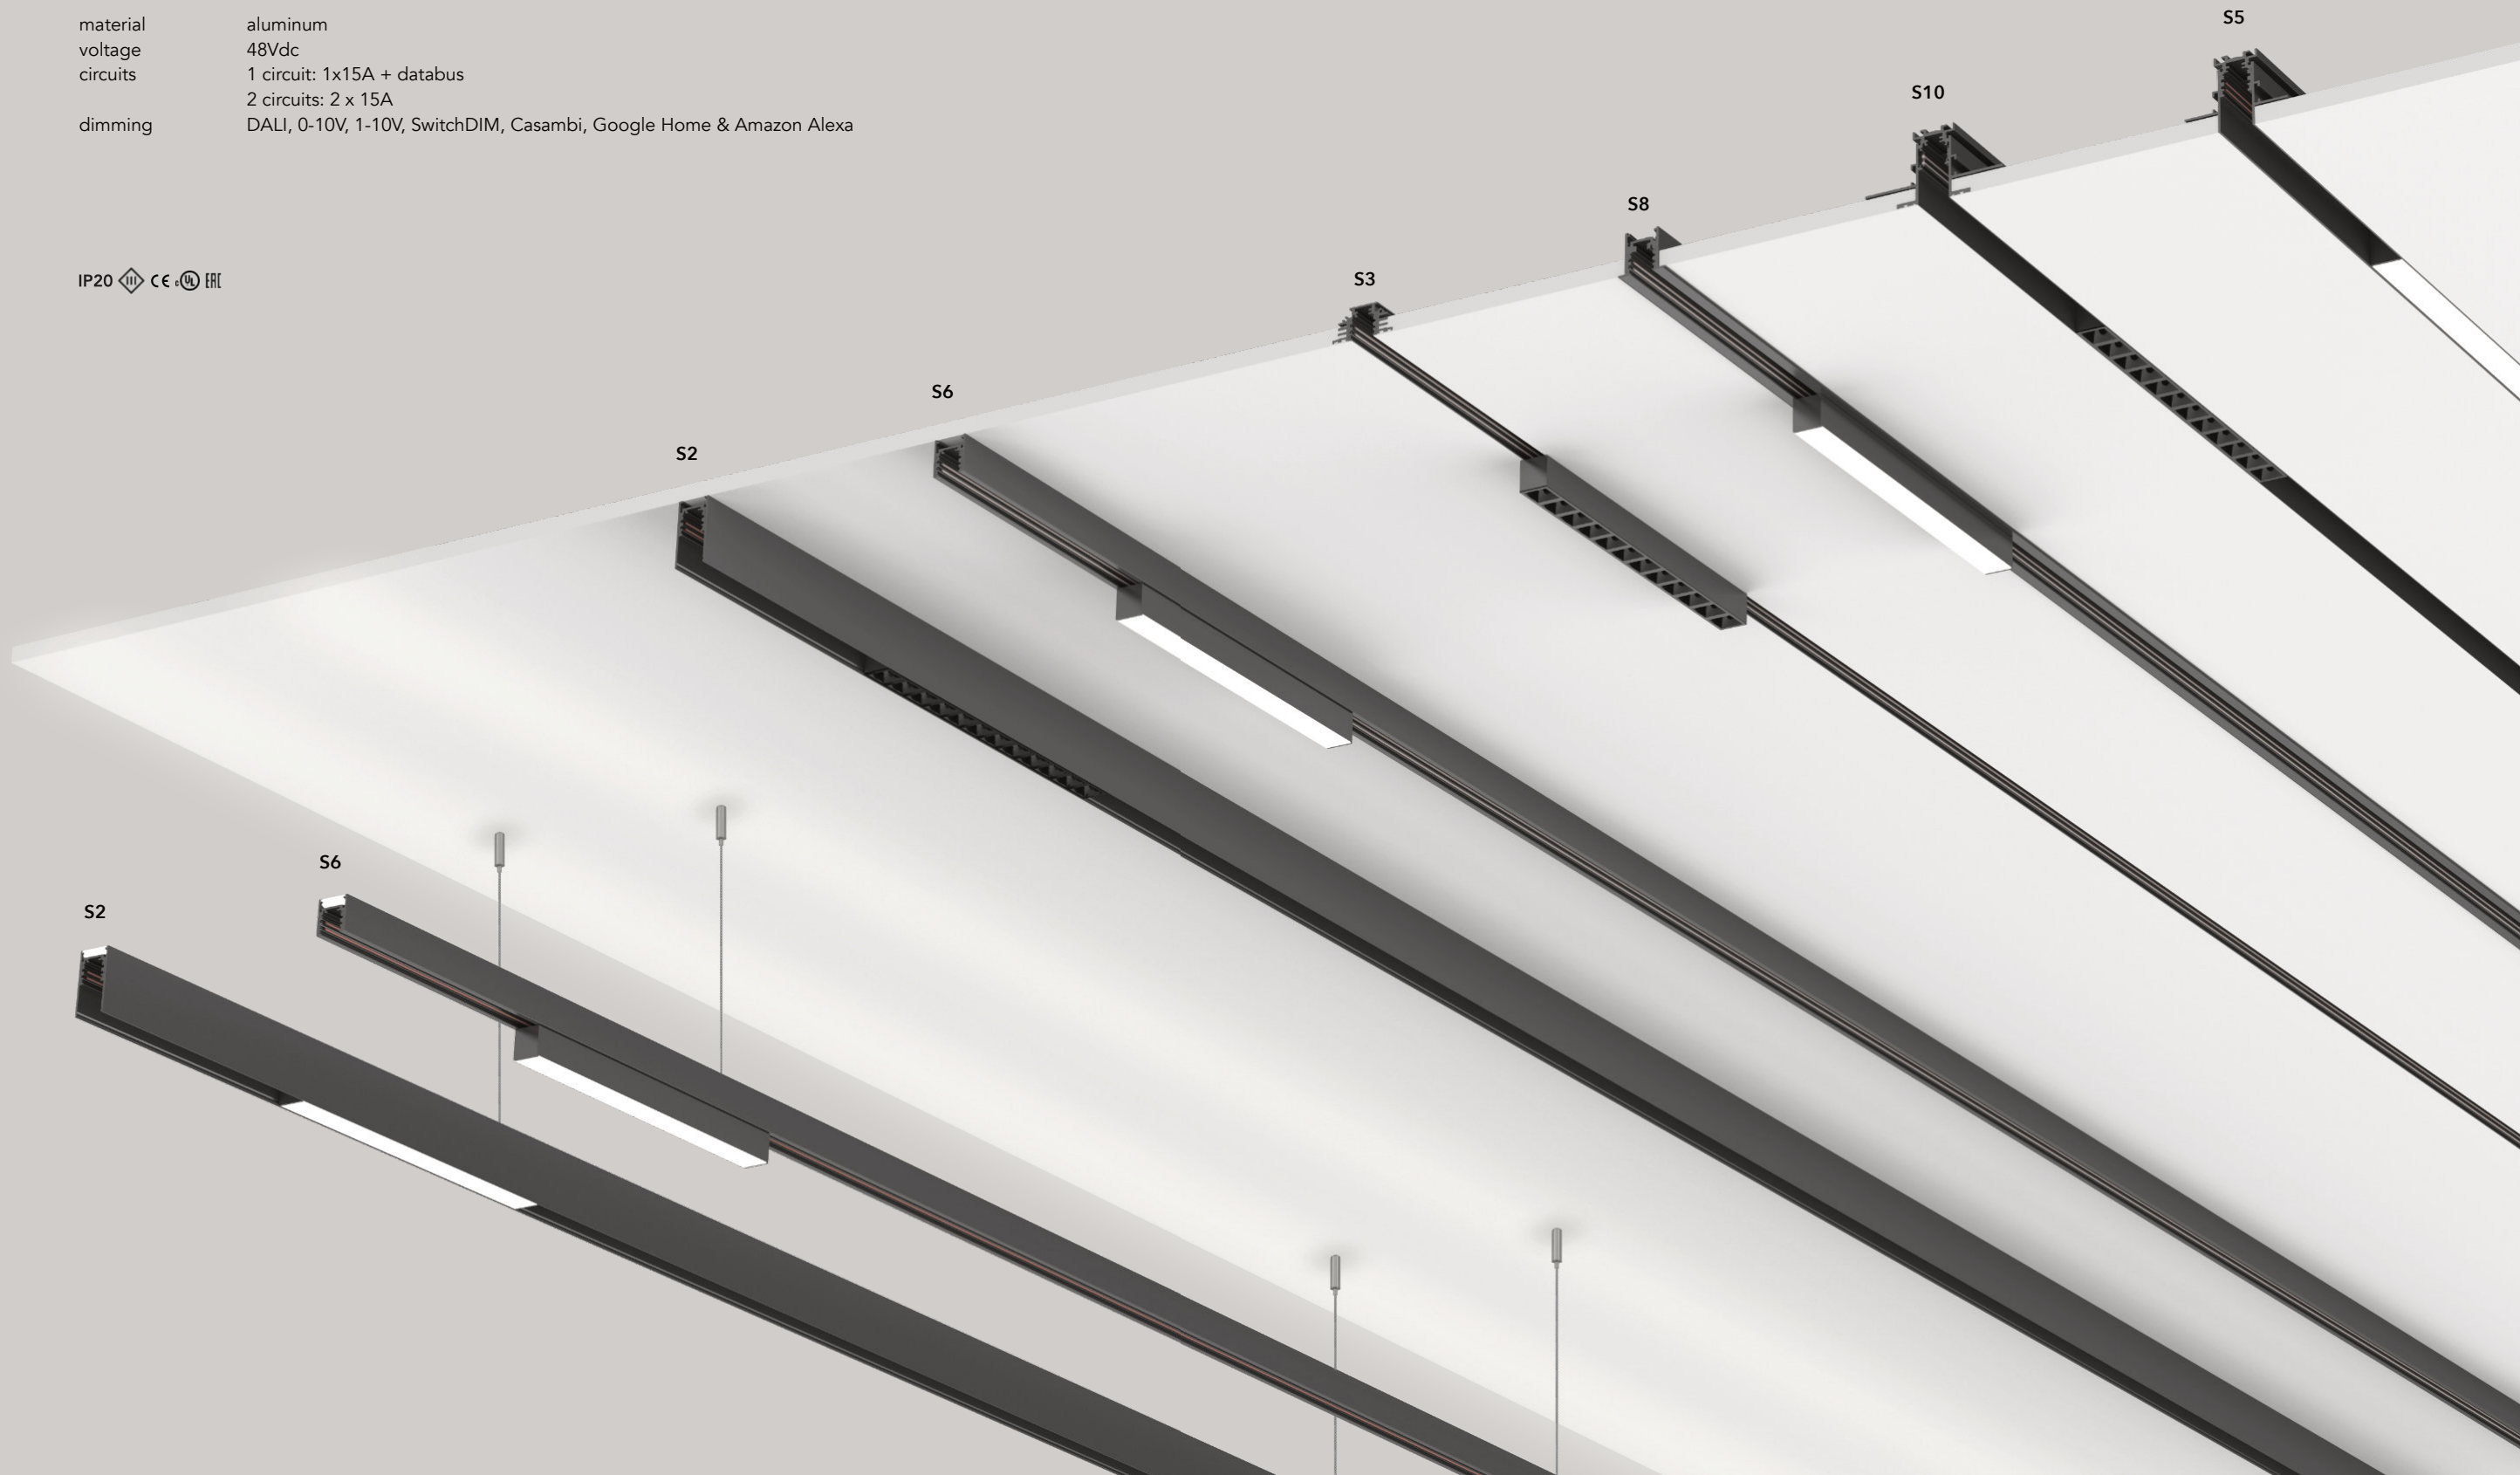


line.s


Surface mount

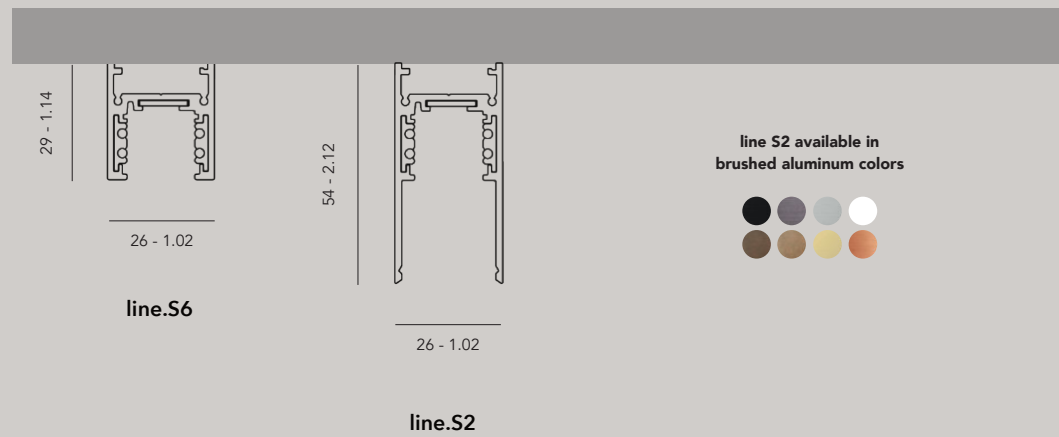

Pendant

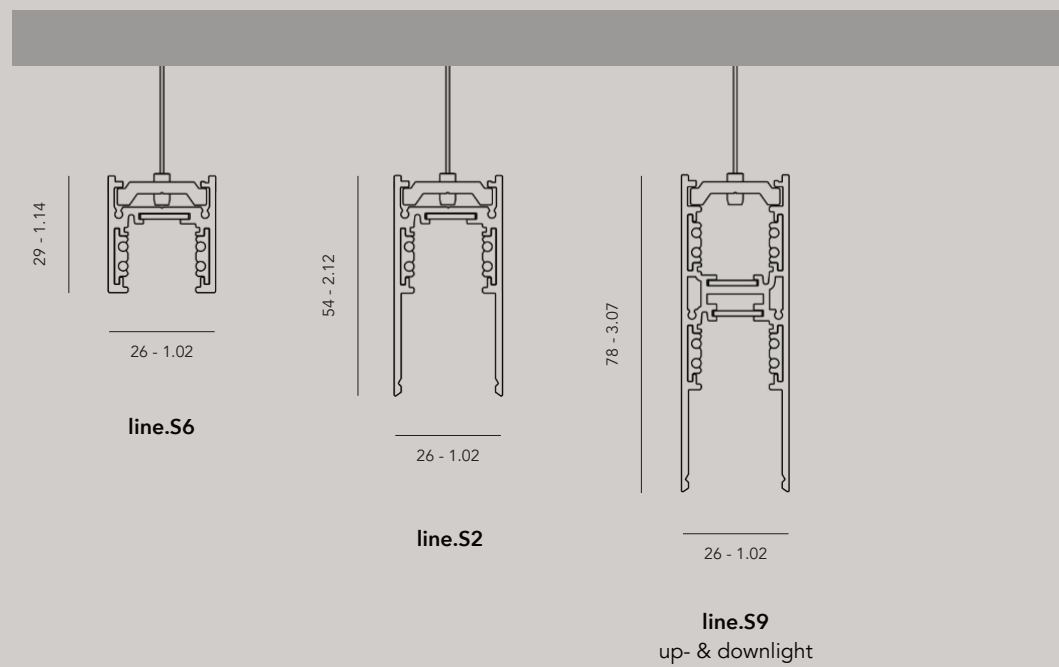

Recessed

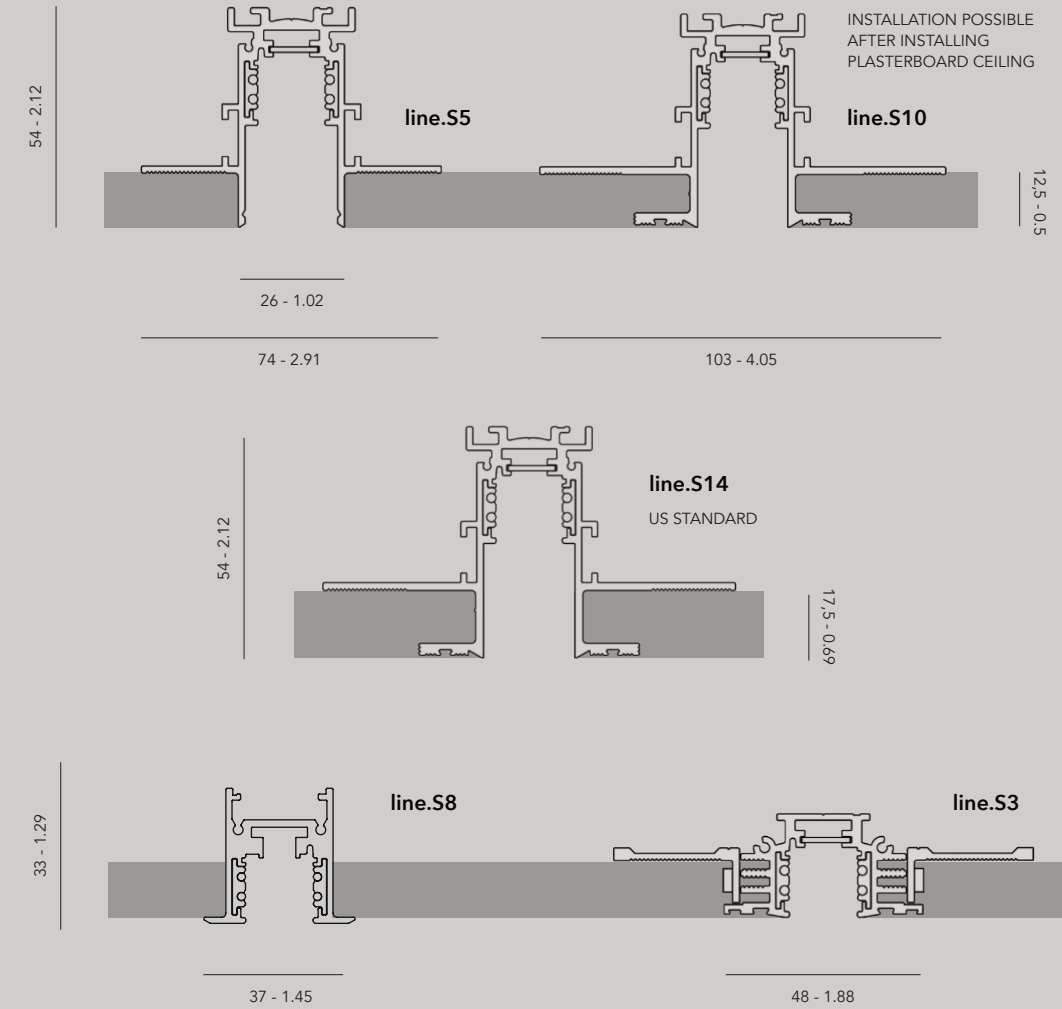

Order Code

- 10002.AA00.BBBB line.S2
- 10003.AA00.BBBB line.S3
- 10005.AA00.BBBB line.S5
- 10006.AA00.BBBB line.S6
- 10008.AA00.BBBB line.S8
- 10009.AA00.BBBB line.S9 pendant
- 10010.AA00.BBBB line.S10
- 10014.AA00.BBBB line.S14
- 10052.AA00.BBBB line.S2 pendant
- 10056.AA00.BBBB line.S6 pendant
- 10062.AA00.BBBB line.S2 pendant uplight

AA Finish


- 01 black
- 02 white
- 22 aluminum brushed (only S2)
- 23 brass alu brushed (only S2)
- 25 bronze alu brushed (only S2)
- 26 dark bronze alu brushed (only S2)

BBBB Length


- 0300 300 mm
- 0500 500 mm
- 1000 1000 mm
- 2000 2000 mm
- 3000 3000 mm
- xxxx xxxx mm (custom length)

track set-up & accessories

LINE.S10

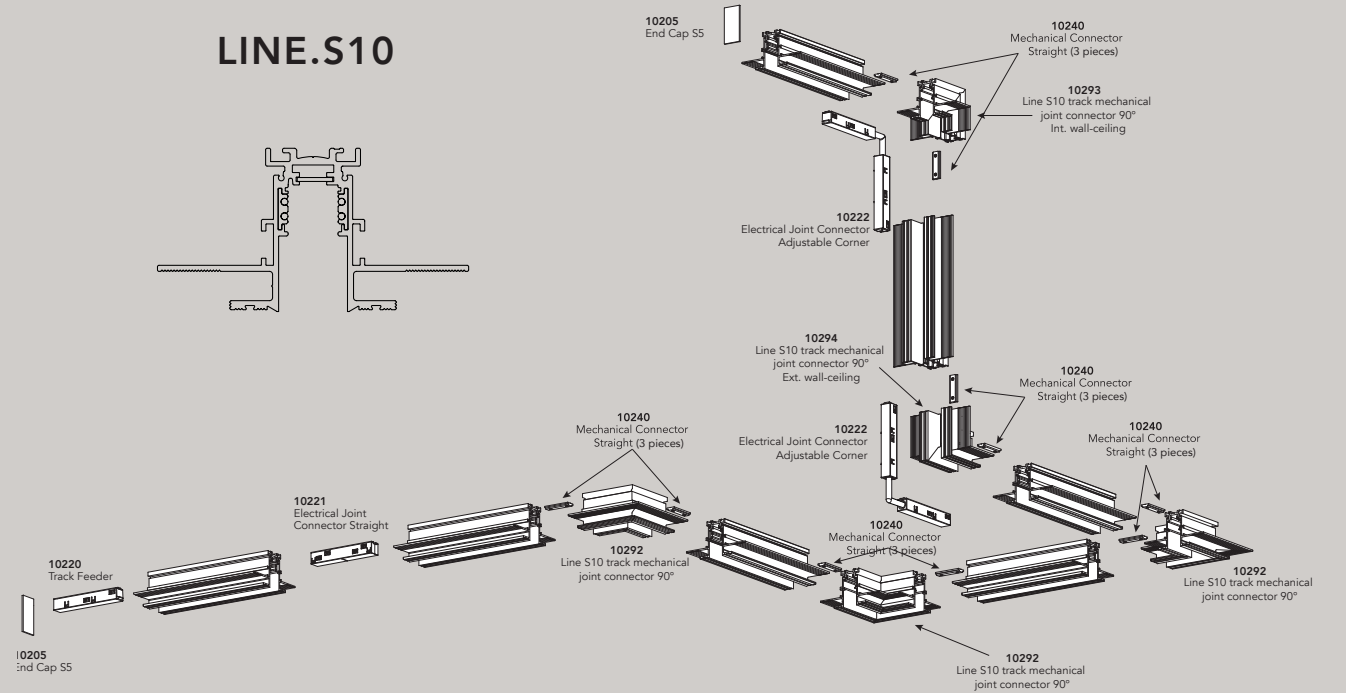


LINE.S5

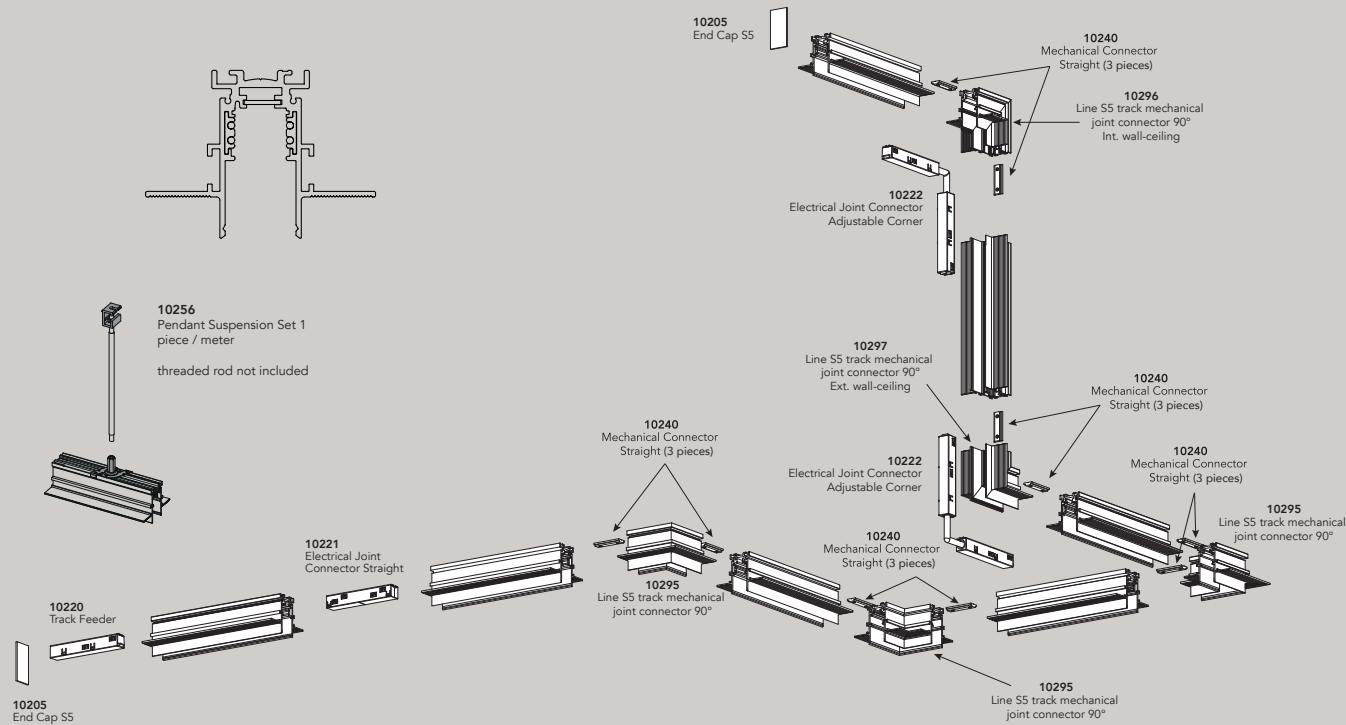


LINE.S14


US VERSION

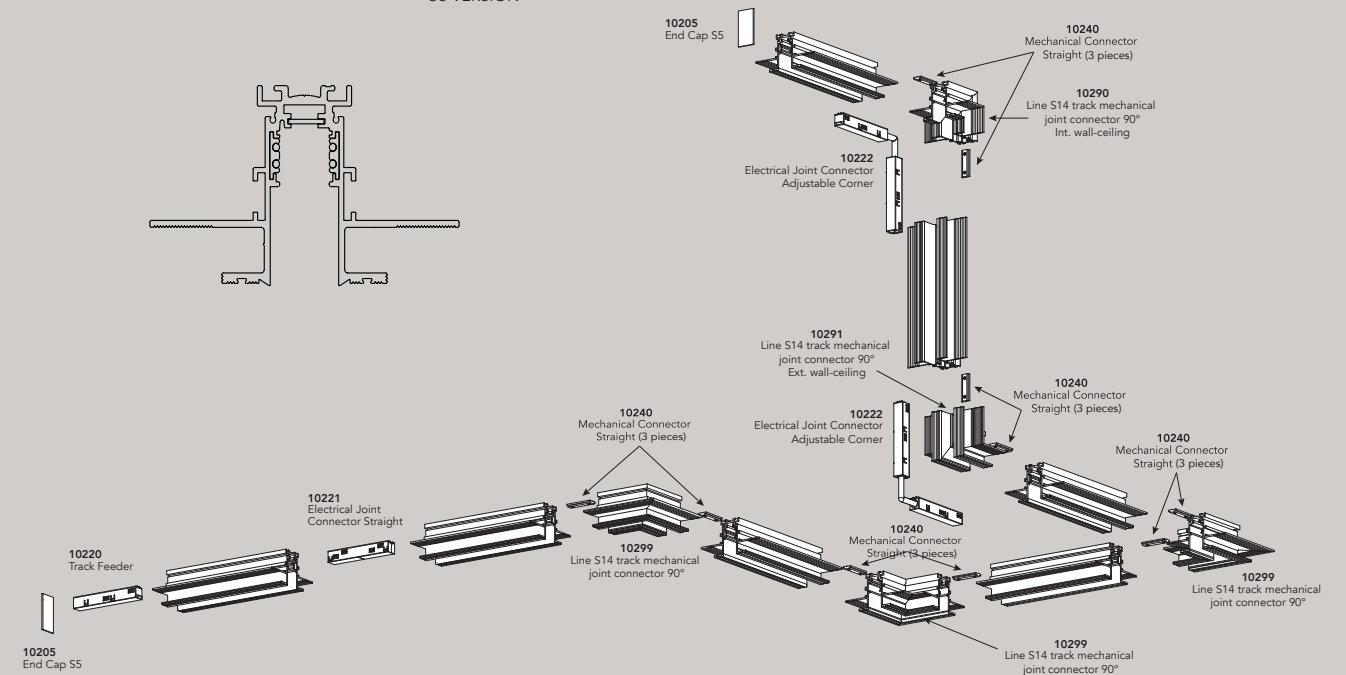

LINE.S2


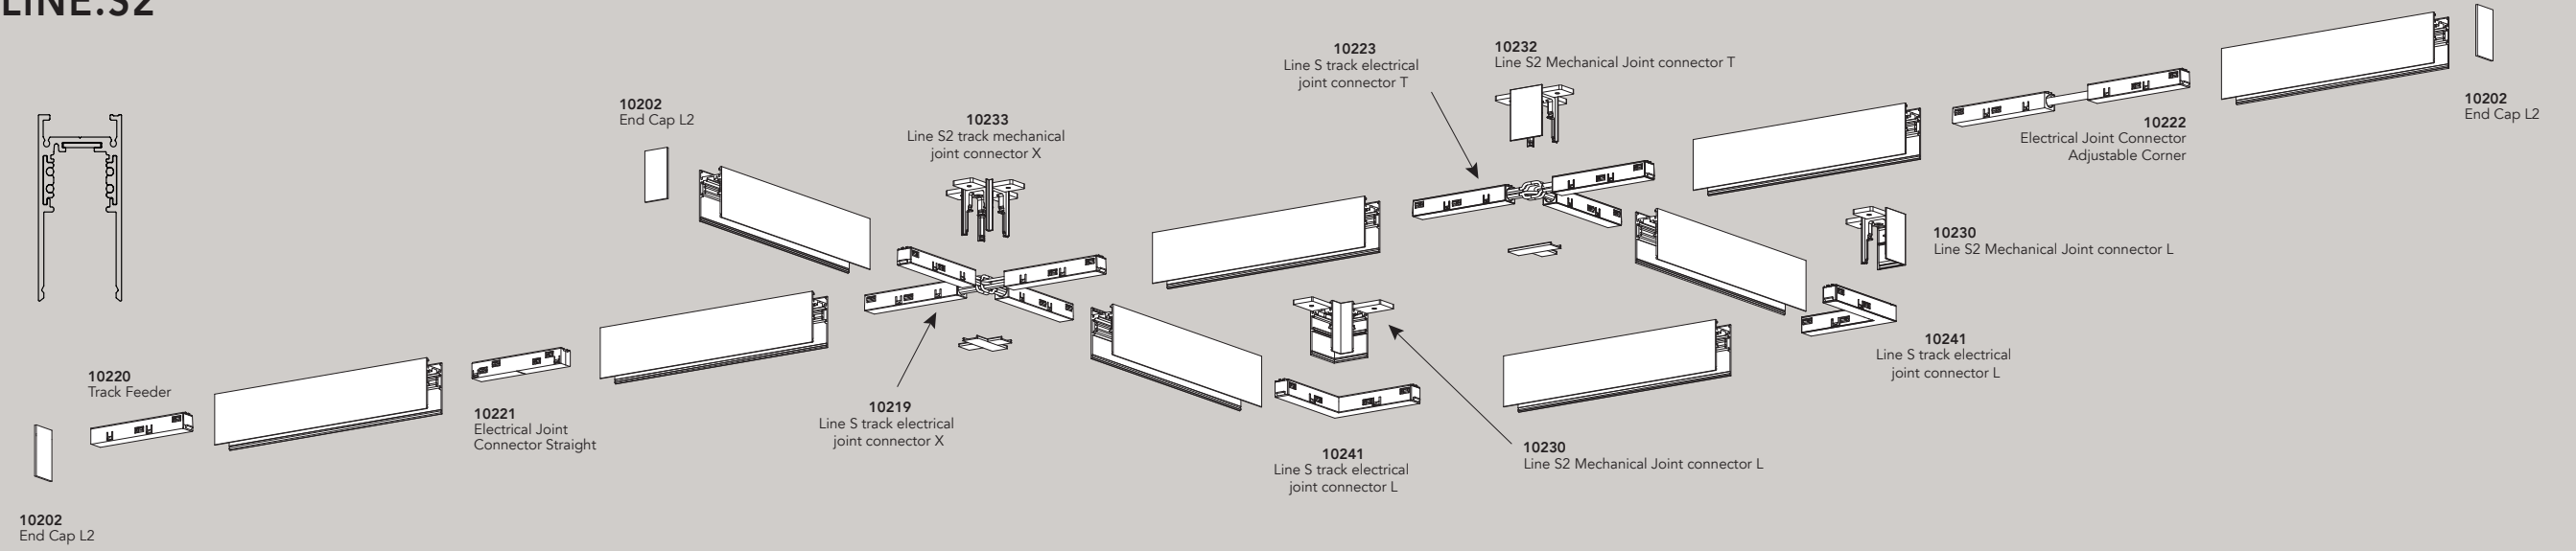


LINE.S6

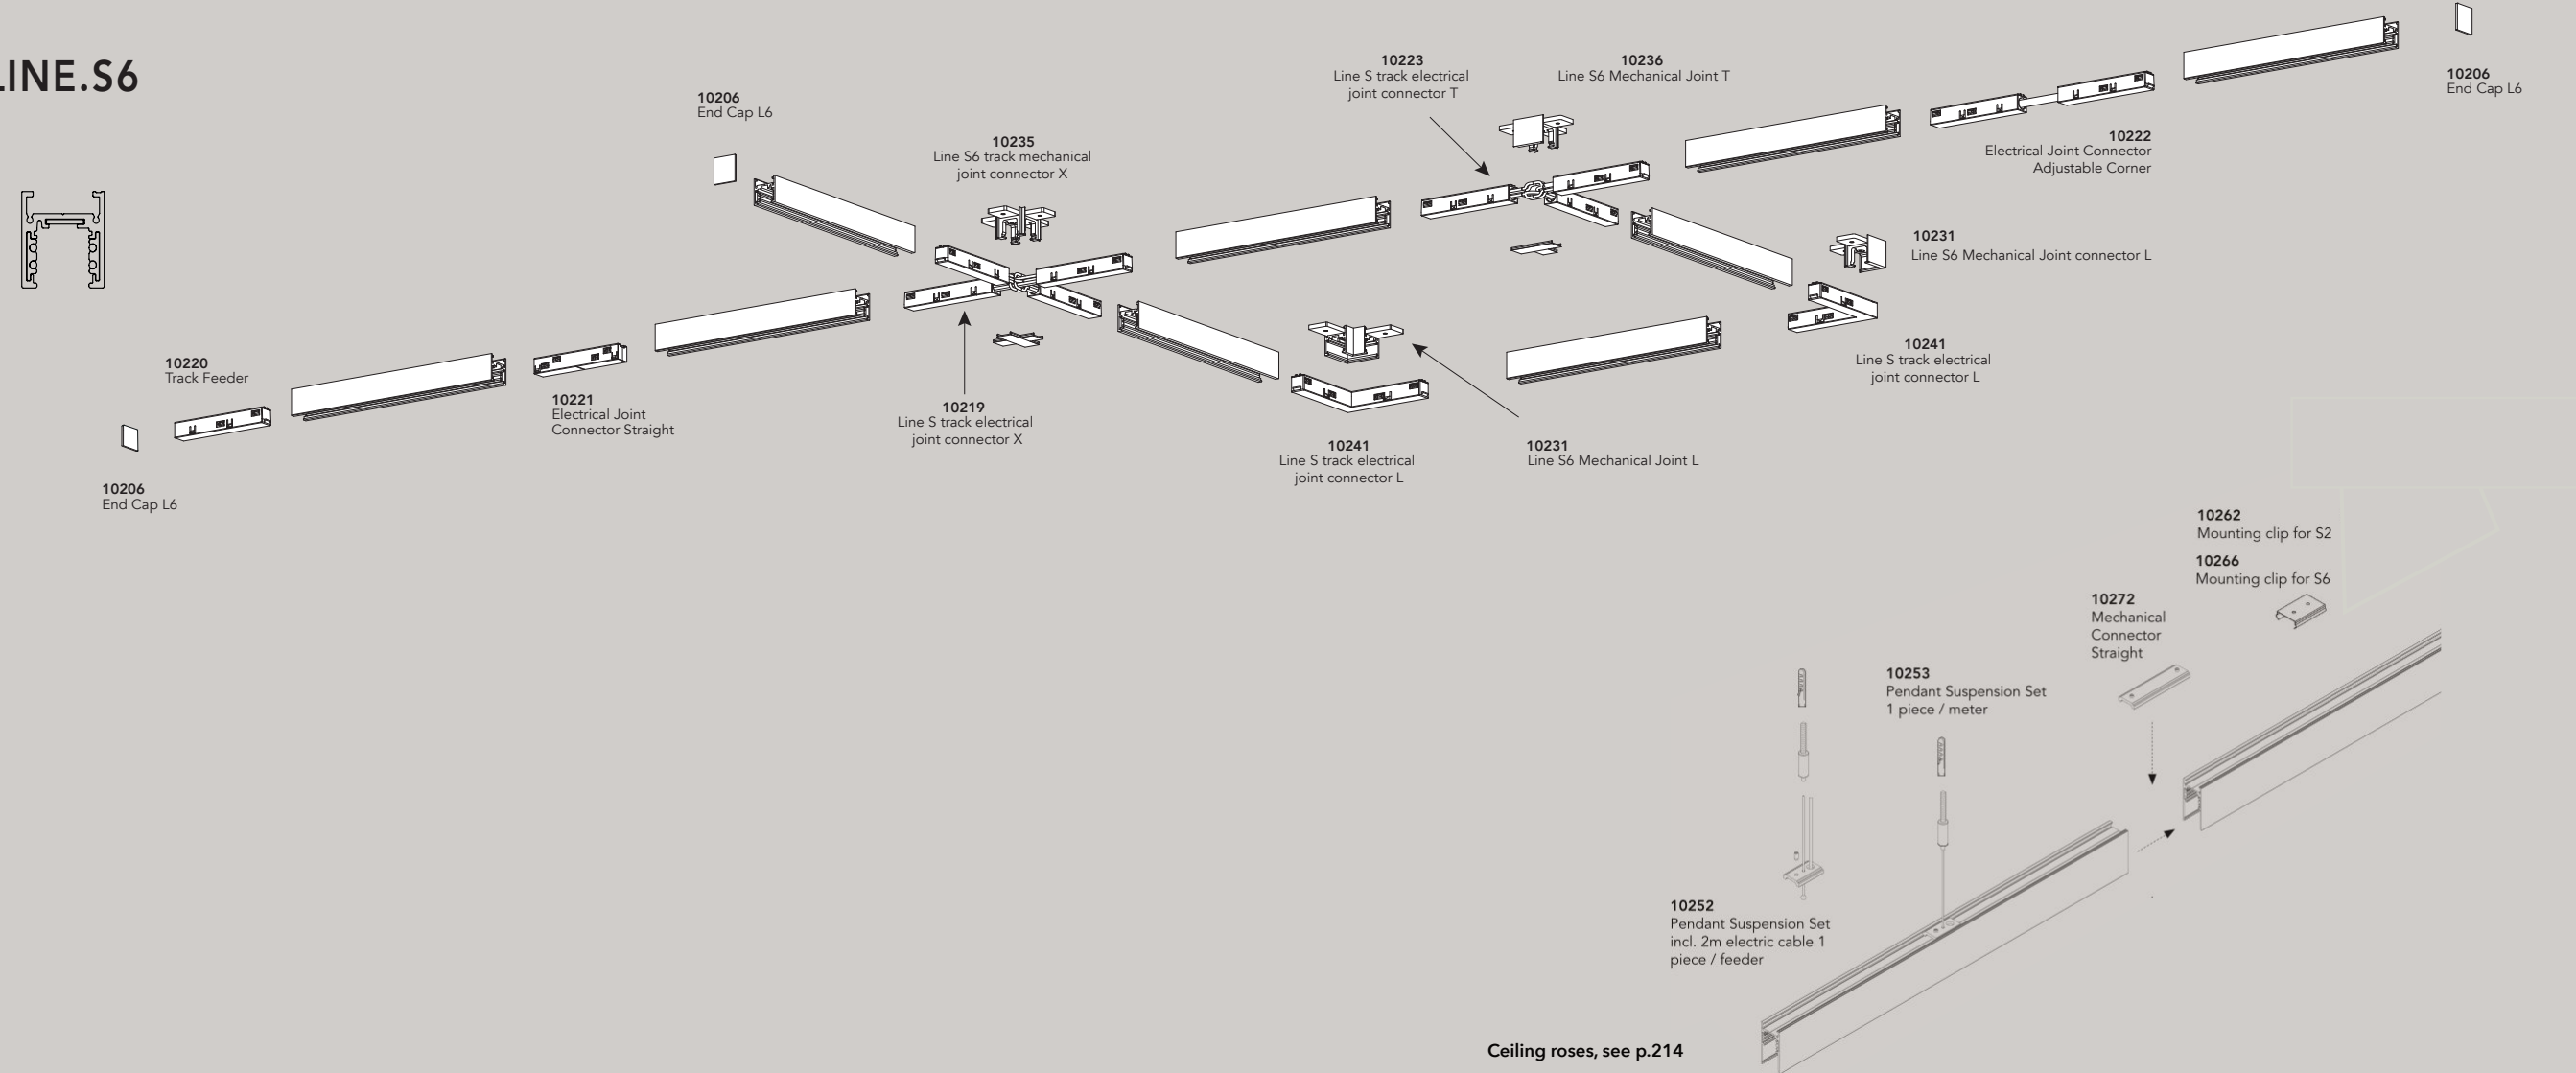


Ceiling roses, see p.214


LINE.S8



10220 Track Feeder





10221 Electrical Joint Connector Straight



10234 Mechanical Joint Connector L





10241 Line S track electrical joint connector L

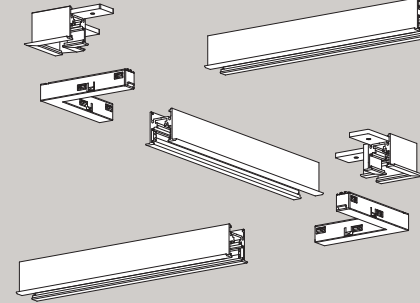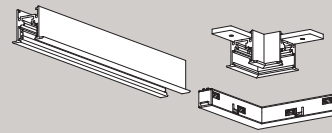

10222 Electrical Joint Connector Adjustable Corner

10260 Mounting Bracket

LINE.S3

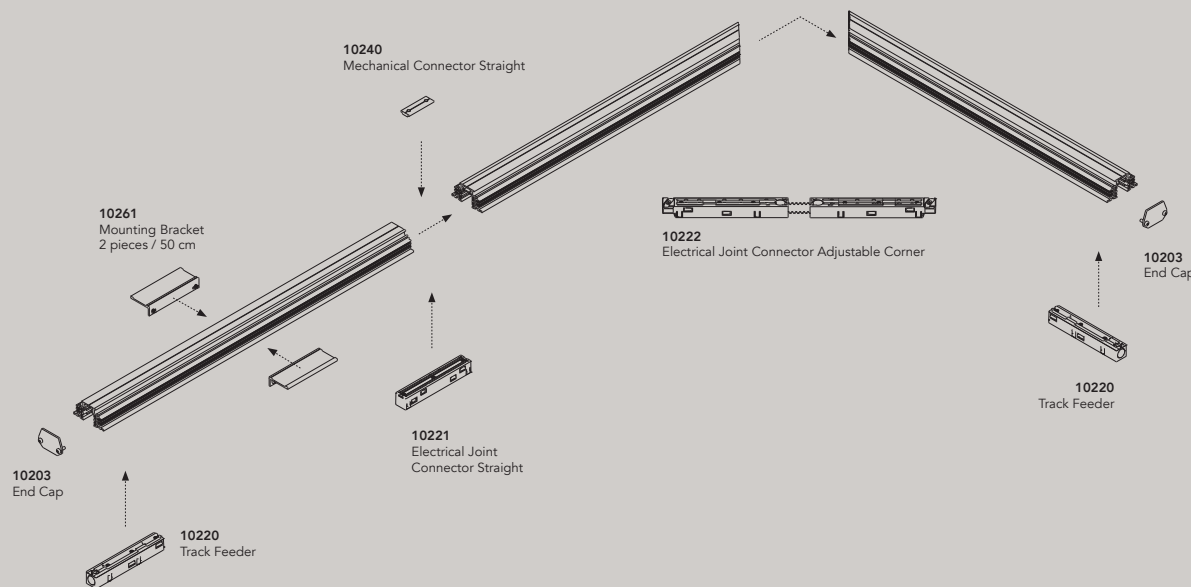

10240 Mechanical Connector Straight

10261 Mounting Bracket 2 pieces / 50 cm

10222 Electrical Joint Connector Adjustable Corner

10203 End Cap

10220 Track Feeder

10221 Electrical Joint Connector Straight

10203 End Cap

10220 Track Feeder

48V Power supplies & controls

Order Code

remote

- 90101.0000 Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90102.0000 Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90103.0000 Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
- 90104.0000 Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified

- 90110.0000 Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
- 90111.0000 Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed

- 90001.0000 0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
- 90002.0000 Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
- 90003.0000 Dali opto insulator for galvanic isolation

on track

- 90112.0100 Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE only for track Line S (all tracks) - black
- 90113.0100 Power supply, 48VDC, 250W - 220-240VAC/50-60Hz CE only for track Line S2, S5 & S10 - black
- 90112.0200 Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE only for track Line S (all tracks) - white
- 90113.0200 Power supply, 48VDC, 250W - 220-240VAC/50-60Hz CE only for track Line S2, S5 & S10 - white

90112





90113



°knick

materials aluminum / PC
 weight 1070gr / 2.35-lb
 voltage 48 Vdc
 wattage 8,2W - 16,8W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20 IP20 CE ENEC ENEC

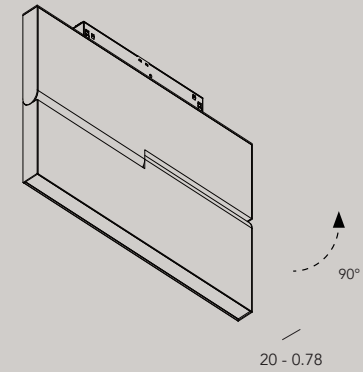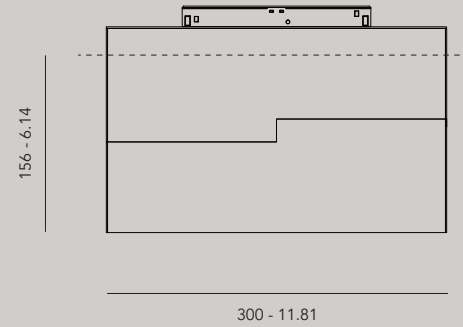

Order Code

- 10500.AA00.BBBB.CCC.DD knick
- 10501.AA00.BBBB.CCC.DD knick high output
- 10503.AA00.BBBB.CCC.DD knick monopoint
- 10504.AA00.BBBB.CCC.DD knick monopoint high output

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request


CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd

- DD Dimming** see 48V controls
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)
 - CA casambi control

Accessories



- 10101 line S plasterkit knick/out

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

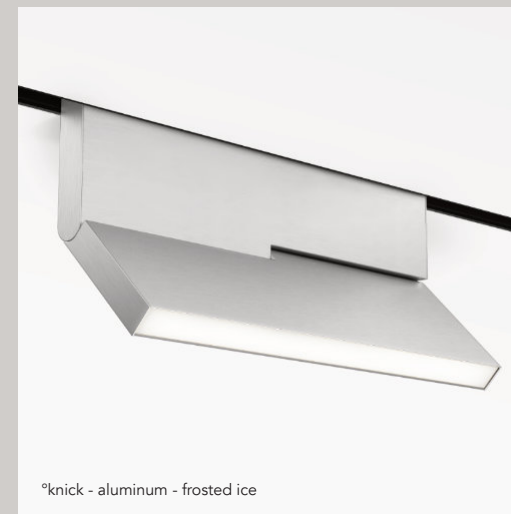

°knick medium

materials aluminum / PC
 weight 718 gr / 1.58 lb
 voltage 48 Vdc
 wattage 19W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

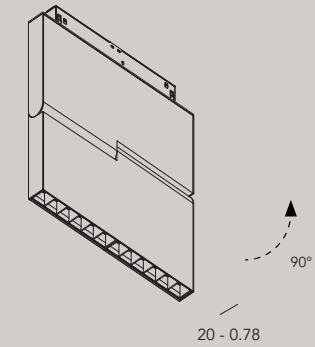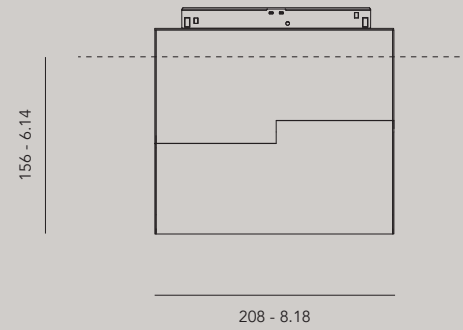

IP20



Order Code

10510.AA00.BBBB.CCC.DD knick medium
 10513.AA00.BBBB.CCC.DD knick medium monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
255	25° black glossy louvre	1800 lm
355	35° black glossy louvre	1800 lm
108	10° white glossy louvre	1800 lm
258	25° white glossy louvre	1800 lm
358	35° white glossy louvre	1800 lm

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories



10113 line S plasterkit knick m & out m

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

knick small

materials aluminum / PC
 weight 260gr / 0.57lb
 voltage 48 Vdc
 wattage 9,6 W
 ugr louvre <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20 CE ENEC ENEC

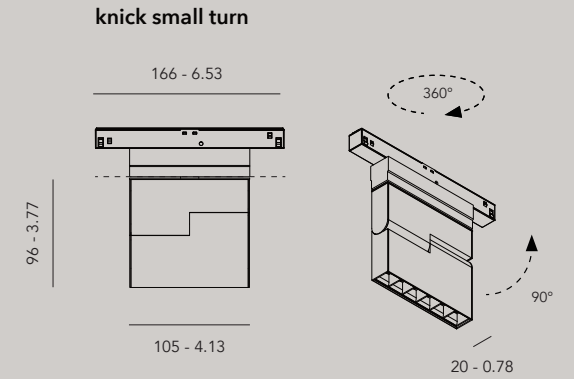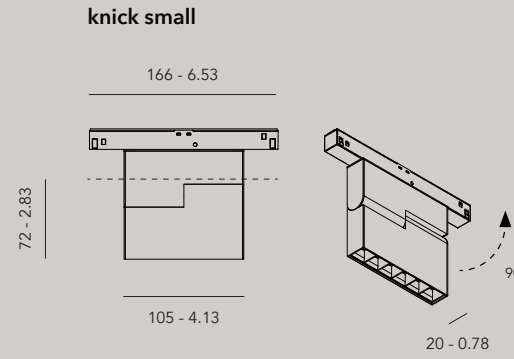

Order Code

- 10600.AA00.BBBB.CCC.DD** knick small
- 10603.AA00.BBBB.CCC.DD** knick small monopoint
- 10610.AA00.BBBB.CCC.DD** knick small turn
- 10613.AA00.BBBB.CCC.DD** knick small turn monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
001	frosted ice	500lm - 220cd
002	microprism	550lm - 330cd
105	10° black glossy louvre	895lm - 18340cd
255	25° black glossy louvre	895lm - 18340cd
355	35° black glossy louvre	895lm - 18340cd
108	10° white glossy louvre	895lm - 18340cd
258	25° white glossy louvre	895lm - 18340cd
358	35° white glossy louvre	895lm - 18340cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories

- 10102 line S plasterkit knick small (turn)

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.






°knick small - dark bronze brushed - black glossy louvre



°knick small - brass brushed - black glossy louvre



°knick small - bronze brushed - black glossy louvre

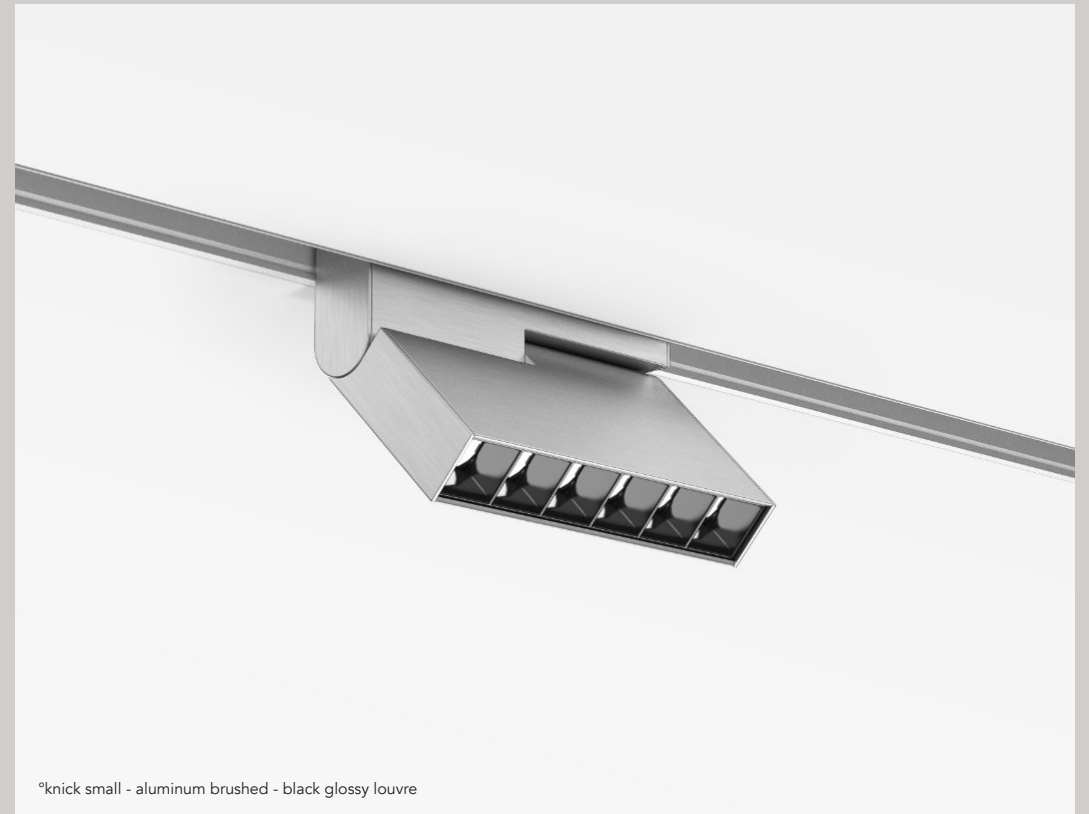






°knick small - aluminum brushed - black glossy louvre



°in

materials aluminum / PC
weight 175gr - 0,38lb for 286 mm
voltage 48 Vdc
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi


IP20    ENEC

Length
mm - inch

1144 - 45.03		20 - 0.78
858 - 33.77		
572 - 22.51		
286 - 11.25		
143 - 5.62		

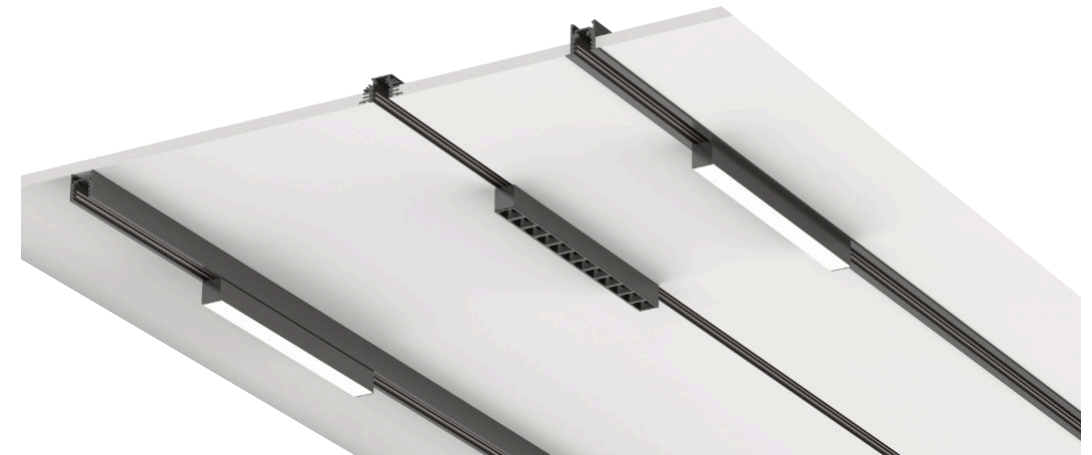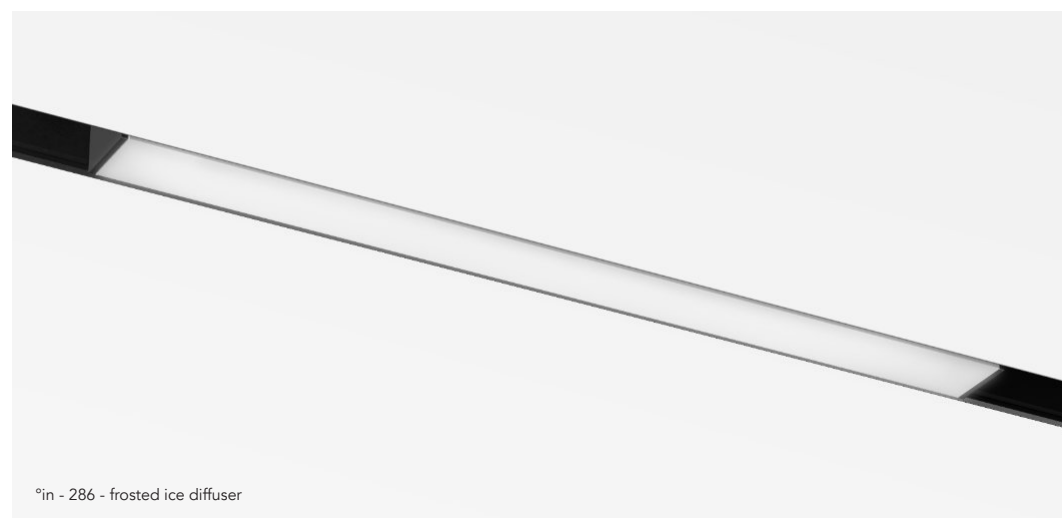

length (mm)	beam °	color K	CRI ra	candela cd	lumen lm	power W	efficacy lm/W	glare UGR
frosted ice								
143	106	3000	95	125	342,5	4,1	84	<30
286	106	3000	95	250	685	8,2	84	<30
572	106	3000	95	500	1370	16,4	84	<30
858	106	3000	95	750	2055	24,6	84	<30
1144	106	3000	95	1000	2740	32,8	84	<30
microprism								
143	90	3000	95	200	425	4,1	104	<30
286	90	3000	95	400	850	8,2	104	<30
572	90	3000	95	800	1700	16,4	104	<30
858	90	3000	95	1200	2550	24,6	104	<30
1144	90	3000	95	1600	3400	32,8	104	<30
frosted ice high output								
143	106	3000	95	248	700	8,4	83	<31
286	106	3000	95	496	1400	16,8	83	<31
microprism high output								
143	90	3000	95	420	910	8,4	108	<31
286	90	3000	95	840	1820	16,8	108	<31
spot								
143	20	3000	>95	2210	390	6,2	63	<11
286	20	3000	>95	4350	850	13	65	<11
572	20	3000	>95	8700	1700	26	65	<11
858	20	3000	>95	13050	2550	39	65	<11
1144	20	3000	>95	17400	3400	52	65	<11
143	35	3000	>95	890	400	6,2	65	<15
286	35	3000	>95	2040	880	13	68	<15
572	35	3000	>95	4080	1760	26	68	<15
858	35	3000	>95	6120	2640	39	68	<15
1144	35	3000	>95	8160	3520	52	68	<15
143	60	3000	>95	510	340	6,2	55	<16
286	60	3000	>95	790	750	13	58	<16
572	60	3000	>95	1580	1500	26	58	<16
858	60	3000	>95	2370	2250	39	58	<16
1144	60	3000	>95	3160	3000	52	58	<16
spot high output								
143	20	3000	>95	3100	595	9	66	<11
286	20	3000	>95	6200	1190	18	66	<11
143	35	3000	>95	1420	550	9	61	<15
286	35	3000	>95	2840	1100	18	61	<15
143	60	3000	>95	735	550	9	61	<16
286	60	3000	>95	1470	1100	18	61	<16

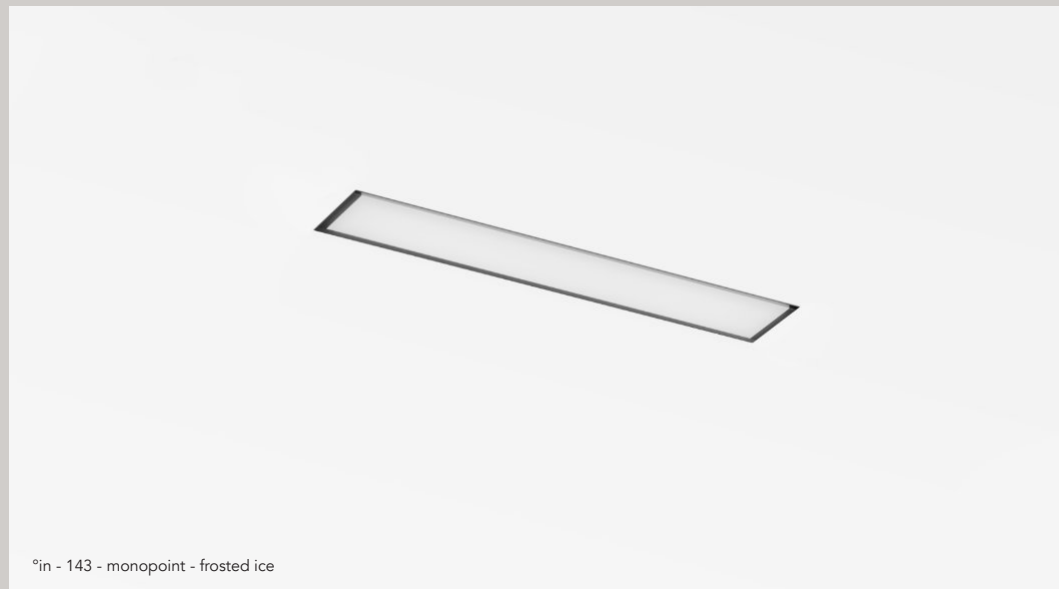

Order Code

- 10701.AA00.BBBB.CCC.DD in 143 mm
- 10702.AA00.BBBB.CCC.DD in 143 mm high output
- 10703.AA00.BBBB.CCC.DD in 143 mm monopoint
- 10704.AA00.BBBB.CCC.DD in 143 mm monopoint high output
- 10711.AA00.BBBB.CCC.DD in 286 mm
- 10712.AA00.BBBB.CCC.DD in 286 mm high output
- 10713.AA00.BBBB.CCC.DD in 286 mm monopoint
- 10714.AA00.BBBB.CCC.DD in 286 mm monopoint high output
- 10721.AA00.BBBB.CCC.DD in 572 mm
- 10723.AA00.BBBB.CCC.DD in 572 mm monopoint
- 10731.AA00.BBBB.CCC.DD in 858 mm
- 10741.AA00.BBBB.CCC.DD in 1144 mm

Other lengths on request (a multiple of 286 mm)

AA Finish

- 01 black
- 02 white

BBBB Light

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K
- 9540 cri >95, 4000K - on request
- 90TW cri >90, tunable white - on request only for frosted ice & microprism

CCC Optic

- 001 frosted ice
- 002 microprism
- 205 20° **black glossy** louvre
- 355 35° black glossy louvre
- 605 60° black glossy louvre
- 206 20° **black matt** louvre
- 356 35° black matt louvre
- 606 60° black matt louvre
- 207 20° **white matt** louvre
- 357 35° white matt louvre
- 607 60° white matt louvre

DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)
- CA casambi control

Accessories

- 10108 line S plasterkit in 143 mm
- 10109 line S plasterkit in 286 mm
- 10110 line S plasterkit in 572 mm

oin for S3, S6 & S8

materials	aluminum / PC
weight	51gr - 300 mm / 85-128-170gr
voltage	48 Vdc
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi
ugr	<19

IP20    ENEC



Order Code

10715.AA00.BBBB.CCC.DD in 300 mm

AA	Finish
01	black
02	white
BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
CCC	Optic
350	35° (lens) - 290lm - 5W
600	60° (reflector) - 300lm - 5W
DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Order Code

10716.AA00.BBBB.DD in flat 694 mm - 566lm -9W


10717.AA00.BBBB.DD in flat 1194 mm - 1133lm - 18W

10718.AA00.BBBB.DD in flat 1694 mm -1700lm - 26W

AA	Finish
01	black
02	white
BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

°turn

materials aluminum / PC
 weight 400gr / 0.88lb
 voltage 48 Vdc
 wattage 9,6 W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

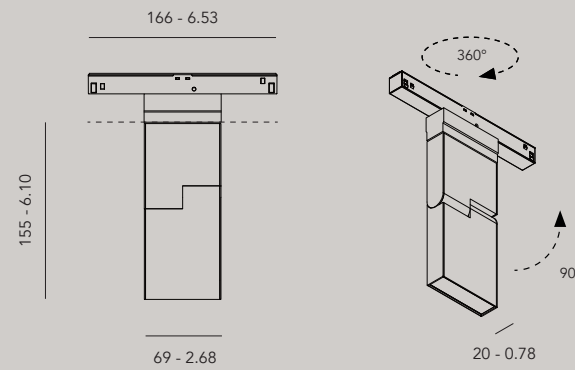

IP20



Order Code

10800.AA00.BBBB.CCC.DD turn
 10803.AA00.BBBB.CCC.DD turn monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K - on request

CCC	Optic	Output*
001	frosted ice	640lm - 540cd
002	microprism	590lm - 710cd
250	25°	790lm - 2820cd
400	40°	740lm - 1670cd


DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories
 10103 line S plasterkit turn

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°turn plus

materials aluminum / PC
 weight 465gr / 1.02lb
 voltage 48 Vdc
 wattage 13 W
 ugr louvre <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

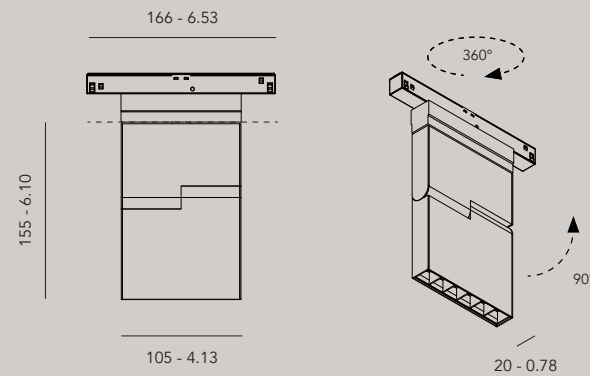

IP20



Order Code

10900.AA00.BBBB.CCC.DD turn plus
10903.AA00.BBBB.CCC.DD turn plus monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
001	frosted ice	720lm - 620cd
002	microprism	810lm - 1080cd
105	10° black glossy louvre	1195lm - 23250cd
255	25° black glossy louvre	880lm - 3330cd
355	35° black glossy louvre	870lm - 2500cd
108	10° white glossy louvre	1195lm - 23250cd
258	25° white glossy louvre	880lm - 3330cd
358	35° white glossy louvre	870lm - 2500cd


DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°dot

materials aluminum / PC
 weight 100gr / 0.22lb
 voltage 48 Vdc
 wattage 2,5 W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

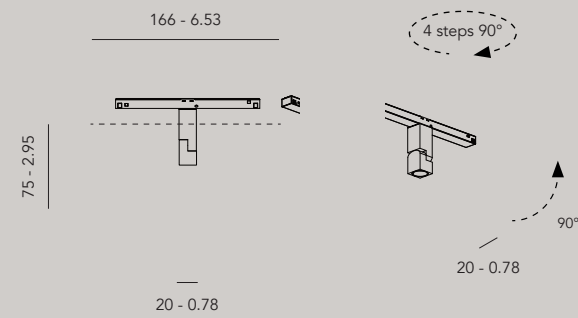

IP20



Order Code

11300.AA00.BBBB.CCC.DD dot
 11303.AA00.BBBB.CCC.DD dot monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K - on request

CCC	Optic	Output*
100	10°	170lm - 2000cd


DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories
 10106 line S plasterkit dot

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°dot turn

materials aluminum / PC
 weight 186gr / 0.41lb
 voltage 48 Vdc
 wattage 2,5 W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

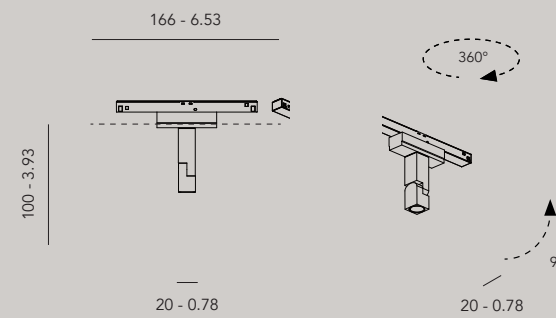

IP20



Order Code
 11310.AA00.BBBB.CCC.DD dot turn
 11313.AA00.BBBB.CCC.DD dot turn monopoint

- AA Finish**
- 01 black
 - 02 white
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed
 - 27 gun metal alu brushed
 - 28 nickel alu brushed
 - 32 copper alu brushed
 - 03 painted custom NCS color

- BBBB Light**
- 9027 cri >90, 2700K
 - 9030 cri >90, 3000K
 - 9040 cri >90, 4000K - on request

- | CCC | Optic | Output* |
|-----|-------|----------------|
| 100 | 10° | 170lm - 2000cd |


- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)
 - CA casambi control

Accessories
 10107 line S plasterkit dot turn

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°out

materials aluminum / PC
 weight 510gr / 1.12lb
 voltage 48 Vdc
 wattage 19W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

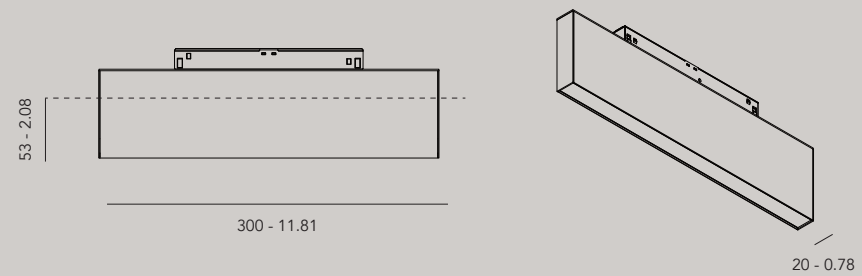

IP20



Order Code

- 11000.AA00.BBBB.CCC.DD** out
- 11002.AA00.BBBB.CCC.DD** out high output
- 11003.AA00.BBBB.CCC.DD** out monopoint
- 11004.AA00.BBBB.CCC.DD** out high output monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control


Accessories

- 10101 line S plasterkit knick/out

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°out medium

materials aluminum / PC
 weight 360 gr / 0.80 lb
 voltage 48 Vdc
 wattage 19W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

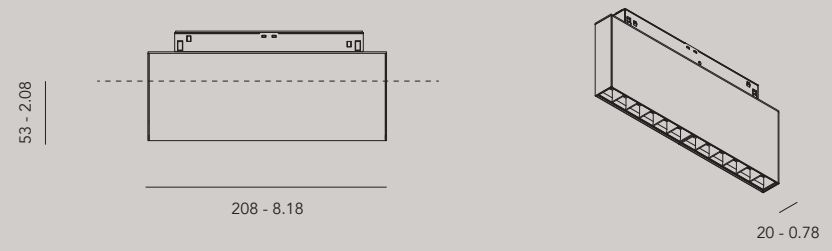

IP20 CE ENEC



°out medium - black glossy louvre



°out medium - white - black glossy louvre



°out medium - brass aluminum - black glossy louvre

Order Code

11010.AA00.BBBB.CCC.DD out medium
 11013.AA00.BBBB.CCC.DD out medium monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
255	25° black glossy louvre	1800 lm
355	35° black glossy louvre	1800 lm

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories



10113 line S plasterkit knick m & out m

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bevel

materials aluminum / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20

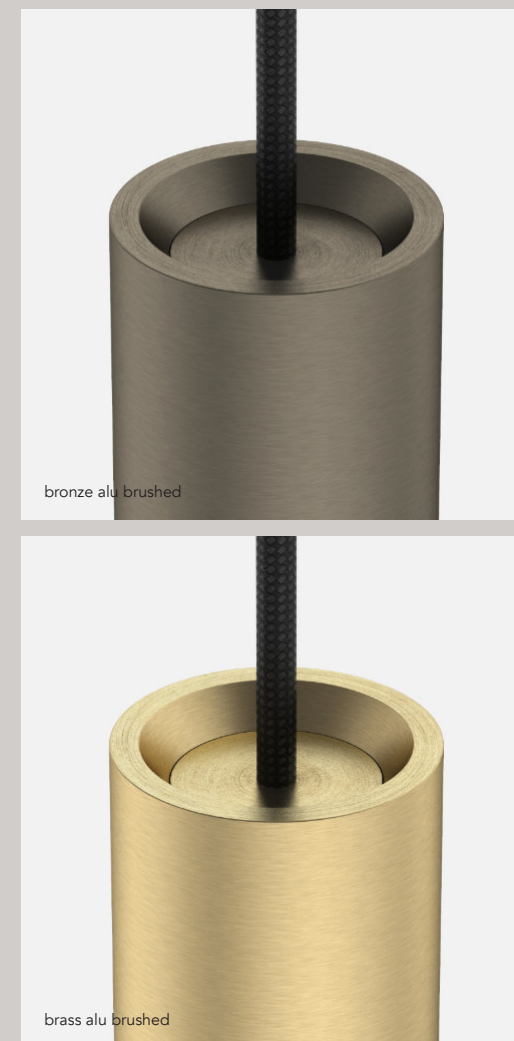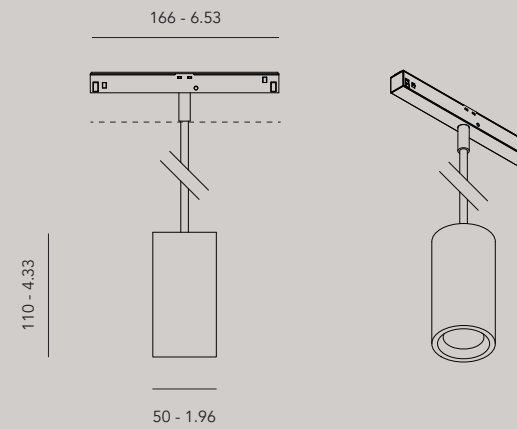

Order Code
 20500.AA00.BBBB.CCC.DD bevel
 20501.AA00.BBBB.CCC.DD bevel monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
CCC	Optic	Output*
200	20°	670lm - 1550cd
300	30°	700lm - 1070cd
500	50°	690lm - 811cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	


Accessories
 10150.0100 recessed ceiling rose black, Ø50 mm
 10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.




°tubu 40

materials aluminum coated / PC
 weight 200gr / 0.44lb
 voltage 48 Vdc
 wattage 6,7 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

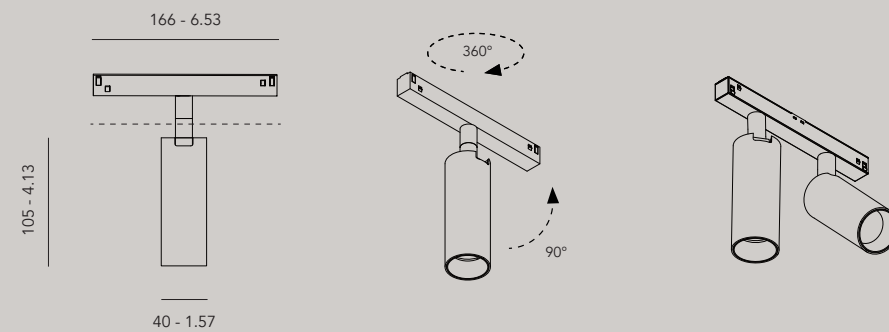

IP20

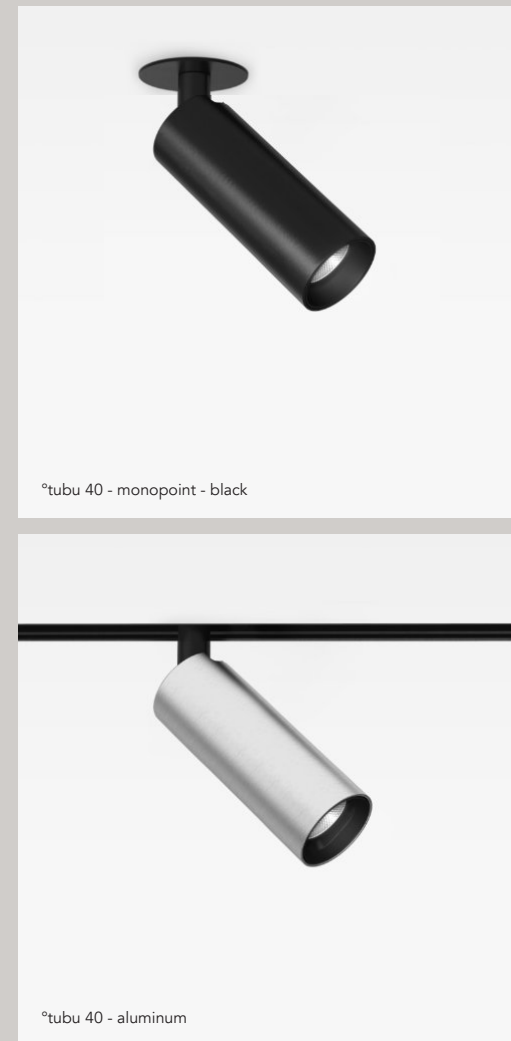

Order Code


11400.AA00.BBBB.CCC.DD tubu 40
 11403.AA00.BBBB.CCC.DD tubu 40 monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	
CCC	Optic	Output*
250	25°	420lm - 1970cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	


* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°tubu 60

materials aluminum coated / PC
 weight 330gr / 0.72lb
 voltage 48 Vdc
 wattage 15,4 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

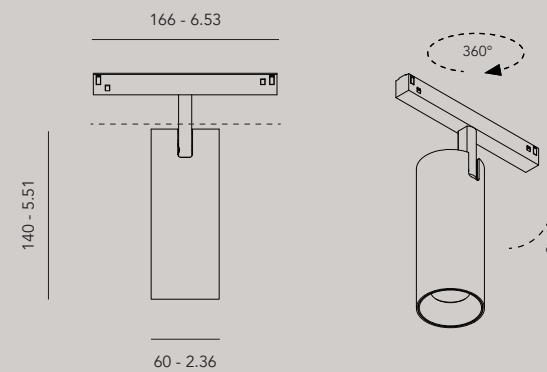

IP20

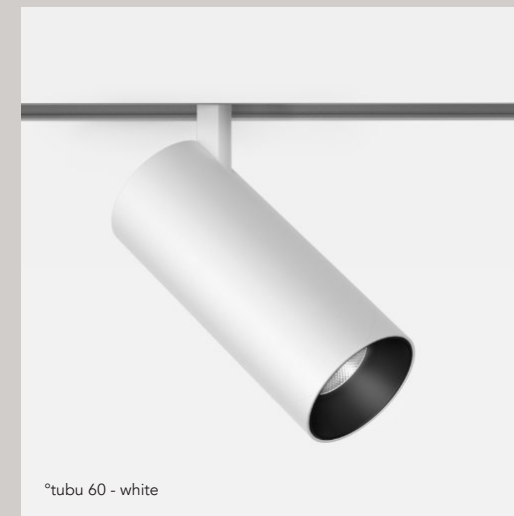

Order Code

11500.AA00.BBBB.CCC.DD tubu 60
 11503.AA00.BBBB.CCC.DD tubu 60 monopoint




AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	
CCC	Optic	Output*
250	25°	1010lm - 2900cd
550	55°	1010lm - 1340cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°tubu long

materials aluminum coated or chrome / PC
 weight 450gr / 0.99lb
 voltage 48 Vdc
 wattage 4 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20 

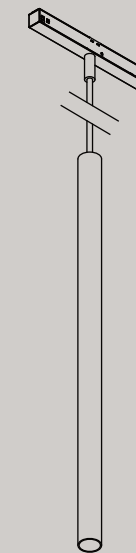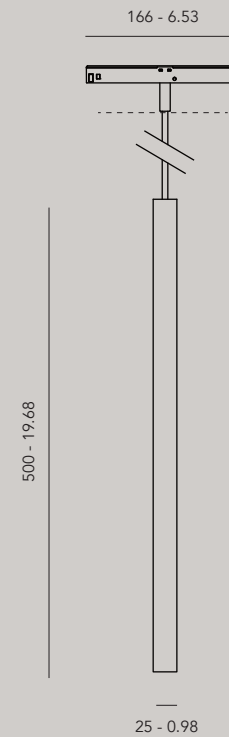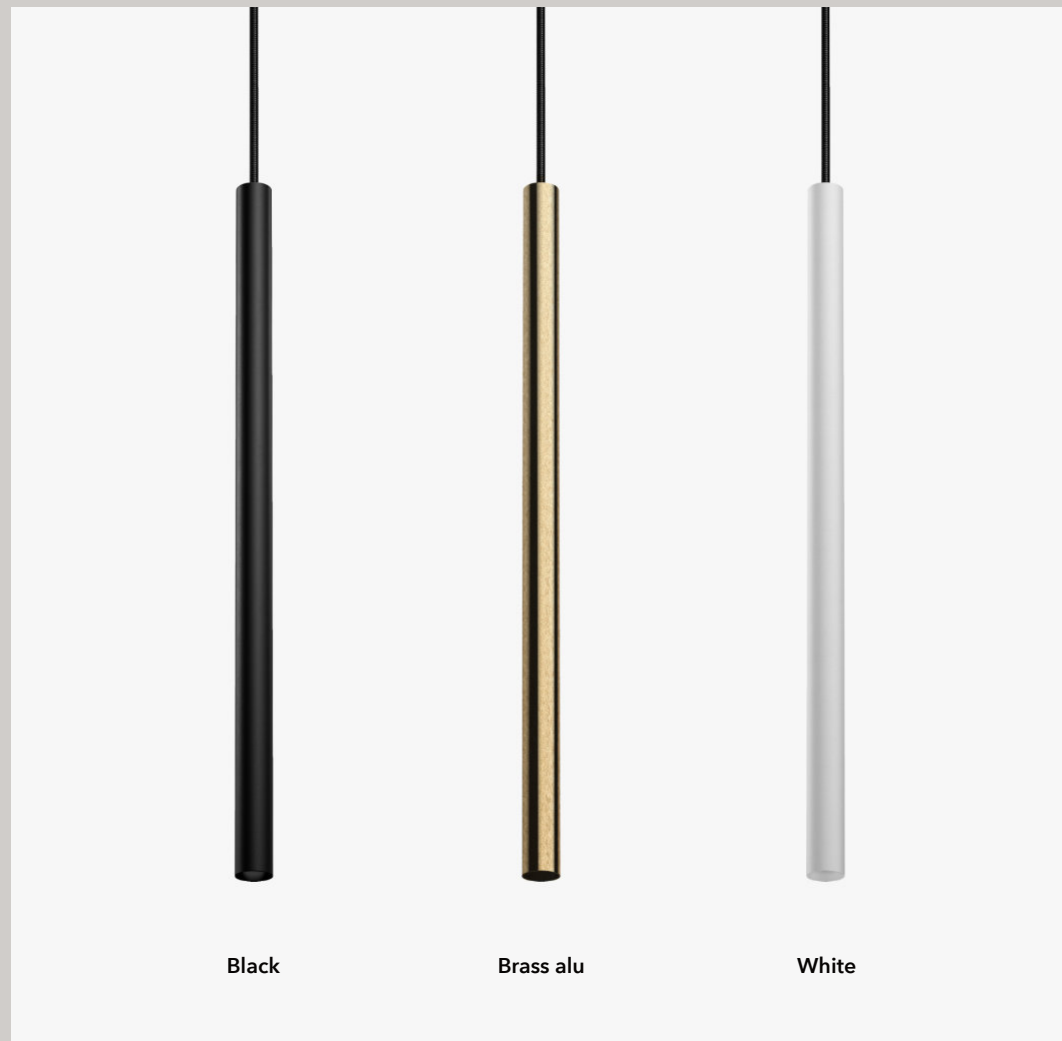

Order Code

11600.AA00.BBBB.CCC.DD tubu long
11603.AA00.BBBB.CCC.DD tubu long monopoint

AA Finish

- 01 black
- 02 white
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

BBBB Light

- 9027 cri >90, 2700K
- 9030 cri >90, 3000K

CCC Optic

- | | | |
|-----|-----|---------------|
| 100 | 10° | 265lm - 670cd |
| 300 | 30° | 265lm - 670cd |

Output*

DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)
- CA casambi control

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

Accessory for monopoint

91004.AA00 recessed canopy



AA Finish



- 01 black
- 02 white
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed
- 27 gun metal alu brushed
- 28 nickel alu brushed
- 32 copper alu brushed
- 03 painted custom NCS color

°multip

Multip is extremely versatile in terms of technology and design.

All modules can be installed alone, or combined with others offering the freedom to form a unique combination, as shown on the image below.

Design by Eden Design

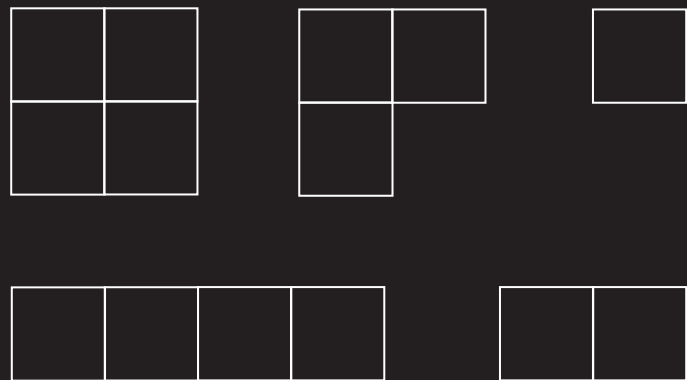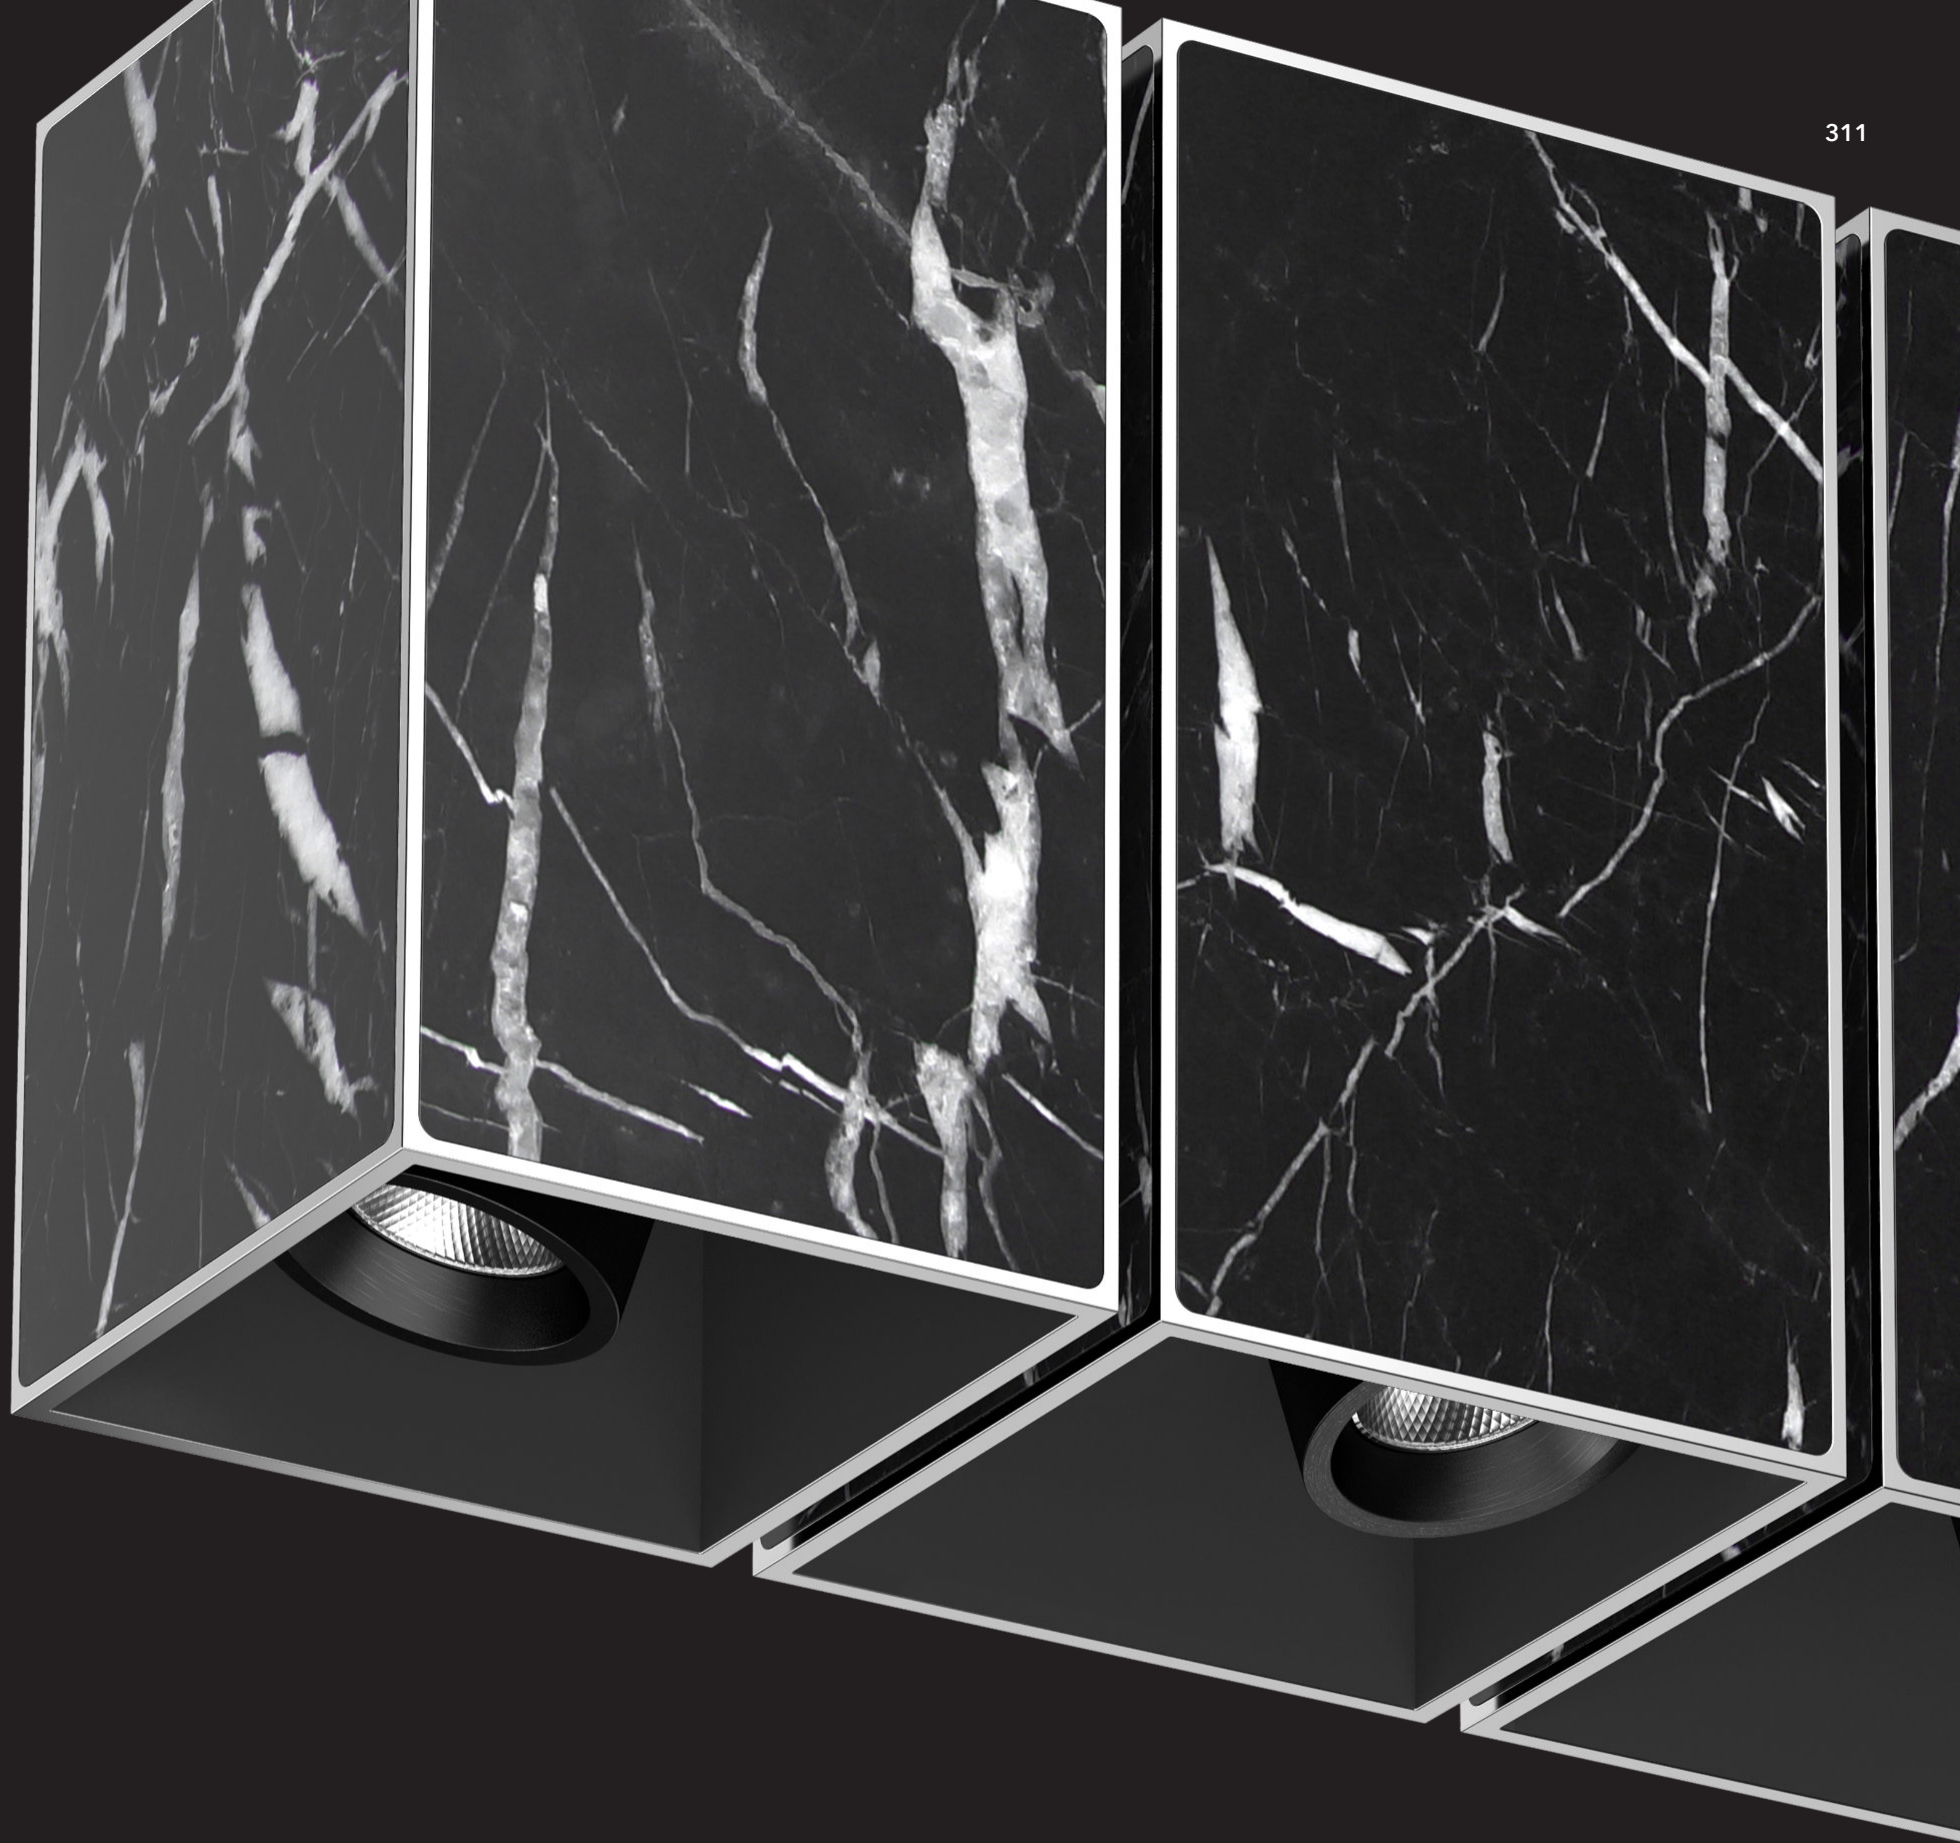



°multip Nero Marquina

Handmade

Each product is handmade in Belgium with the greatest precision.

Light & durable

The world's thinnest stone created from a raw piece of real durable marble stone sourced from Verona, Italy.

Unique & Timeless

Each Nero Marquina marble plate is unique and created by nature over 100 million years ago. Marble is known for its timeless and luxurious look offering you an exclusive product.

Modular


Easy connection system for multiple modules.

Light module

directable LED spot with different options of light beam and colour.


Antiglare design

results in an UGR below 19 offering a good visual comfort.

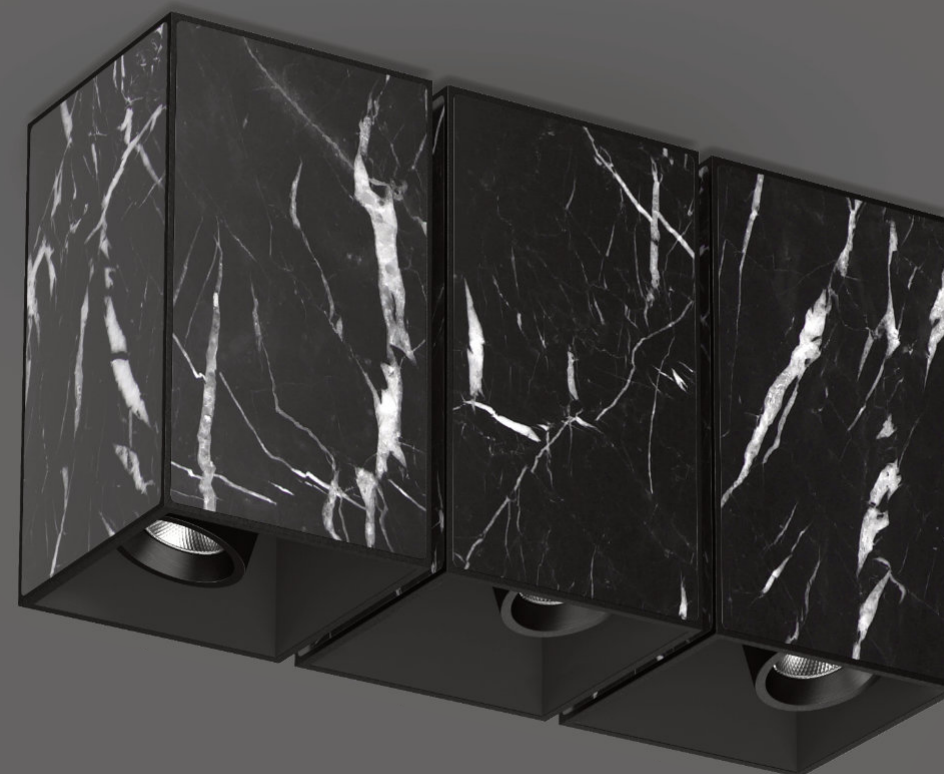

Different finishes with premium materials

over 100 different combinations to match your interior.

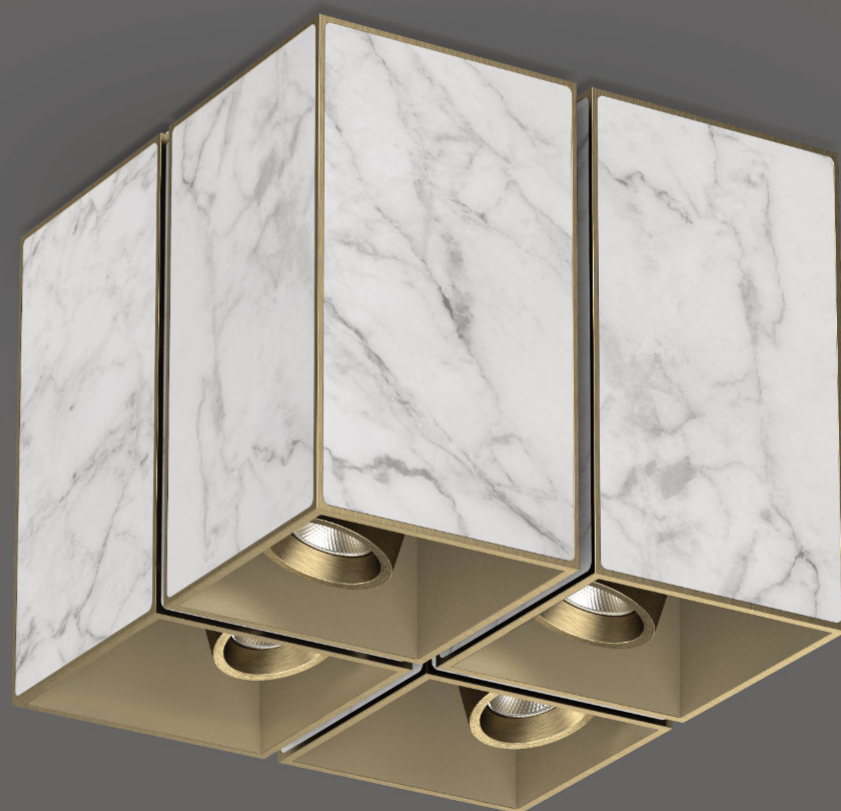





°multip

materials aluminum / see finishes
 weight 600gr / 1.32lb
 voltage 110-230Vac
 wattage 8,2W
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa*

IP20   



°multip - light / body black anodised brushed, inlay Nero Marquina

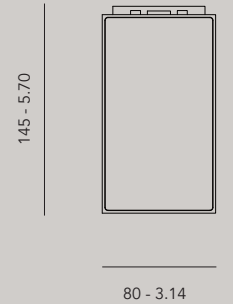

Order Code
25210.AAAA.BBBB.CCC.DD multip spot 230Vac edition
25211.AA00.BBBB.CCC.DD multip spot without inlay 230Vac edition
25212.AAAA.BBBB.CCC.DD multip spot 110Vac edition
25213.AA00.BBBB.CCC.DD multip spot without inlay 110Vac edition

25400.AAAA.0000.000.00 multip audio
25401.AA00.0000.000.00 multip audio without inlay

25100 multip mechanical coupler

AA Finish body
 02 white paint
 21 black alu brushed
 22 natural alu brushed
 23 brass alu brushed
 25 bronze alu brushed
 26 dark bronze alu brushed
 27 gun metal alu brushed
 28 nickel alu brushed
 32 copper alu brushed
 34 aluminum high polished

AA Finish inlay
 40 walnut
 41 oak natural
 42 oak brown
 43 oak black
 60 black marble 'Nero Marquina' (limited edition)
 70 white marble HPL Truescale
 72 brown marble HPL Truescale
 90 black leather
 91 white leather

BBBB Light
 9527 cri 95, 2700K
 9530 cri 95, 3000K


CCC Optic Output*
 300 30° 670lm - 1550cd
 450 45° 700lm - 1070cd
 600 60° 690lm - 811cd

DD Dimming
 ND no dimming
 PH phase cut
 DA dali
 CA casambi

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.



Modular system

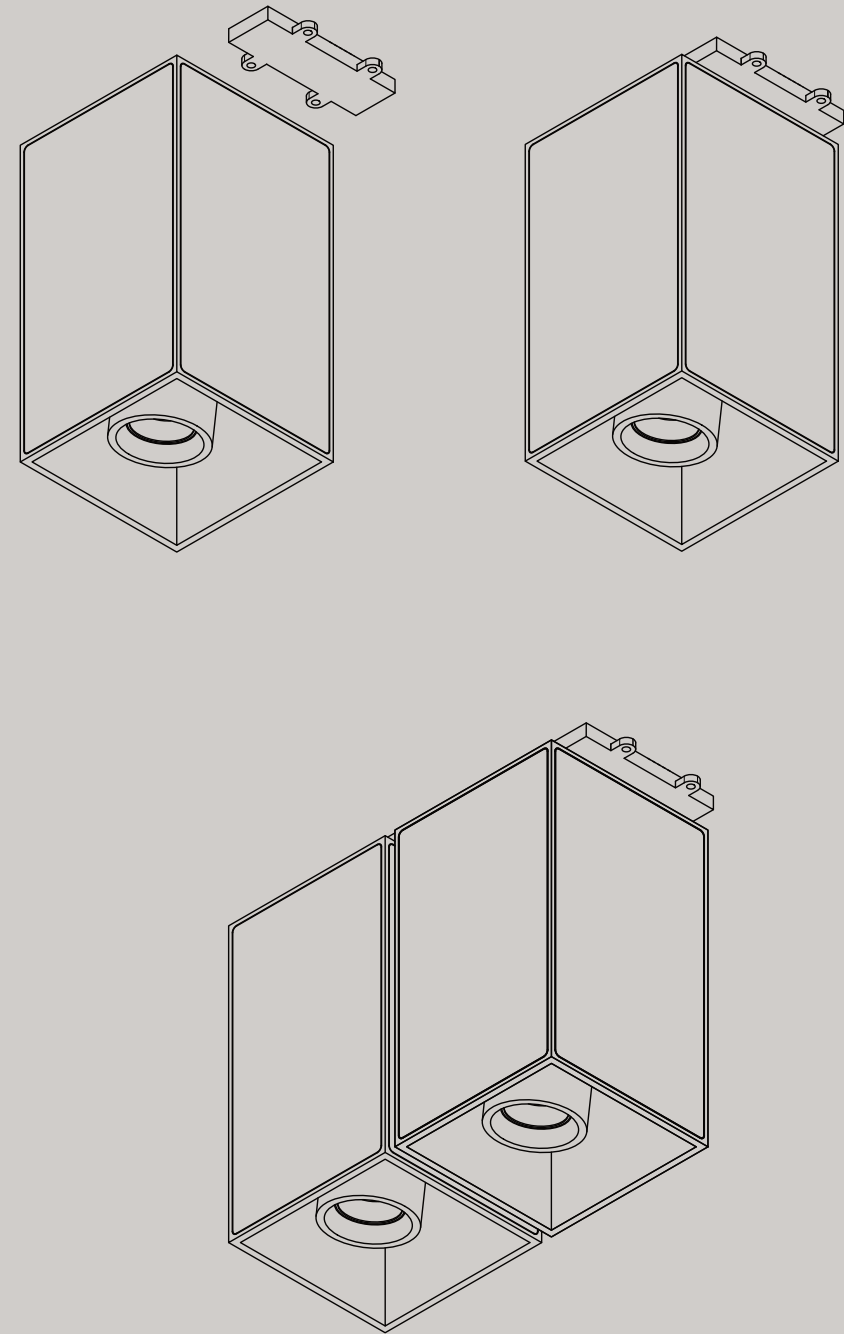

°cd

°cd is a spot, especially developed for cast concrete ceilings.

This collection of spotlights is almost invisibly integrated into the ceiling and can also be combined with a ventilation nozzle.

It offers a solution for the proliferation of surface-mounted devices for ceiling techniques; usually in various sizes and shapes, not compatible with each other.

The spots can easily be mounted in drilled or poured holes in the ceiling. An extra advantage is that the character of a concrete ceiling is additionally exposed.









°cd / Rubenshuis, Hasselt - architect Rubens-Frederix architects - photograph by etre moderne



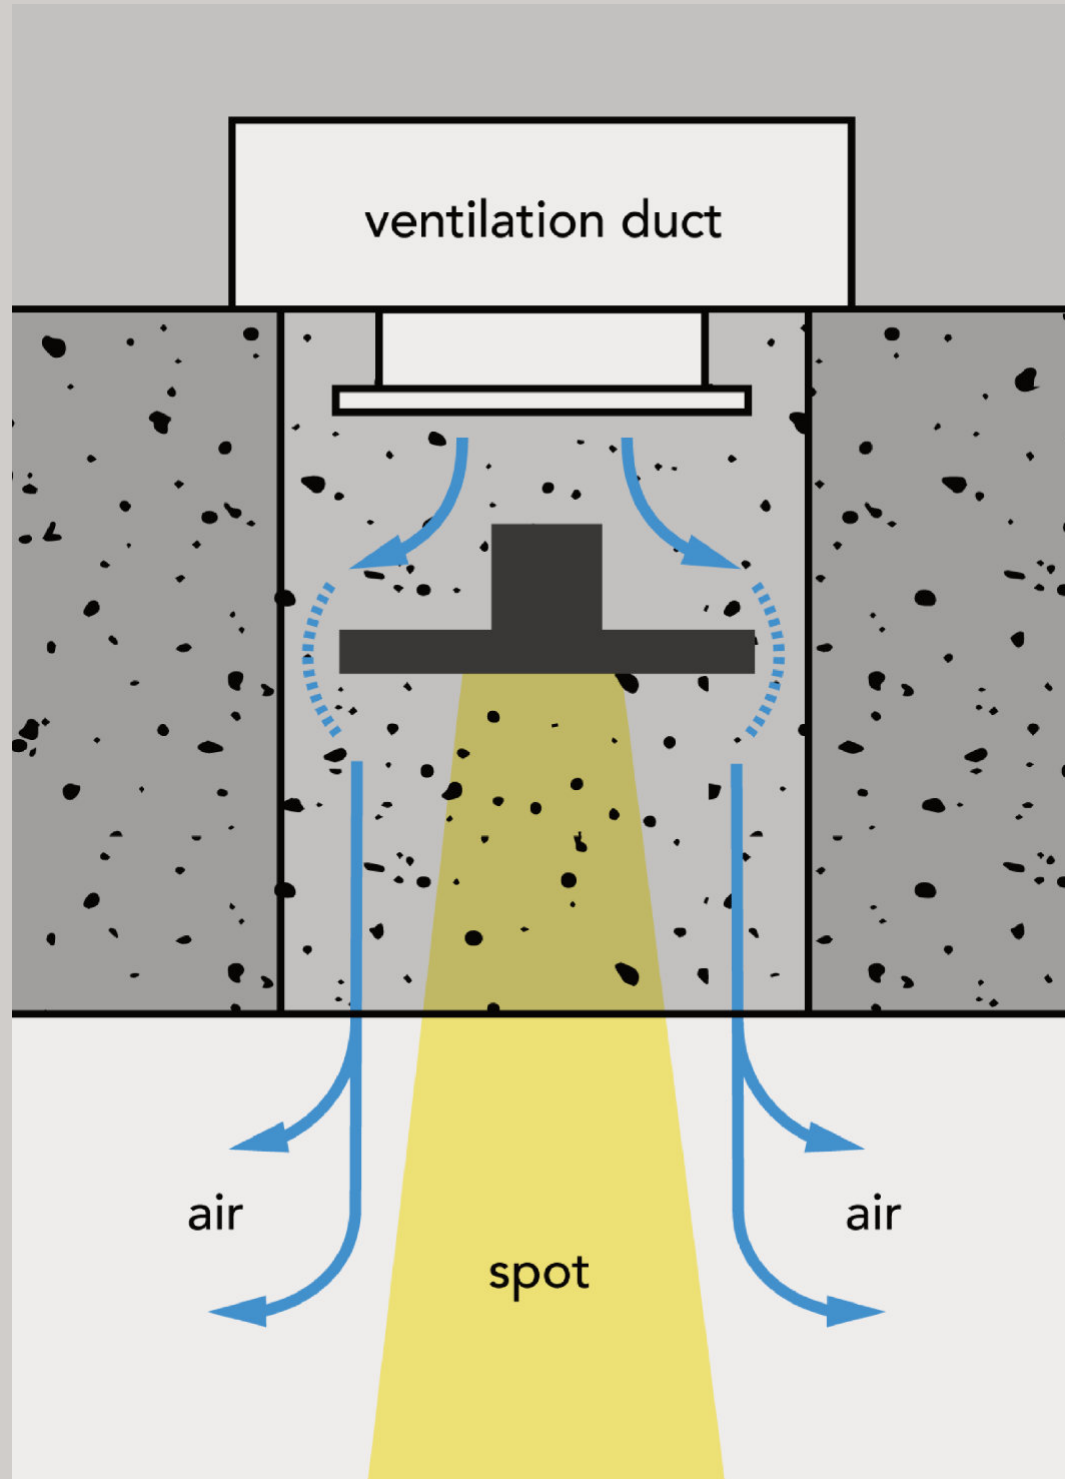

Scheme ventilation

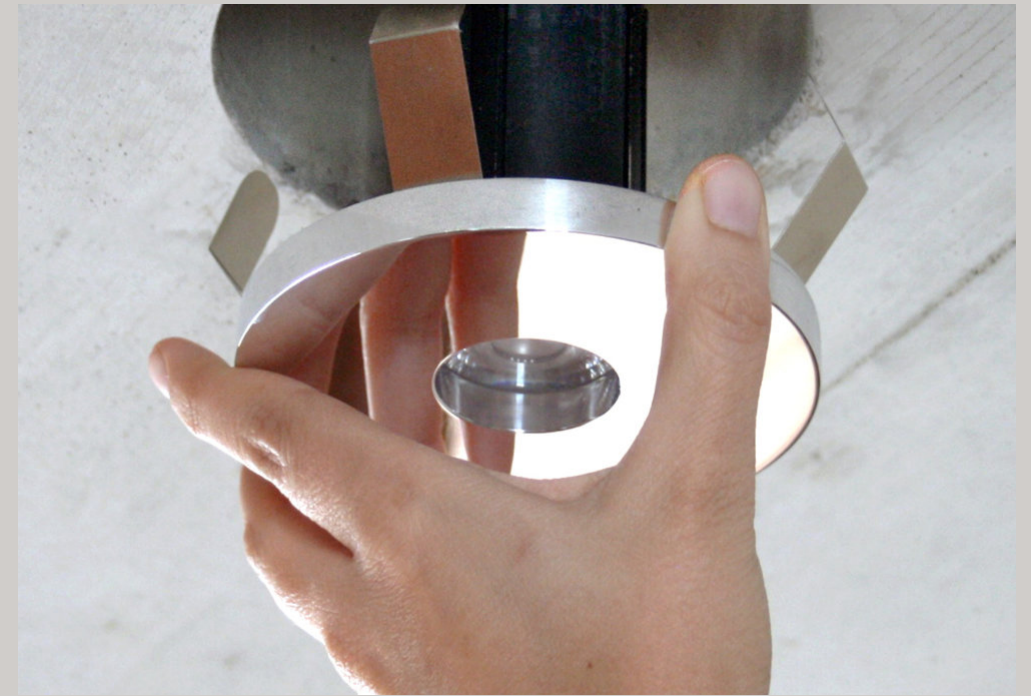


Easy installation



Smaller disc (105 mm) to use with ventilation system / mold has diameter of 135 mm

material aluminum, oak
 weight 0,8 - 1,6 kg / 0,52 - 1,04 lb
 voltage 240 Vac
 cri >90
 wattage 9W
 lumen 700 lm
 dimming phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20 

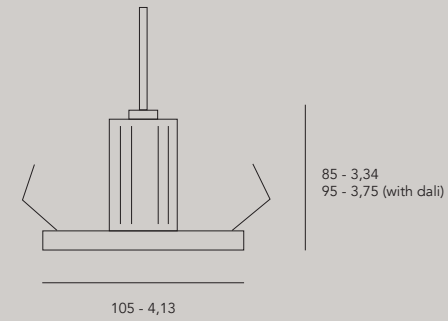

Order Code

04200.AA00.BBBB.CCC.DD diameter 105 mm
04203.AA00.BBBB.CCC.DD diameter 105 mm IP44
 (to use with ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request


CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali

Accessories

- 04210.0000 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 340mm incl.
- 04210.0001 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 160mm incl.

04213 universal control valve for 125 system

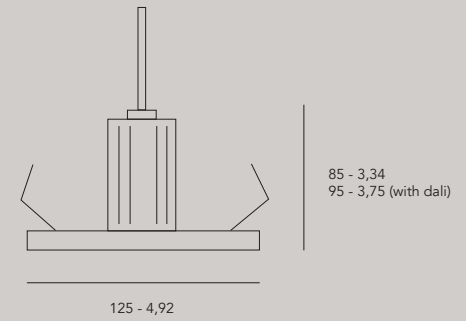

Order Code

04201.AA00.BBBB.CCC.DD diameter 125 mm
04204.AA00.BBBB.CCC.DD diameter 125 mm IP44
 (whitout ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali



04213



04210

°cd+

°cd is a spot that was especially developed for cast concrete ceilings at first.

This new version °cd+ can also be recessed into other types of ceilings and shows the elegant disc.



The spots can easily be mounted in drilled holes in the ceiling. Different aluminum finishes are available to match your interior.



°cd+

material	aluminum, oak
weight	0,8 - 1,6 kg / 0,52 - 1,04 lb
voltage	240 Vac
cri	>90
wattage	9W
lumen	700 lm
dimming	phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20   

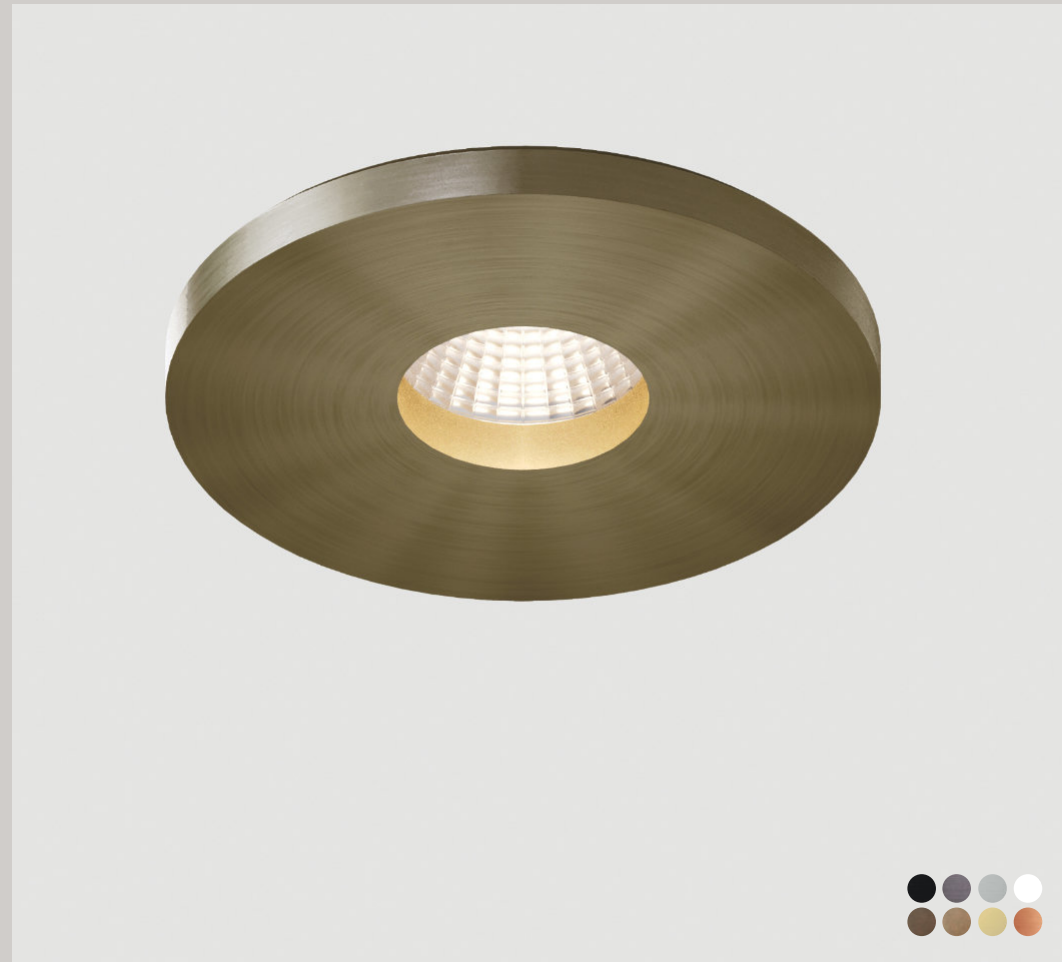

Order Code

04202.AA00.BBBB.CCC.DD diameter 105 mm

AA Finish

01	black
02	white
22	aluminum brushed
34	aluminum polished
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB Light

9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

CCC Optic

CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

DD Dimming

PH	phase cut
DA	dali

°ledline


Continuous lines of light, without limits. Each led module can be cut every 8 cm, this gives architects and lighting designers a lot of flexibility.

Led line has a very good efficiency. A high-tech diffuser was implemented to block as little light as possible and still give an opal look.



°ledline 25

material	aluminum
weight	0,8 kg/m - 0,52 lb/ft
voltage	24Vdc
cri	>90
wattage	13 or 28W / meter
dali	supported DT6 option



IP20

LL25.L.B.T.K led modules cuttable every 8 cm

Length	2000 100 - ...	standard length custom length (multiple of 8 cm)
--------	--------------------------	-----------------------------------------------------

Body color	BK WH AL	black matt ral 9011 white matt ral 9016 aluminum color ral 9006 (on request only)
------------	-------------------------------------	-----------------------------------------------------------------------------------------

Type	SM PD	surface mount pendant
------	------------------------	--------------------------

K	WW.13	2700K 13W 960 lm/m
	WW.2.13	3000K 13W 1020 lm/m
	NW.2.13	4000K 13W 1020 lm/m
	WW.28	2700K 28W 1650 lm/m
	WW.2.28	3000K 28W 1780 lm/m
	NW.2.28	4000K 28W 1850 lm/m

Accessories	LL25.EC.BK	led line 25 End Cap Black
	LL25.EC.WH	led line 25 End Cap White
	LL25.EC.AL	led line 25 End Cap Aluminum

Driver	24Vdc power supply (remote)
--------	-----------------------------



°sphere

Belgian architect Bart Lens needed a large lamp that would create an encircling sphere of light above the conference table in their office, and so began the search. After a long and fruitless quest, he finally decided to design his own mega-light with the "sphere" of a dome. The result has been likened to a "Calimero" dome, a giant bell, a half moon.... Everybody seems to have a different name for it.

Design by Bart Lens





°sphere large / Château Fonroque - Studio Jean-Philippe Nuel - photo Christophe Dugied



°sphere large with imitation gold leaf / MRKT - Hirshleifers, NY, USA



°sphere large / architect Lens°ass



°sphere large / office



°sphere large / House Roeselare, Belgium - architect Lens°ass - photograph by Bieke Claessens



°sphere large / "Rabbit Hole", Belgium - architect Lens°ass - photograph by Philippe van Gelooven



°sphere large / 'Offices Mars Company', Moscow - realised by LT Project - architect UNK Project


°sphere large / Concept Store Hasselt, Belgium - architect Lens°ass - photograph by Philippe van Gelooven




°sphere large / Indera upholstery - photograph by Decovan - Home-Art



°sphere large / b&b moka & vanille, Heusden-Zolder - moka-projects

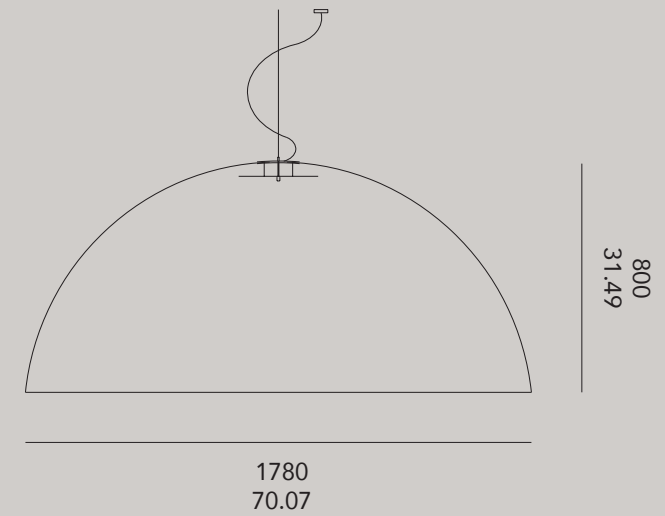


°sphere large 178




SPH.L.127.000	1 x E27 socket - excl lamp
SPH.L.227.000	2 x E27 socket - excl lamps
SPH.L.327.000	3 x E27 socket - excl lamps
SPH.L.427.000	4 x E27 socket - excl lamps
SPH.L.1LED.10V	1 x LED module 3000lm cri90+, 37,5W, dimmable (1-10V)*
SPH.L.1LED.DAL SPH.	1 x LED module 3000lm cri90+, 37,5W, dimmable (DALI)*
L.3LED.PHA	3 x LED module 3750lm cri90+, 46,5W, dimmable (phase cut)*
SPH.L.3LED.10V	3 x LED module 9000lm cri90+, 112,5W, dimmable(1-10V)*
SPH.L.3LED.DAL	3 x LED module 9000lm cri90+, 112,5W, dimmable(DALI)*
SPH.L.LEDV2.DAL	1 x LED disc 4000lm, 3000K
	*3000K, 2700K Warm white on request
PLX.SPH.50	coverplate diffuser plexi 50 cm Ø

material: ABS plastic, optional RAL colors / gold leaf both inside and out - weight: 25,5 kg / 899,48 oz
 included : 2 m cable, ceiling rose and suspension - 230VAC - max 250W

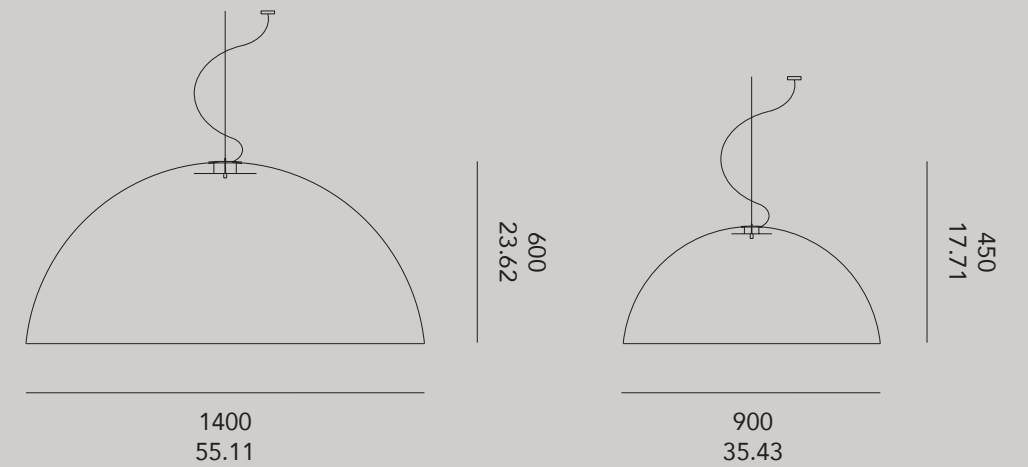

°sphere medium 140

°sphere small 90



SPH.M.127.000
 SPH.M.227.000
 SPH.M.327.000
 SPH.M.427.000

SPH.S.127.000
 SPH.S.227.000
 SPH.S.327.000
 SPH.S.427.000

1 x E27 socket - excl lamp
 2 x E27 socket - excl lamps
 3 x E27 socket - excl lamps
 4 x E27 socket - excl lamps

SPH.M.1LED.PHA

SPH.S.1LED.PHA
 SPH.S.1LED.10V
 SPH.S.1LED.DAL

1 x LED module 1250lm cri90+, 15,5W,
 dimmable 3000K warm white*

SPH.M.1LED.10V
 SPH.M.1LED.DAL

1 x LED module 3000lm cri90+, 37,5W,
 3000K*, dimmable

SPH.M.3LED.DAL
 SPH.M.3LED.PHA

3 x LED module 3750lm cri90+, 46,5W,
 3000K*, dimmable

SPH.M.3LED.10V
 SPH.M.3LED.DAL

3 x LED module 9000lm cri90+, 112,5W,
 3000K*, dimmable

SPH.M.LEDV2.DAL

1 x LED disc 4000lm + coverplate, 3000K


*2700K on request

PLX.SPH.35
 PLX.SPH.50


coverplate plexi 35 cm Ø
 coverplate plexi 50 cm Ø

material: ABS plastic, optional RAL colors / gold leaf both inside and out - weight M: 13,5 kg - 476 oz - weight S: 5 kg - 176 oz
 included: 2 m cable, ceiling rose and suspension - 230VAC - sphere small: max 100W - sphere medium: max 150W

lightsources for °sphere

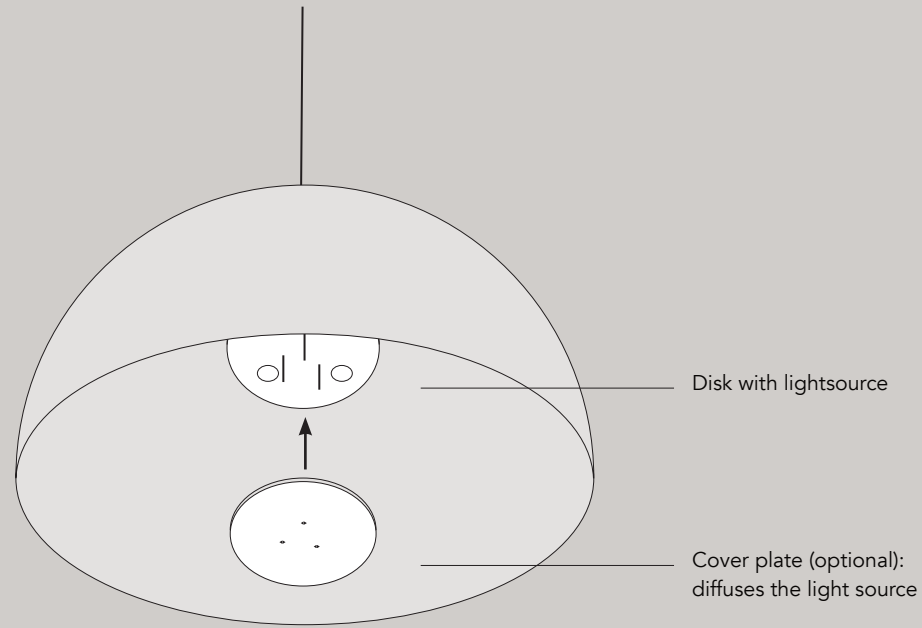

1 x LED module (diam. 300mm)

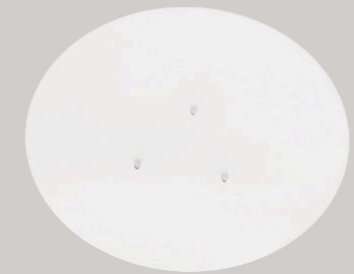

1 x LED disc (diam. 315mm)
with coverplate 350mm (incl.)
(equal light source)



1 x socket E27 (diam. 150mm)
excl. light bulbs



3 x socket E27 (diam. 300mm)
excl. light bulbs



3 x LED module (diam. 400mm)



3 x LED module (diam. 400mm) or
3 x E27 (diam. 300mm)
with cover plate 500mm

°XXXL(amp)

Perhaps symptomatic of an architect's mindset, the lamps and objects are becoming increasingly 'space defining'. The xxxl(amp) is essentially a flattened dome, inspired by the shape of a Chinese lantern. The twelve-segment construction makes the connection with the lantern, but a pumpkin is perhaps the first association that comes to mind, while the suspension system recalls an upside-down hot-air balloon. If the ceiling is high, but not overly high, the lamp can be hung at about 1.50m. As befits any impressive space, you'll want to enter with a slight bow. Once seated at the dining or conference table, you'll still retain a sense of the surroundings beyond the boundary. Hanging a half or a quarter xxxl(amp) in a mirrored room creates an impression of spacious rooms full of giant lanterns.

Design by Bart Lens







Project Siroto Architects



YU STUDIO - project Wuhan, China






Belgian TV-show 'Volt'




C Chocolat, Brest - architect Trace & Associes - photograph by Pierre-Jean Verger



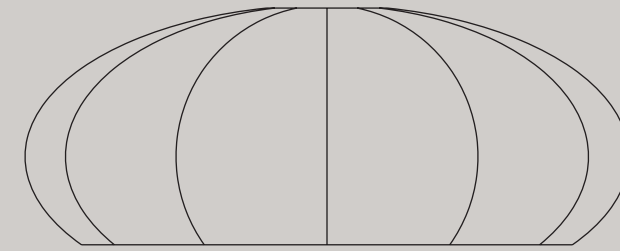


1600
62.99

3250
127.95

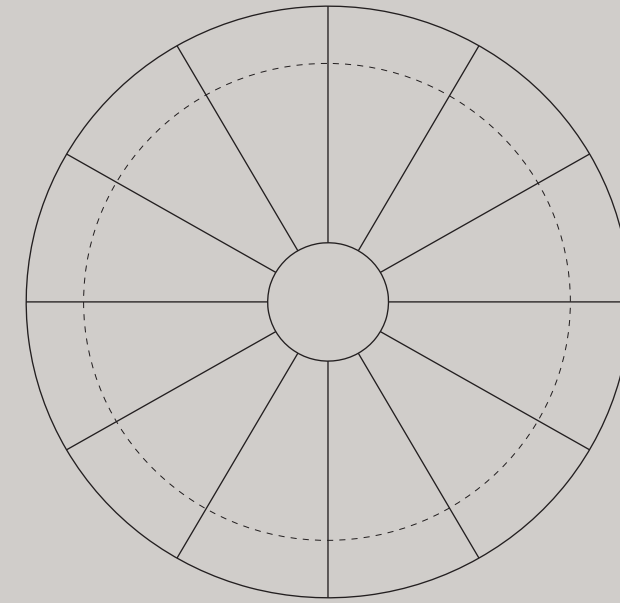

4000
157.48

°XXXL(amp)



XXXL.927.000	XXXL(amp) standard 9 x E27 - excl. lamps
XXXL.927.RGB.M	XXXL(amp) 9 x E27 socket + RGB LED master + remote control
XXXL.927.RGB.S	XXXL(amp) 9 x E27 socket + RGB LED slave
XXXL.927.RGB.DMX	XXXL(amp) 9 x E27 socket + RGB LED DMX controllable
XXXL.927.RGB.DAL	XXXL(amp) 9 x E27 socket + RGB LED DALI controllable

material: PE - weight: 355 kg / 12.525 oz - 230VAC - max 1500W
included: 4 m/155 in cables & 12 suspension elements


°led on fire

In a T-restaurant in Peking (China), Mr. Lens was eating at an immense mirror table with candles hanging above him. It was cozy, romantic, but also streamlined and modern. For another design we already experimented with hanging led-lights suspended from low charged wires. We marveled at the vision of a completely accidental, out-of-the box combination of a led underneath a burning candle. The effect of the translucent candle-emulsion was also heartwarming. The apparition of a led fixture, burning, not at all kitschy, with light shimmering through the material structure is imprinted in our minds. "The led is on fire", we tried it out.


Design by Bart Lens





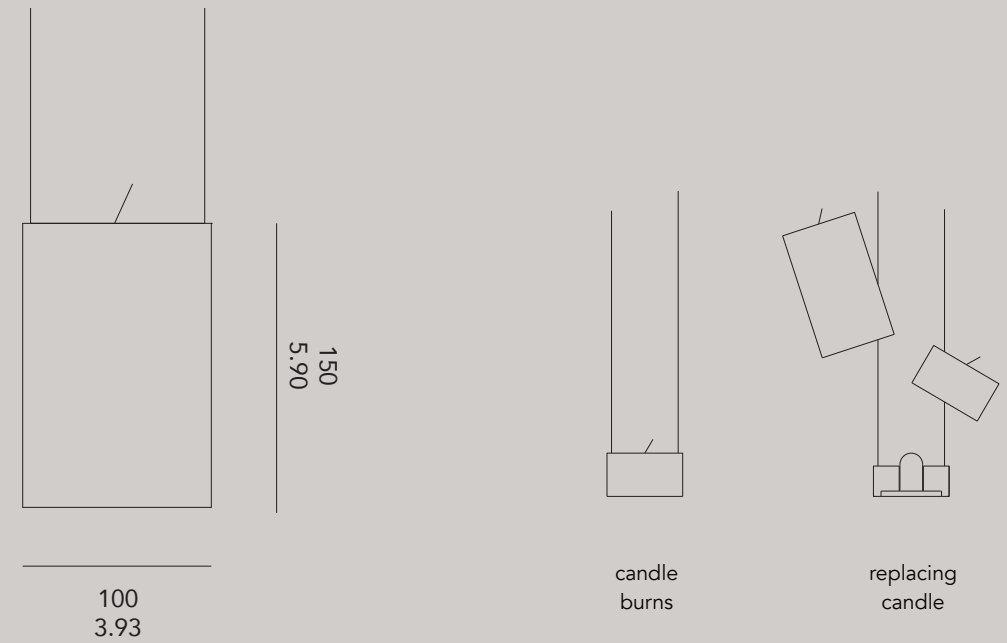

°led on fire



LOF

led on fire, 2700K, 200lm

Accessories

LOF.ROS.T

ceiling rose round Trimless

LOF.ROS.R

ceiling rose round Recessed

LOF.ROS.S


ceiling rose round Surface mount, single piece

LOF.ROS.S3

ceiling rose rectangle Surface mount, three pieces

LOF.RC

replacement wax candle

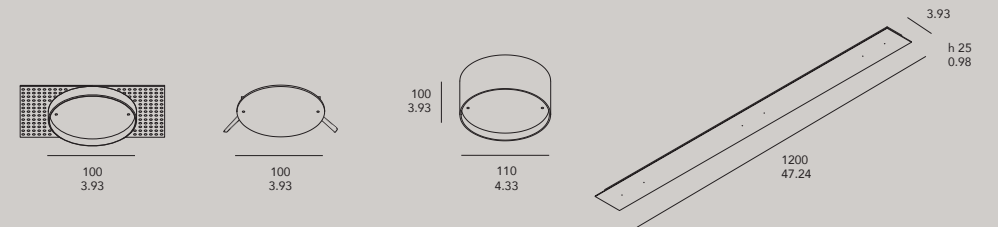

materials: aluminum, glass, wax candle - weight: 1,2 kg / 42,3 oz - indoor use - 230VAC - max. 4W

included: 2m cables and LED driver 1-10V or Dali dimmable (on request)

°fool moon

People have always been fascinated by the light of a perfect circle. The returning full moon and the natural phenomena ascribed to it (higher childbirth percentage, fertility, transformation from human to animal, etc.), the archetypical form of a UFO, the shape of a gong, the sun... are but a few striking examples. Despite its shape of a full circle ('full moon'), the lamp can be used in several positions: horizontally, diagonally, obliquely or vertically ('fool moon'). Thanks to its large dimensions, the lamp is easily recognisable and has the possibility of demarcating or creating spaces. The lamp also has a highly symbolic value due to its imposed abstraction.


Design by Bart Lens








°fool moon wall 1 / Mendeli Street Hotel, Tel-Aviv - ST-OR - lighting designer Ailon Gavish, Studio Twilight - photograph by Omri Amsalem

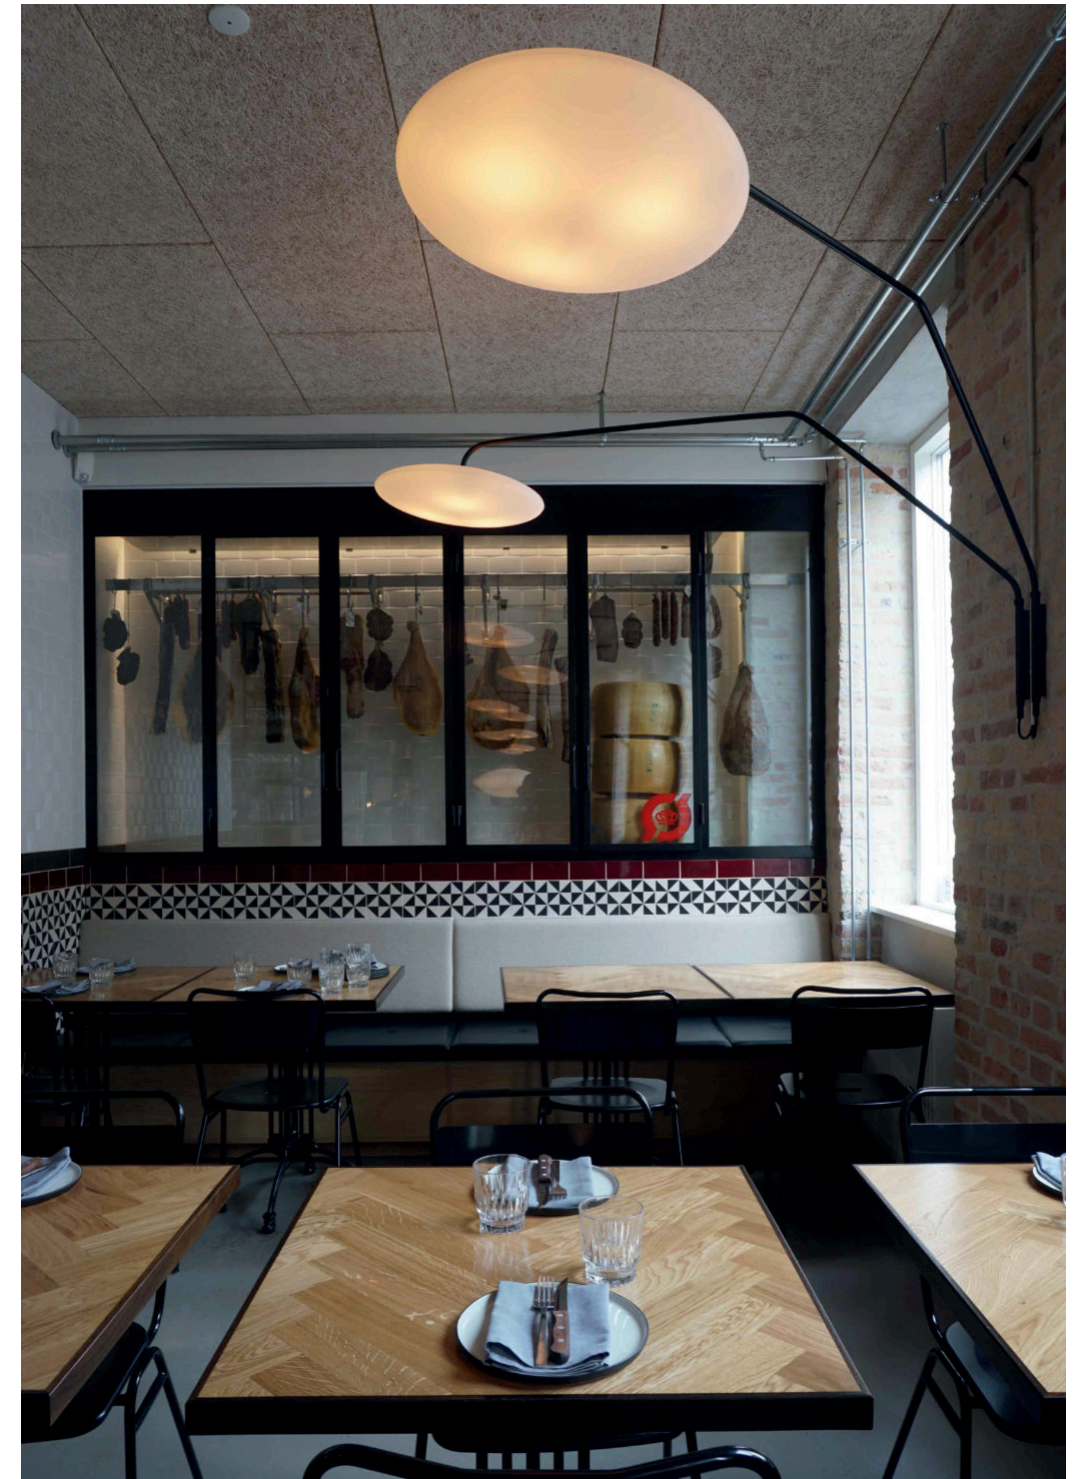

°fool moon wall 1 / Christian Puglisi's restaurant BÆST, Copenhagen - architect Fobsi Studio

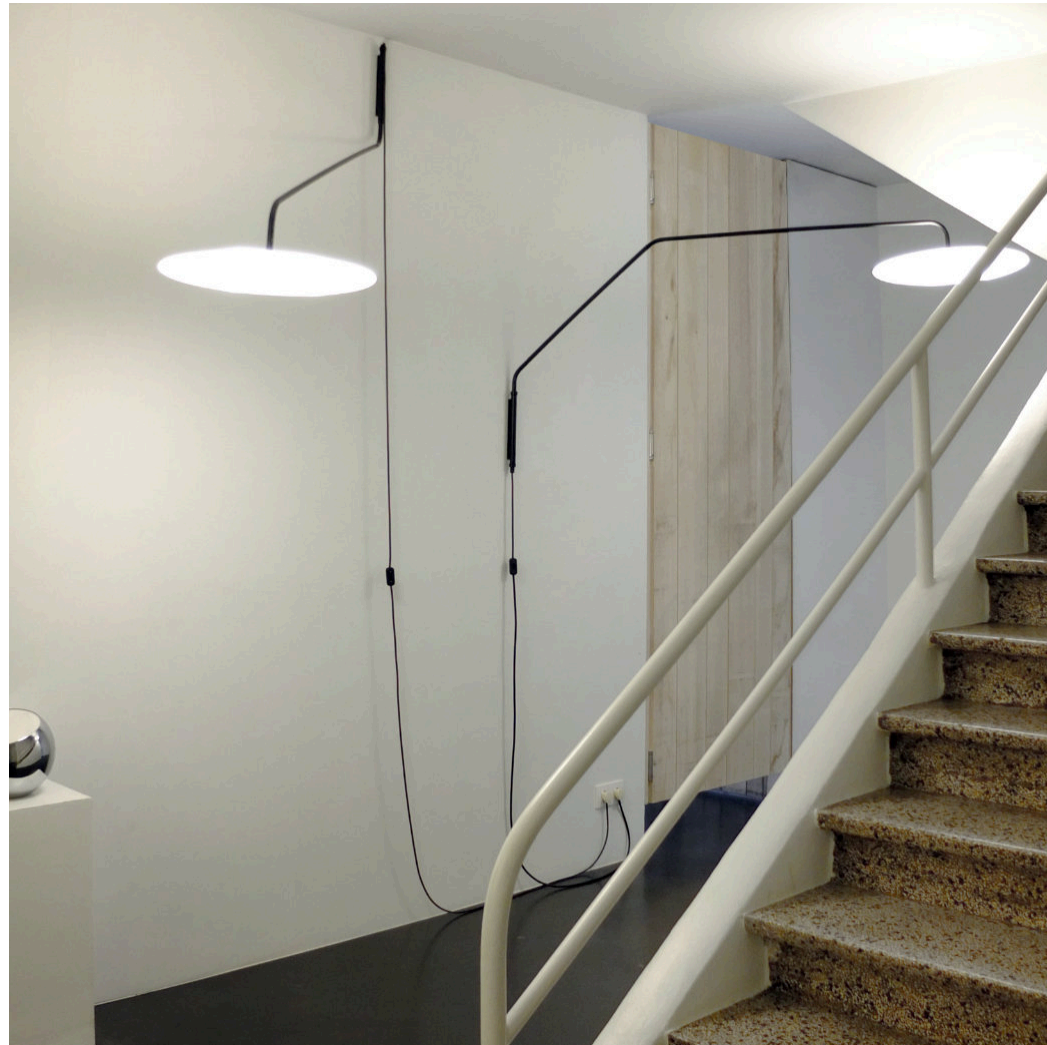


°fool moon wall 1 & 2 / Office hall, Hasselt - architect Lens°ass

°fool moon wall 2 / Depoortere, Hasselt - architect Lens°ass - photograph by Bieke Claessens





medium



h 18 / 0.70

1200
47.24


small



h 10 / 0.39

500
19.68


°fool moon medium



FM.M.LED.WW.10V
FM.M.LED.WW.DAL
FM.M.LED.WW.000
FM.M.LED.WW2.10V
FM.M.LED.WW2.DAL
FM.M.LED.WW2.000
FM.M.000.RGB.DMX
FM.M.000.RGB.DAL
FM.M.000.RGB.M
FM.M.000.RGB.S

Fool Moon medium LED 2700K dimmable 0/1-10V, 52W 110-264VAC
 Fool Moon medium LED 2700K dimmable DALI, 52W 110-264VAC
 Fool Moon medium LED 2700K not dimmable 52W 110-264VAC
 Fool Moon medium LED 3000K dimmable 0/1-10V, 52W 110-264VAC
 Fool Moon medium LED 3000K dimmable DALI, 52W 110-264VAC
 Fool Moon medium LED 3000K not dimmable 52W 110-264VAC
 RGB LED DMX controllable
 RGB LED DALI controllable
 RGB LED - master with remote control
 RGB LED - slave (master required)

°fool moon small



FM.S.LED.PHA.US
FM.S.LED.PHA
FM.S.LED.DAL
FM.S.RGB.DMX
FM.S.RGB.DAL
FM.S.RGB.M
FM.S.RGB.S

Fool moon small 3 x LED 6W 2700K, E14 socket, Phase-cut, 110VAC
 Fool moon small 3 x LED 6W 2700K, E14 socket, Phase-cut, 230VAC
 Fool moon small 3 x LED 6W 2700K, E14 socket, Dimmable Dali, 230VAC
 RGB LED DMX controllable, driver remote (in ceiling)
 RGB LED DALI controllable, driver remote (in ceiling)
 RGB LED - master with remote control
 RGB LED - slave (master required)

material: PE - weight M: 20 kg - 705 oz - weight S: 3 kg - 105 oz

FM medium max. 72W - FM small max. 15W - 230VAC

included: 2 m cable, ceiling rose and suspension elements




WALL 1

900
35.43




WALL 2

900
35.43

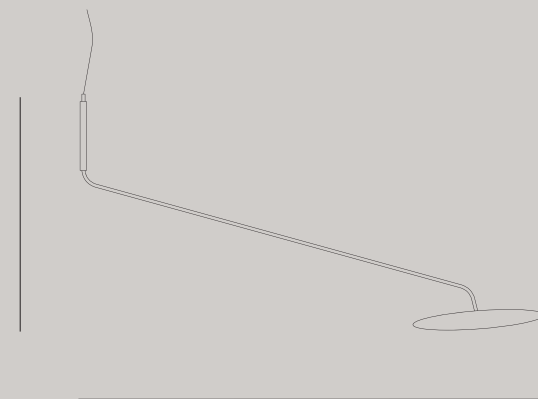

1750
68.89

°fool moon wall type



- FM.S.3LED.WALL1.HW** 3 x led 6W, E14 socket, phase-cut dimmable, 2700K, hard-wired
- FM.S.3LED.WALL1.PL** 3 x led 6W, E14 socket, phase-cut dimmable, 2700K, with plug and switch (length cable tbd; distance to switch is 30 cm)
- FM.S.3LED.WALL2** 3 x led 6W, E14 socket, phase-cut dimmable, 2700K

materials: PE & steel - weight: 4,5 kg / 158 oz - 230VAC - max. 15W

°xl(amp)

This lamp was initially designed to mark the edge of a fair booth and simultaneously present images on the inside. The lamp shade foil is foldable. This allows for easy transport and makes it possible to cover the lamp with a photo film.

The lamp, by virtue of its size, defines its own space.

Design by Bart Lens












Office Nulens, Belgium - architect Lens°ass - photograph by Philippe van Gelooven




Masseria Antonio Augusto, Leverano, Italy - photograph by Marcello Moscara



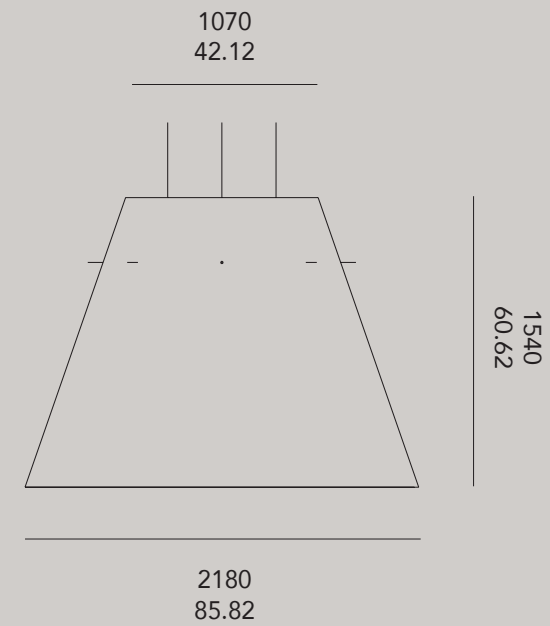

°xl(amp) large



XL.154.000	Xlamp h154 - 1 x E27 - excl lamp
XL.154.RGB.M	Xlamp h154 - 1 x E27 socket + RGB LED Master with remote control - excl lamp
XL.154.RGB.S	Xlamp h154 - 1 x E27 socket + RGB LED slave - excl lamp
XL.154.RGB.DMX	Xlamp h154 - 1 x E27 socket + RGB LED DMX controllable - excl lamp
XL.154.RGB.DAL	Xlamp h154 - 1 x E27 socket + RGB LED DALI controllable - excl lamp

material: polyester - weight: max 34kg / 1.200oz - included: 2m cable, ceiling rose, 3 suspension elements - 230VAC - max 1000W


°eclipse

Meet eclipse, a family of indirect lighting discs. with the lights turned off, eclipse can serve as a design object or mirror.

With the lights turned on, eclipse transforms into a wall or ceiling light with an indirect light source giving you a solar eclipse effect.

Three different sizes give you the opportunity to combine them in different ways and create your own design.

Design by Eden Design

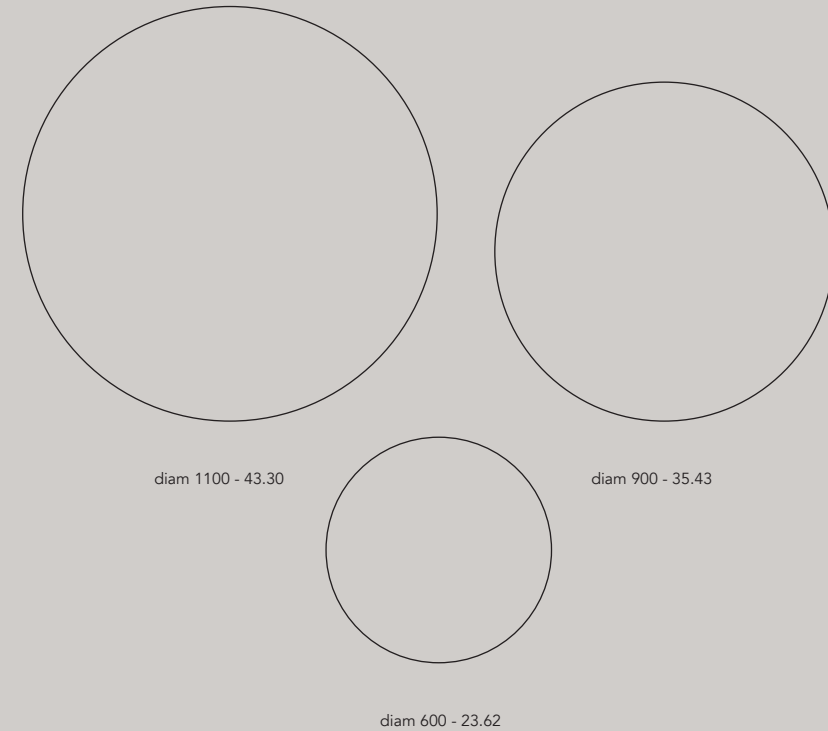

Order Code

04000.AA00.BBBB.CCC.DD eclipse 110

04001.AA00.BBBB.CCC.DD eclipse 60

04003.AA00.BBBB.CCC.DD eclipse 90

°eclipse Ø110 x 3 cm - 14,5kg - 46 W

°eclipse Ø60 x 3 cm - 8 kg - 23W

°eclipse Ø90 x 3 cm - 11 kg - 30W

100-240Vac

IP20   

AA	Finish
08	silver mirror
09	anthracite mirror
10	bronze mirror

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K

DD	Dimming
ND	no dimming
DA	dali
01	0-10V
11	1-10V



°eclipse 60 & 110 bronze - Villa Zonhoven





°eclipse 110 - silver mirror



°eclipse

411


°eclipse 110 - Showroom EllisEllis Denmark


°diabolo

Two hemispheres, a couple or twins, of which one of them is lighted by LED and rotates 190° / 360° on its axis. Single or in line, it evokes images of a solar eclipse, a chesterfield chair or a diabolo toy. Available as table-lamp, wall lamp or ceiling lamp and in several colors.


Design by Bart Lens



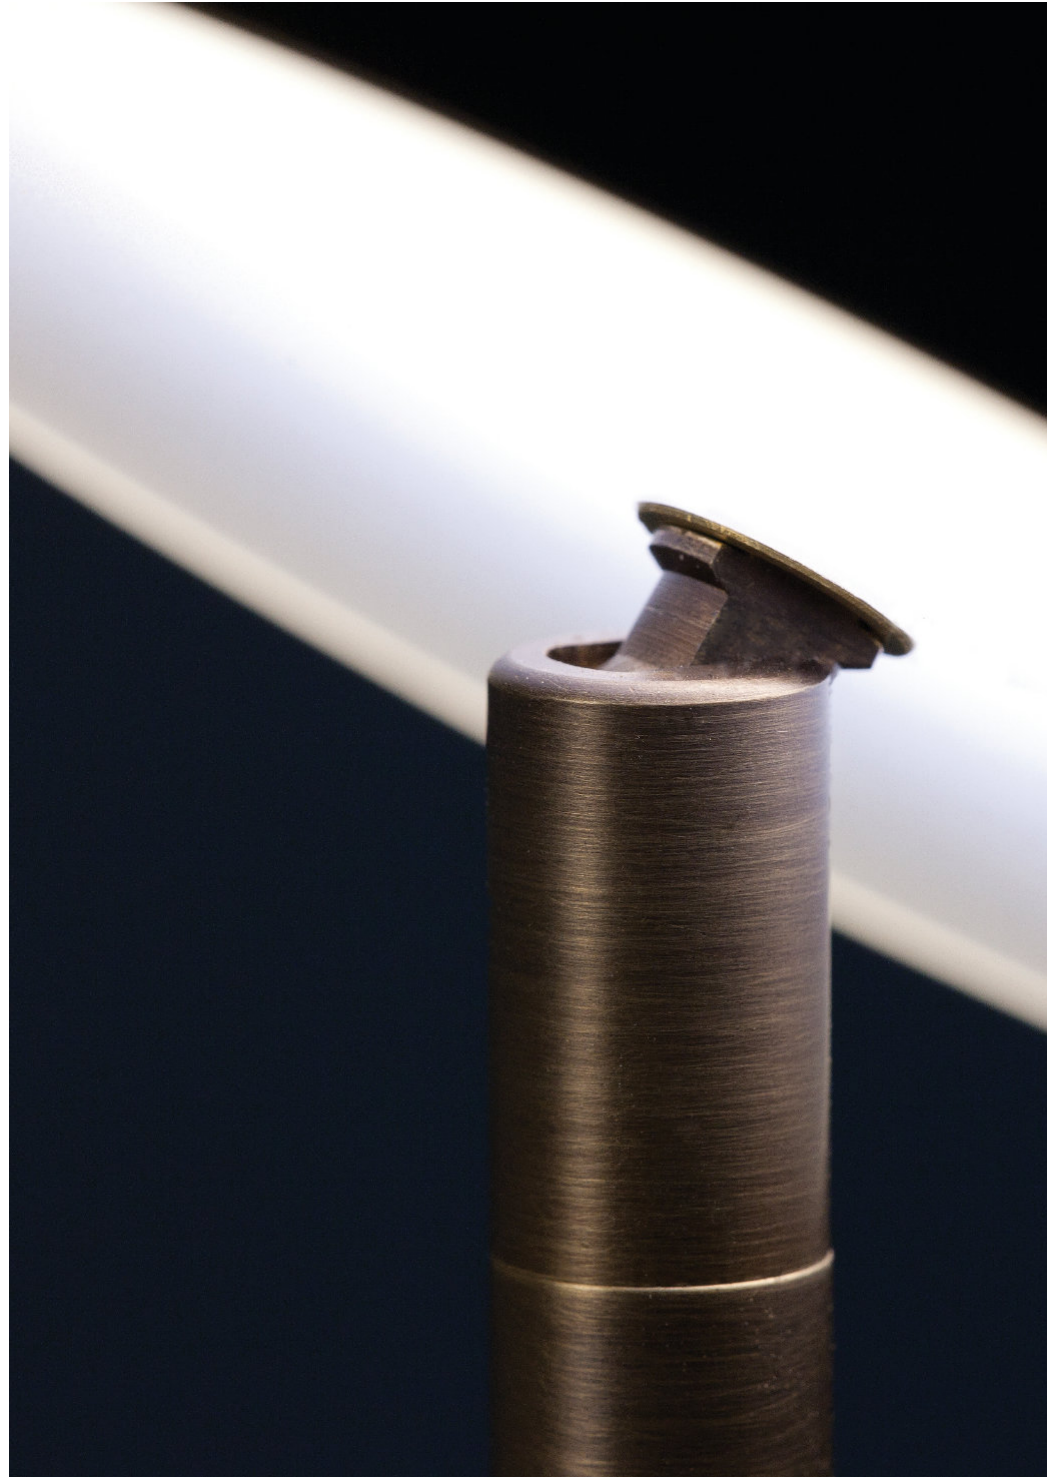

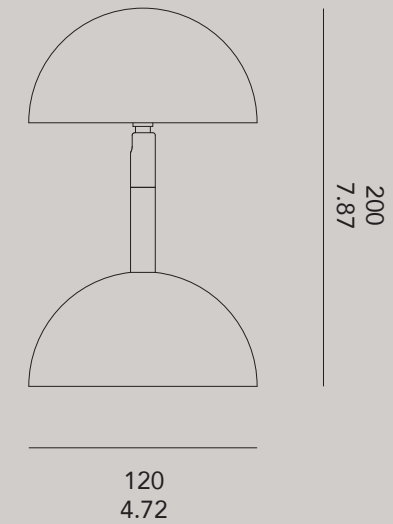

°diabolo



DBL.WH.30	white - 3000K LED
DBL.BK.30	black - 3000K LED
DBL.BRZ.30	bronze - 3000K LED
DBL.BRS.30	brass - 3000K LED
DBL.RAL.30	other RAL colors - 3000K LED
DBL.TBL.WH.30	table model - white - 3000K LED
DBL.TBL.BK.30	table model - black - 3000K LED
DBL.TBL.BRZ.30	table model - bronze - 3000K LED
DBL.TBL.BRS.30	table model - brass - 3000K LED
DBL.TBL.RAL.30	table model - other RAL colors - 3000K LED
DBL.WH.27	white - 2700K LED
DBL.BK.27	black - 2700K LED
DBL.BRZ.27	bronze - 2700K LED
DBL.BRS.27	brass - 2700K LED
DBL.RAL.27	other RAL colors - 2700K LED
DBL.TBL.WH.27	table model - white - 2700K LED
DBL.TBL.BK.27	table model - black - 2700K LED
DBL.TBL.BRZ.27	table model - bronze - 2700K LED
DBL.TBL.BRS.27	table model - brass - 2700K LED
DBL.TBL.RAL.27	table model - other RAL colors - 2700K LED


material: painted aluminum - weight: 1,2 kg / 42,3 oz - 230VAC - 5W - dimmable 1-10V

°i-light

i-light is a thin, hanging tubular light fixture with an incorporated LED-light. The small loose-hanging chrome-plated sphere creates an unusual light and shadow play. The lamp can be used as trim lights, hanging lights, or – when several are combined – as a chandelier. When the tubes are hung low, the reflection of the chrome-plated rods produces a 'starry sky effect'.


Design by Bart Lens



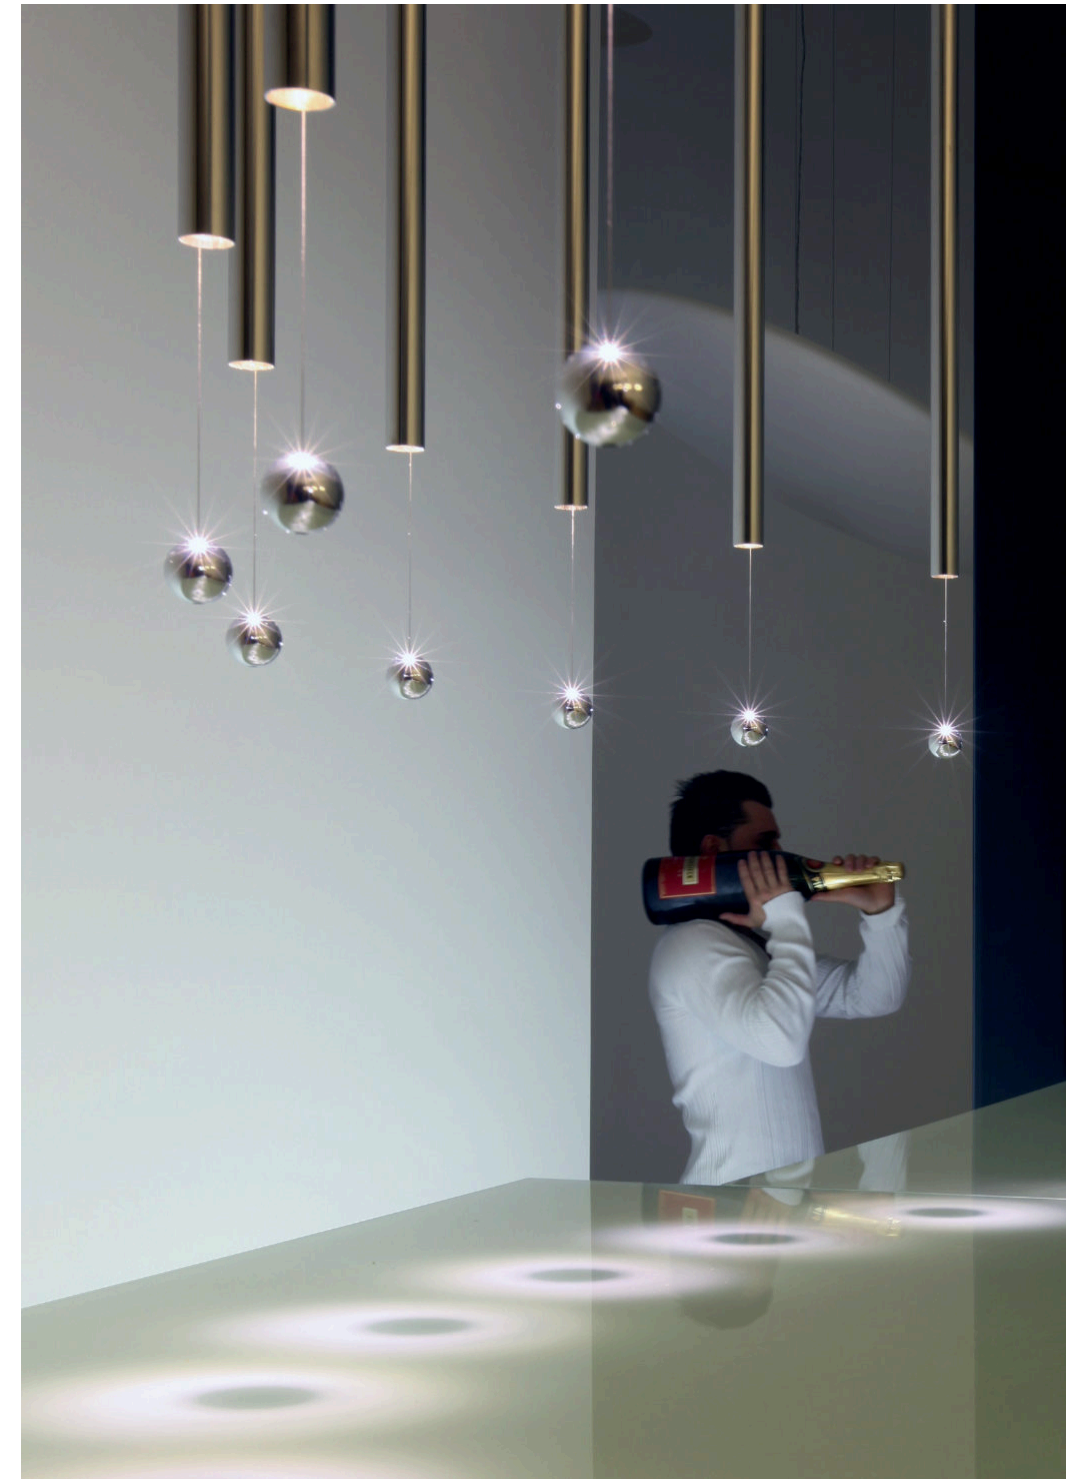



°i-light



IL

i-light, 2700K

material: chromed brass - weight: 1,4 kg / 50 oz - included: 2 m cable & ceiling rose - 24VDC - max. 2W - excl. power supply

eden
design