

°ledline 16^{new}

Refined, architectural, and exceptionally slender — °ledline 16 is a minimalist linear luminaire designed to blend seamlessly into contemporary interiors while delivering precise, high-quality illumination.

At just 16mm in width, °ledline 16 offers an elegant lighting solution that feels almost invisible in space. Its ultra-slim profile makes it ideal for kitchens, workspaces, hospitality settings, retail environments, and residential applications where clean lines matter.





flat cap





round cap 1



round cap 2

scale 1/1 on print

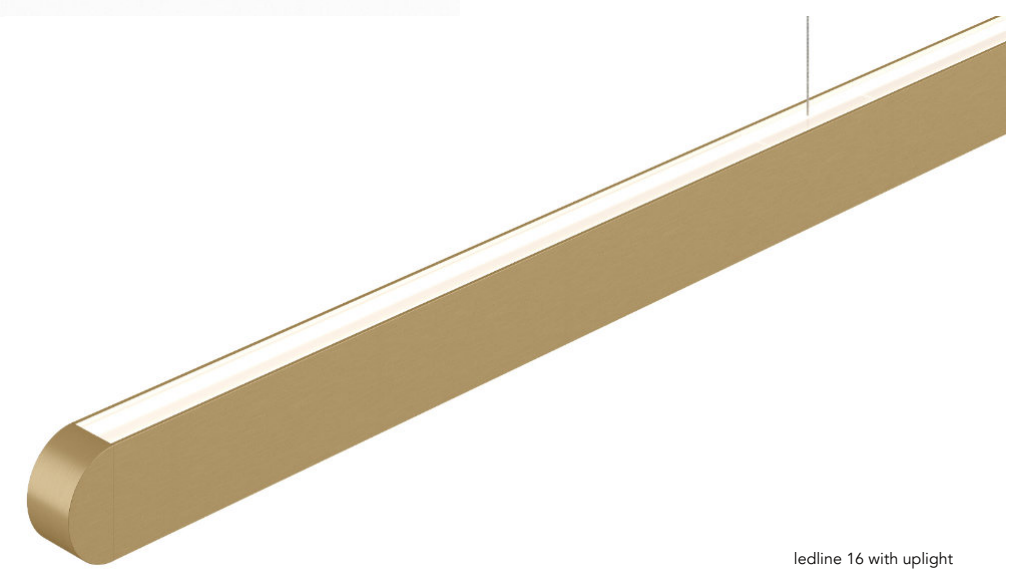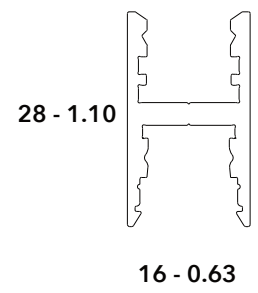


ledline 16 with uplight

°ledline 16

materials	aluminum / PC
weight	950 gr/m
voltage	24 Vdc
wattage	opal 28W/m (with uplight +10W/m) spot 20W/m (with uplight +10W/m)
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<19 for spot

IP20  CE ENEC

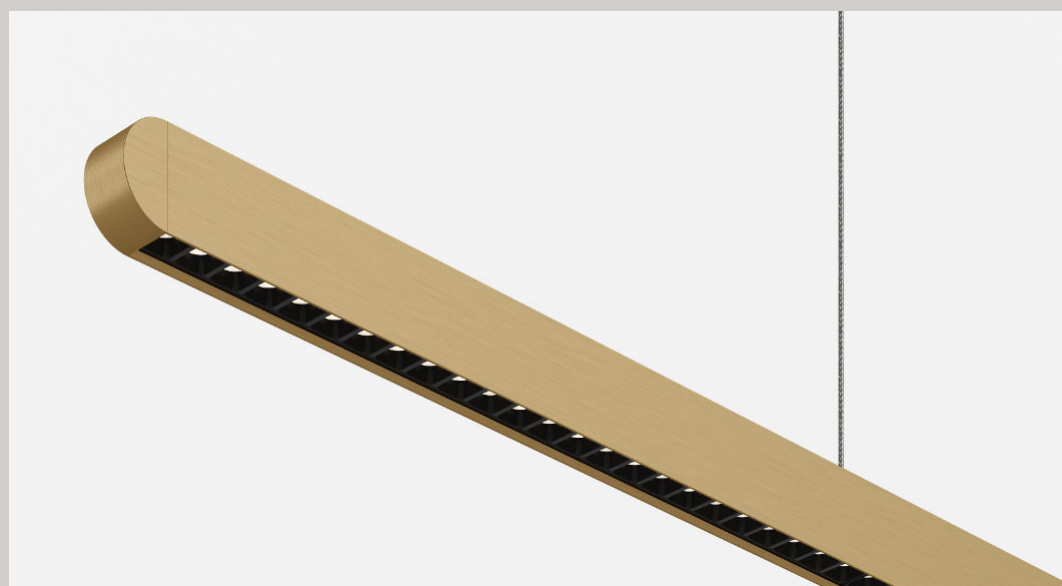

Order Code

Pendant or Surface

03504.AA00.BBBB.CCC.EE
03505.AA00.BBBB.CCC.EE
03506.AA00.BBBB.CCC.EE
03507.AA00.BBBB.CCC.EE
03508.AA00.BBBB.CCC.EE
03509.AA00.BBBB.CCC.EE
03510.AA00.BBBB.CCC.EE
03511.AA00.BBBB.CCC.EE

Ledline 16 1120 mm
Ledline 16 1400 mm
Ledline 16 1680 mm
Ledline 16 1960 mm
Ledline 16 2240 mm
Ledline 16 2520 mm
Ledline 16 2800 mm
Ledline 16 custom length (combination of standard lengths)

Required accessories

End Cap

03530.AA00
03531.AA00
03532.AA00

Ledline 16 end cap flat (set of 2)
Ledline 16 end cap round 1 (set of 2)
Ledline 16 end cap round 2 (set of 2)

Canopy

91010.AA00
91004.AA00

Ledline 16 canopy surface mount
Ledline 16 canopy recessed

Connector

03580

Mechanical connector 180°

Remote drivers 24V

See page 133

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color




CCC	Optic	for 3000 K
001	frosted ice opal	1800 lm/m
306	30° matt black reflector	460 lm / module 280mm
506	50° matt black reflector	440 lm / module 280mm
307	30° matt white reflector	460 lm / module 280mm
507	50° matt white reflector	440 lm / module 280mm

EE Uplight

00 none
01 uplight (same K as downlight)
remark: separately dimmable with extra driver
two power feeds required

00	Suspension
00	surface
01	pendant

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K
TW00	tunable white (on request)

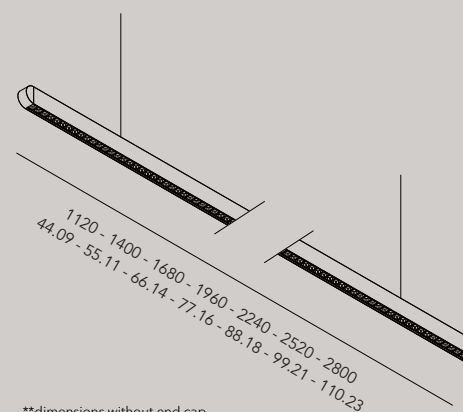


**dimensions without end cap

*for round cap 1

°ledline 16 mono

materials	aluminum / PC
weight	180 / 360 / 540 gr
voltage	110-230 Vac
wattage	7,5W - 15W - 22,5W
dimming	dali, 0/1-10V, phase cut, casambi (remote driver required)
ugr	<19

IP20  CE ENEC

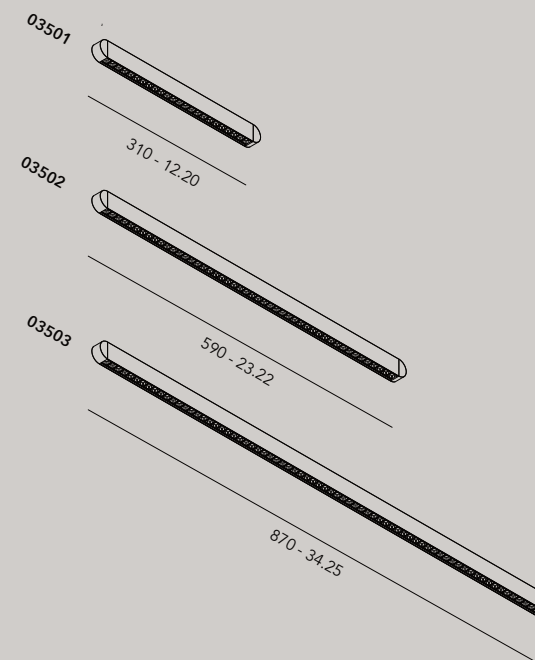

Order Code

Monopoint

03501.AA00.BBBB.CCC
 03502.AA00.BBBB.CCC
 03503.AA00.BBBB.CCC
 03504.AA00.BBBB.CCC
 03505.AA00.BBBB.CCC
 03506.AA00.BBBB.CCC
 03507.AA00.BBBB.CCC
 03508.AA00.BBBB.CCC
 03509.AA00.BBBB.CCC

Ledline 16 280 mm - round 1 end caps (remote driver)
 Ledline 16 540 mm - round 1 end caps (remote driver)
 Ledline 16 840 mm - round 1 end caps (remote driver)
 Ledline 16 280 mm - round 2 end caps (remote driver)
 Ledline 16 540 mm - round 2 end caps (remote driver)
 Ledline 16 840 mm - round 2 end caps (remote driver)
 Ledline 16 280 mm - flat end caps (remote driver)
 Ledline 16 540 mm - flat end caps (remote driver)
 Ledline 16 840 mm - flat end caps (remote driver)

AA	Color disk
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
03	painted custom NCS color

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	for 3000K, 280 mm
001	frosted ice opal	440 lm
306	30° matt black reflector	622 lm
506	50° matt black reflector	635 lm
307	30° matt white reflector	622 lm
507	50° matt white reflector	635 lm