

°bloc

°bloc

179

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne

new

new







°bloc.stripe & °bloc white
Interior Casa Vero - light design Jeune Concept







°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten



°bloc.spot (oak) & °bloc (carrara)



°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC




°bloc.spot - brass brushed & °bloc walnut
House Aalst, Belgium - architect Pascal François - photograph by Jeroen Verrecht



°bloc

191


set-up guide

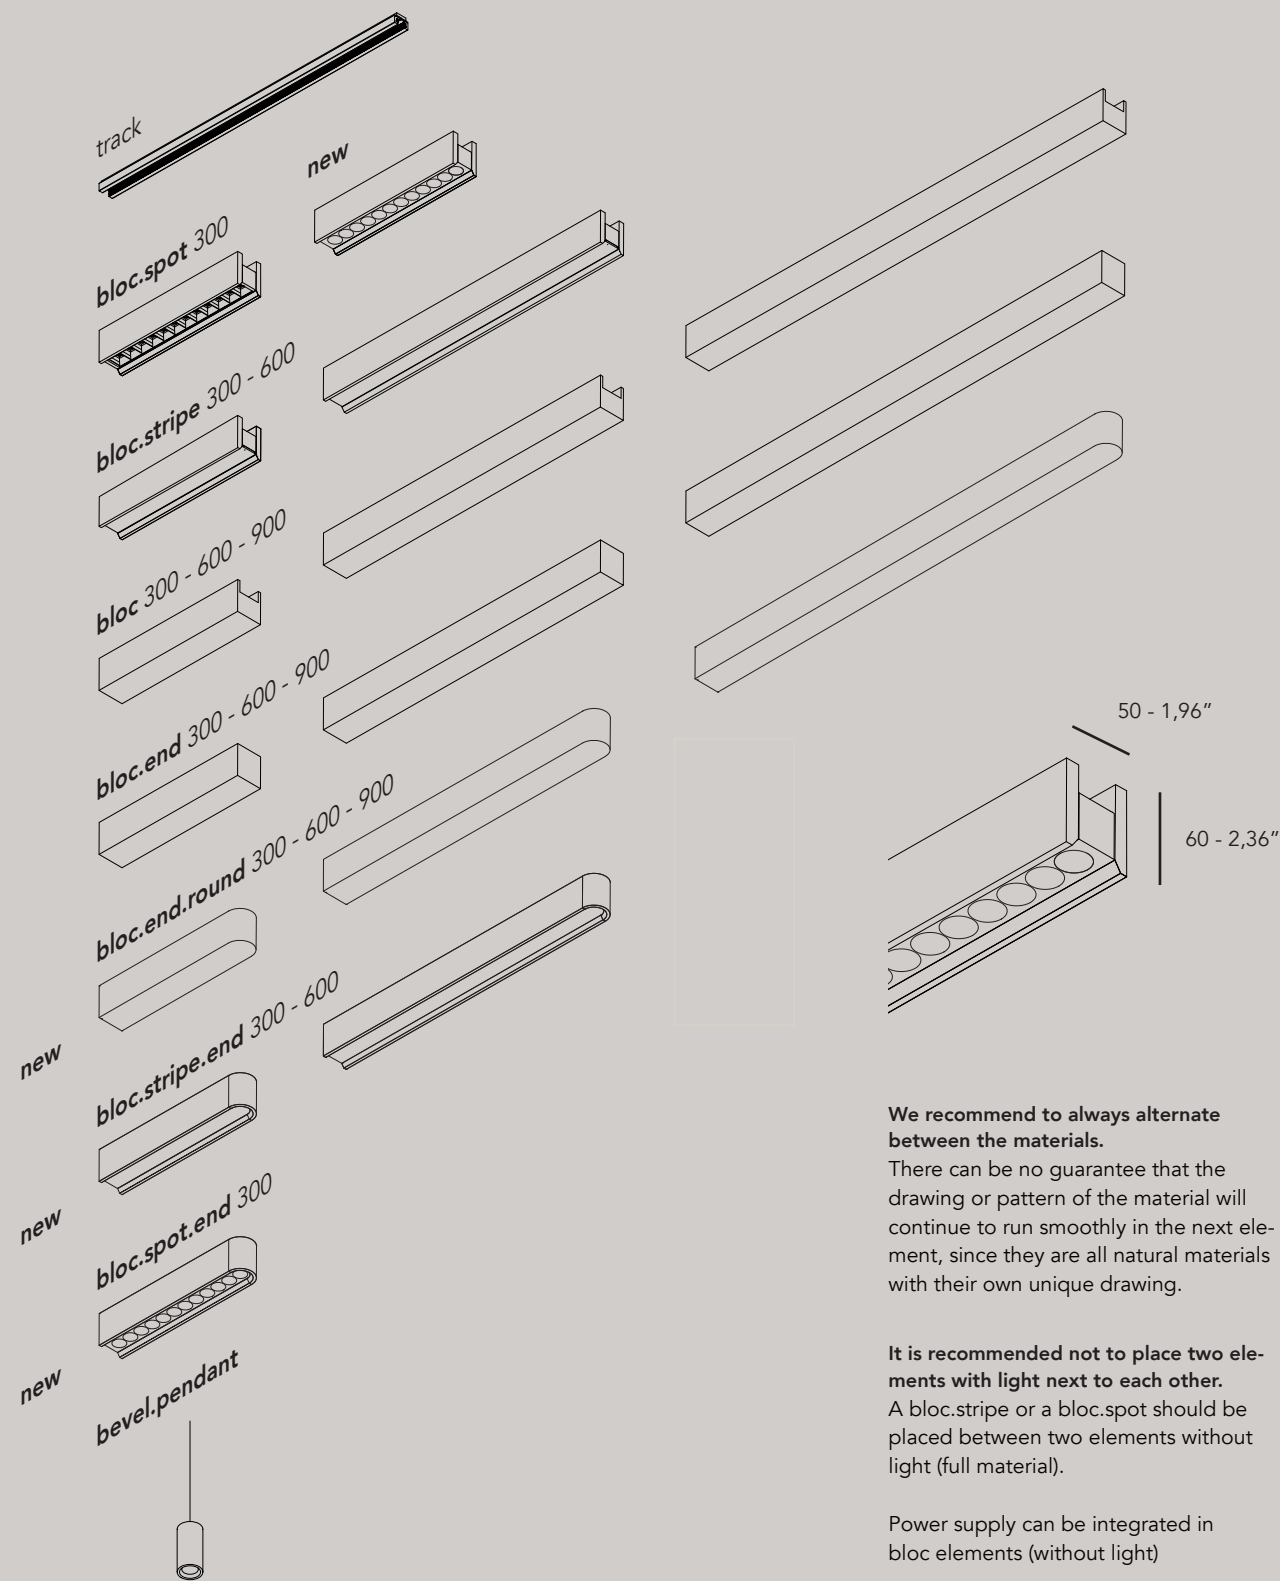

We recommend to always alternate between the materials.
There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.
A bloc.stripe or a bloc.spot should be placed between two elements without light (full material).

Power supply can be integrated in bloc elements (without light)

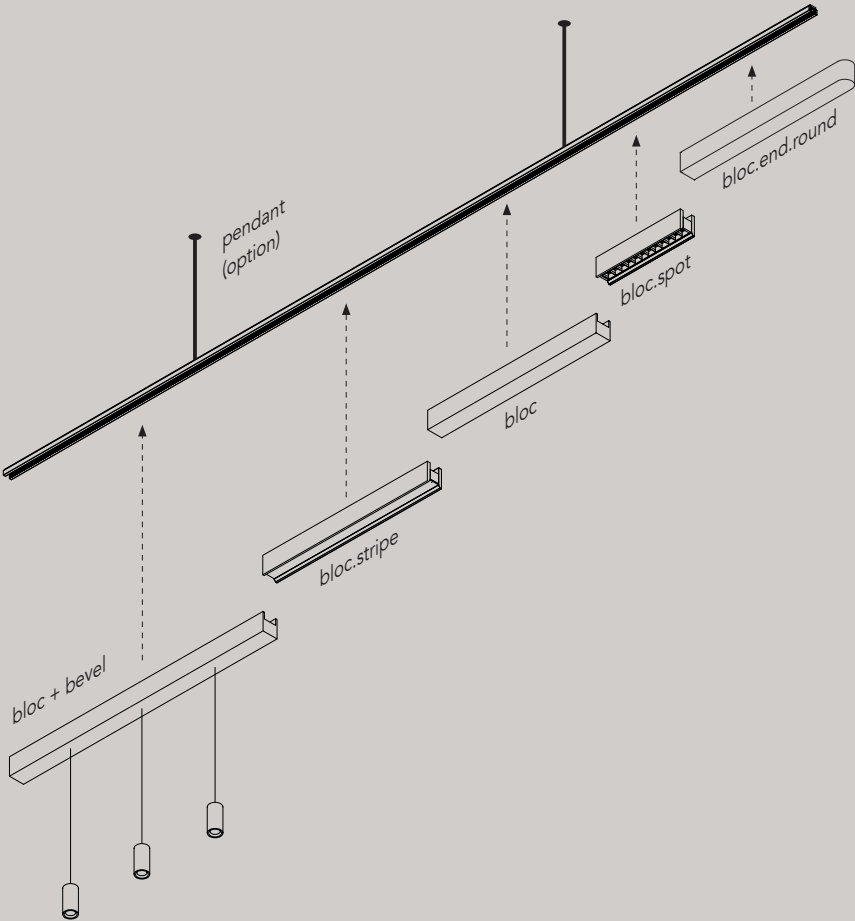


Order Code	BBBB	Length
20000.0100.BBBB bloc track black	0500	500 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

- Accessories**
- 20252.0000 bloc track pendant 2 m steel cable suspension (incl. elec. cable)
 - 20253.0000 bloc track pendant 2 m steel cable suspension (1 per meter)
 - 20254.0000 bloc track pendant 2 m bar suspension (incl. elec. cable)
 - 20255.0000 bloc track pendant 2 m bar suspension (1 per meter)

- 20220.0100 bloc track electrical feeder
- 20221.0100 bloc electrical joint 180°




Drivers remote	
90101.0000	Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
90102.0000	Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
90103.0000	Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
90104.0000	Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified
90110.0000	Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
90111.0000	Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed
90001.0000	0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
90002.0000	Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
90003.0000	Dali opto insulator for galvanic isolation

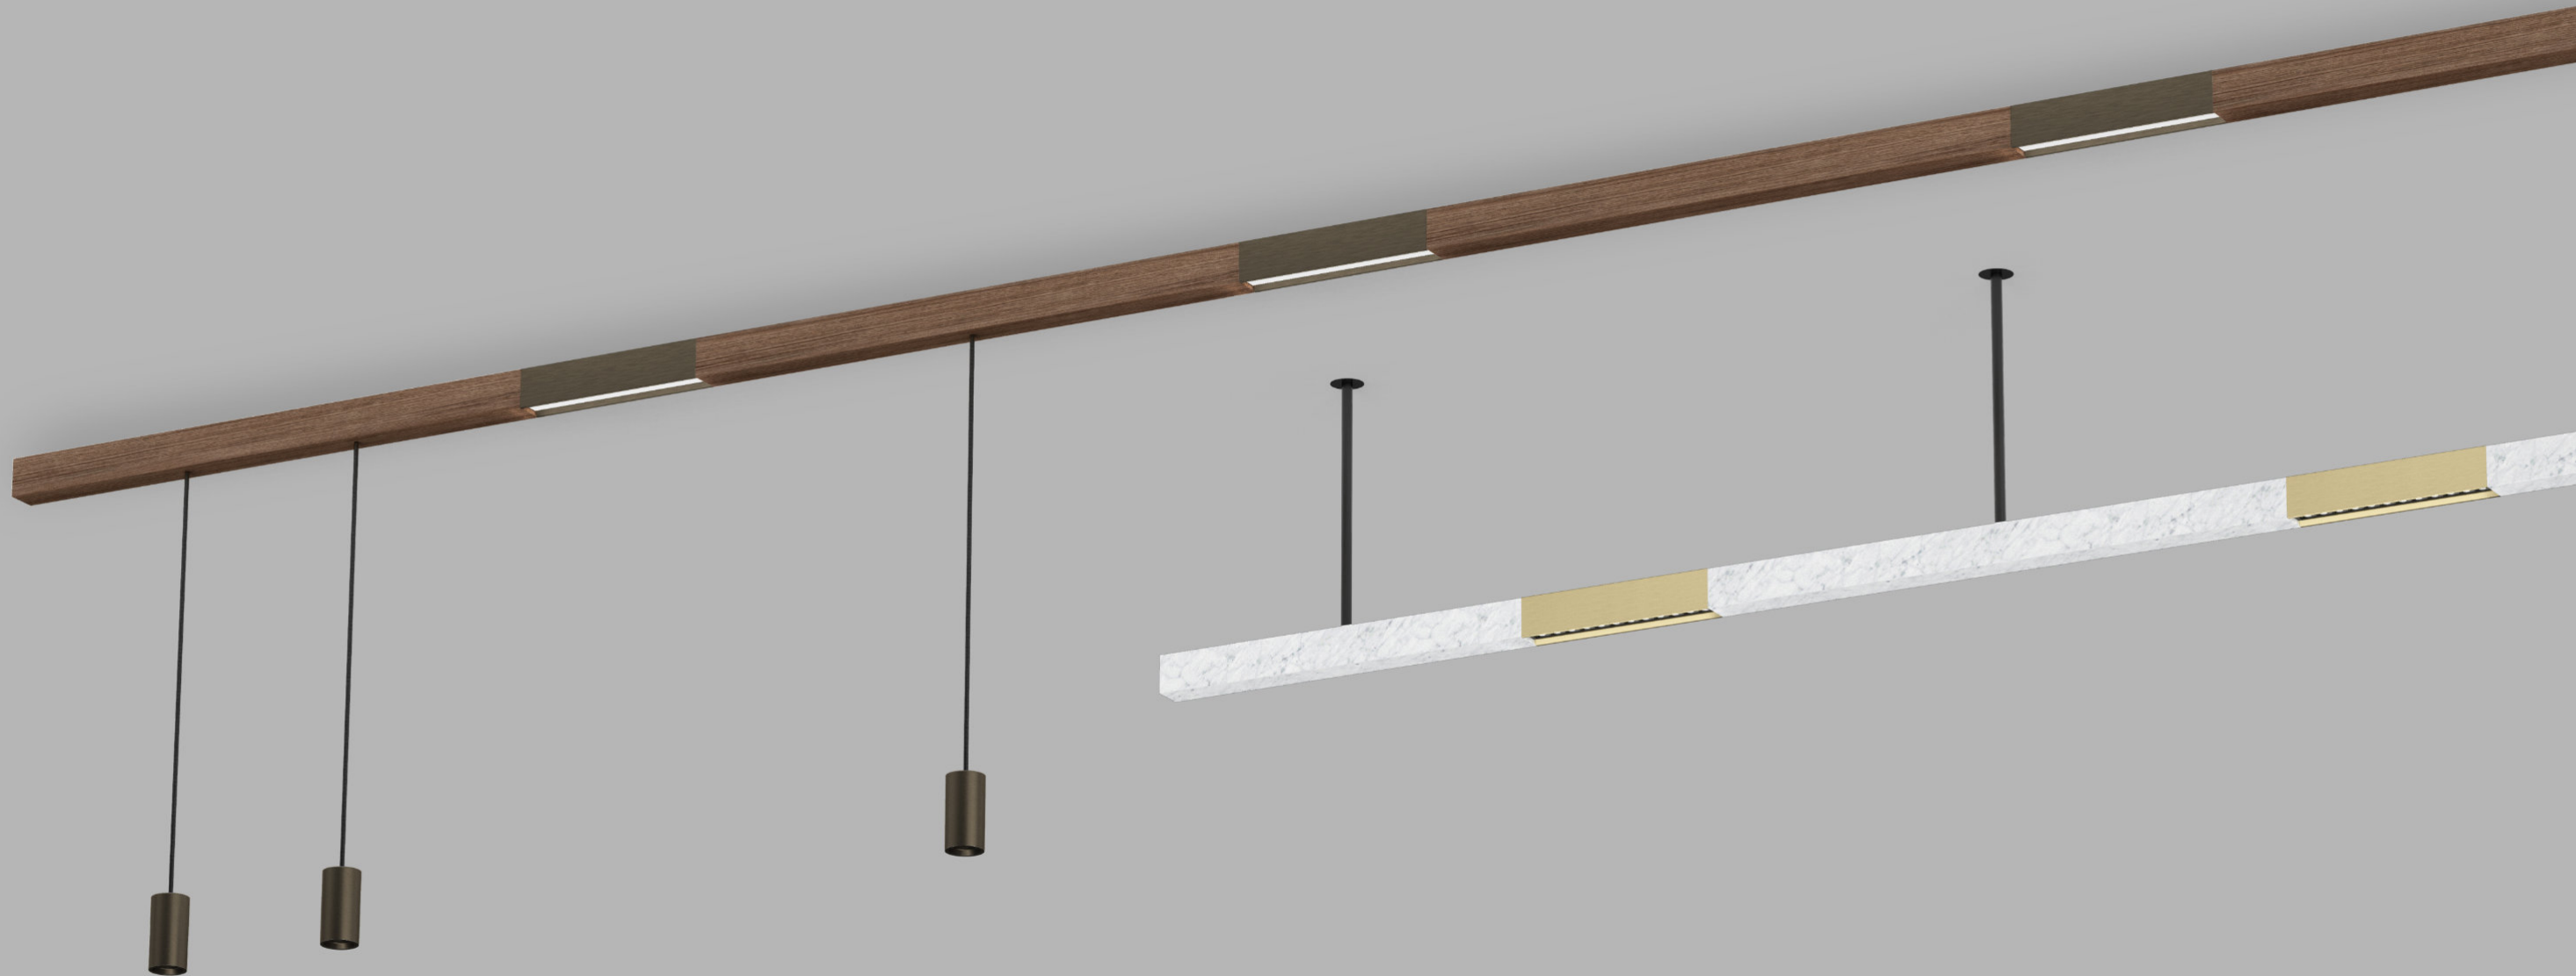

°bloc.spot

materials	aluminum / PC
weight	from 0,5-5kg
voltage	48 Vdc
ugr	<10
wattage	13W - 26W (high output)
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   



Order Code

- 20300**.AA00.BBBB.CCC.DD
bloc spot 300 - square reflector
- 20301**.AA00.BBBB.CCC.DD
bloc spot 300 - square reflector high output
- 20310**.AA00.BBBB.CCC.DD
bloc spot 300 - round reflector
- 20311**.AA00.BBBB.CCC.DD
bloc spot 300 - round reflector high output
- 20312**.AA00.BBBB.CCC.DD
bloc spot 300 - round reflector & round end
- 20313**.AA00.BBBB.CCC.DD
bloc spot 300 - round reflector & round end high output



AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painting custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM through interface)
CA	casambi control

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc.stripe

materials aluminum / PC
weight from 0,5-5kg
voltage 48 Vdc
wattage 8,2W - 16,4W (high output) for 300mm
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi


IP20   



°bloc stripe 300 - brass alu brushed + natural oak



°bloc stripe 600 - brass alu brushed + carrara bianco

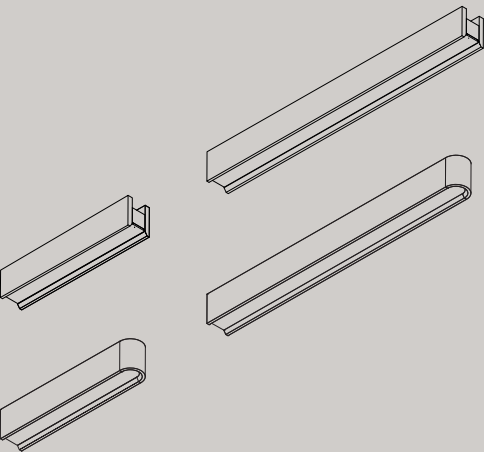

- Order Code**
20400.AA00.BBBB.CCC.DD bloc stripe 300
20401.AA00.BBBB.CCC.DD bloc stripe 300 high output*

20404.AA00.BBBB.CCC.DD bloc stripe 300 end
20405.AA00.BBBB.CCC.DD bloc stripe 300 end high output*

20410.AA00.BBBB.CCC.DD bloc stripe 600
20411.AA00.BBBB.CCC.DD bloc stripe 600 high output*

20414.AA00.BBBB.CCC.DD bloc stripe 600 end
20415.AA00.BBBB.CCC.DD bloc stripe 600 end high output*

*only available for alu finishes & black/white paint



brass alu brushed, round end + carrara bianco



bronze alu brushed + oak classic brown dye


AA	Finish		
01	black		
02	white		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
27	gun metal alu brushed		
28	nickel alu brushed		
32	copper alu brushed		
03	painted custom NCS color		
BBBB	Light	Output	High output*
9527	cri >95, 2700K	880lm - 310cd	1610lm - 560cd
9530	cri >95, 3000K	780lm - 370cd	1430lm - 680cd
9540	cri >95, 4000K - on request		
CCC	Optic		
001	frosted ice		
002	microprism		
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM through interface)		
CA	casambi control		

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bevel bloc

materials	aluminum / PC
weight	600gr / 1.32lb
voltage	48 Vdc
wattage	8,2 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

IP20   ENEC

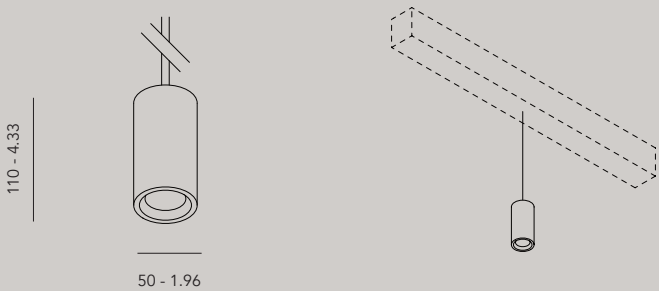

Order Code

20500.AA00.BBBB.CCC.DD bevel
20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 202)

max. 1 °bevel on bloc.300
max. 2 °bevel on bloc.600
max. 3 °bevel on bloc.900

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
CCC	Optic	Output*
300	20°	430lm
450	30°	525lm
600	50°	690lm
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM through interface)	
CA	casambi control	

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc

Order Code

20600.AA00 bloc 300

20610.AA00 bloc 600

20620.AA00 bloc 900

20601.AA00 bloc 300 end

20611.AA00 bloc 600 end

20621.AA00 bloc 900 end

20603.AA00 bloc 300 end round


20613.AA00 bloc 600 end round

20623.AA00 bloc 900 end round

bloc
300-600-900

bloc end
300-600-900

bloc end round
300-600-900

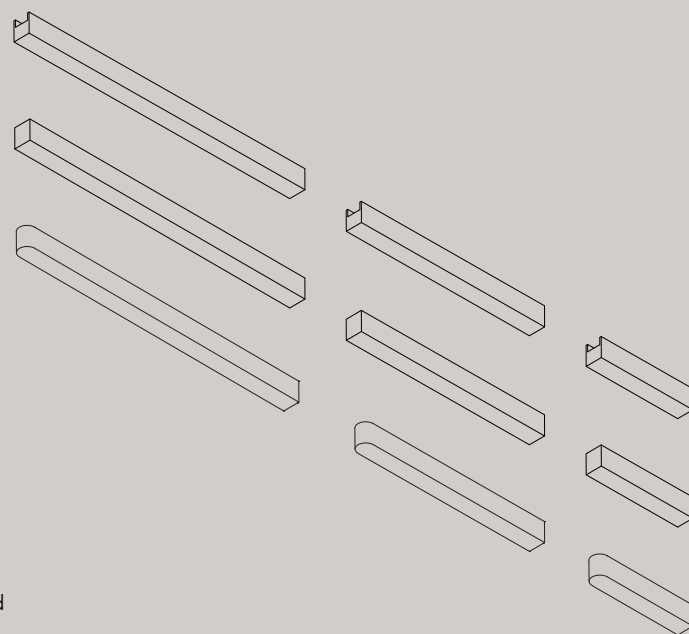


AA	Finish
01	black
02	white
40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye
61	carrara bianco extra, honed

Custom material on request
Oak can be dyed in reference color

00	Driver
00	not included
01	power supply 100W included

°bloc colors

203

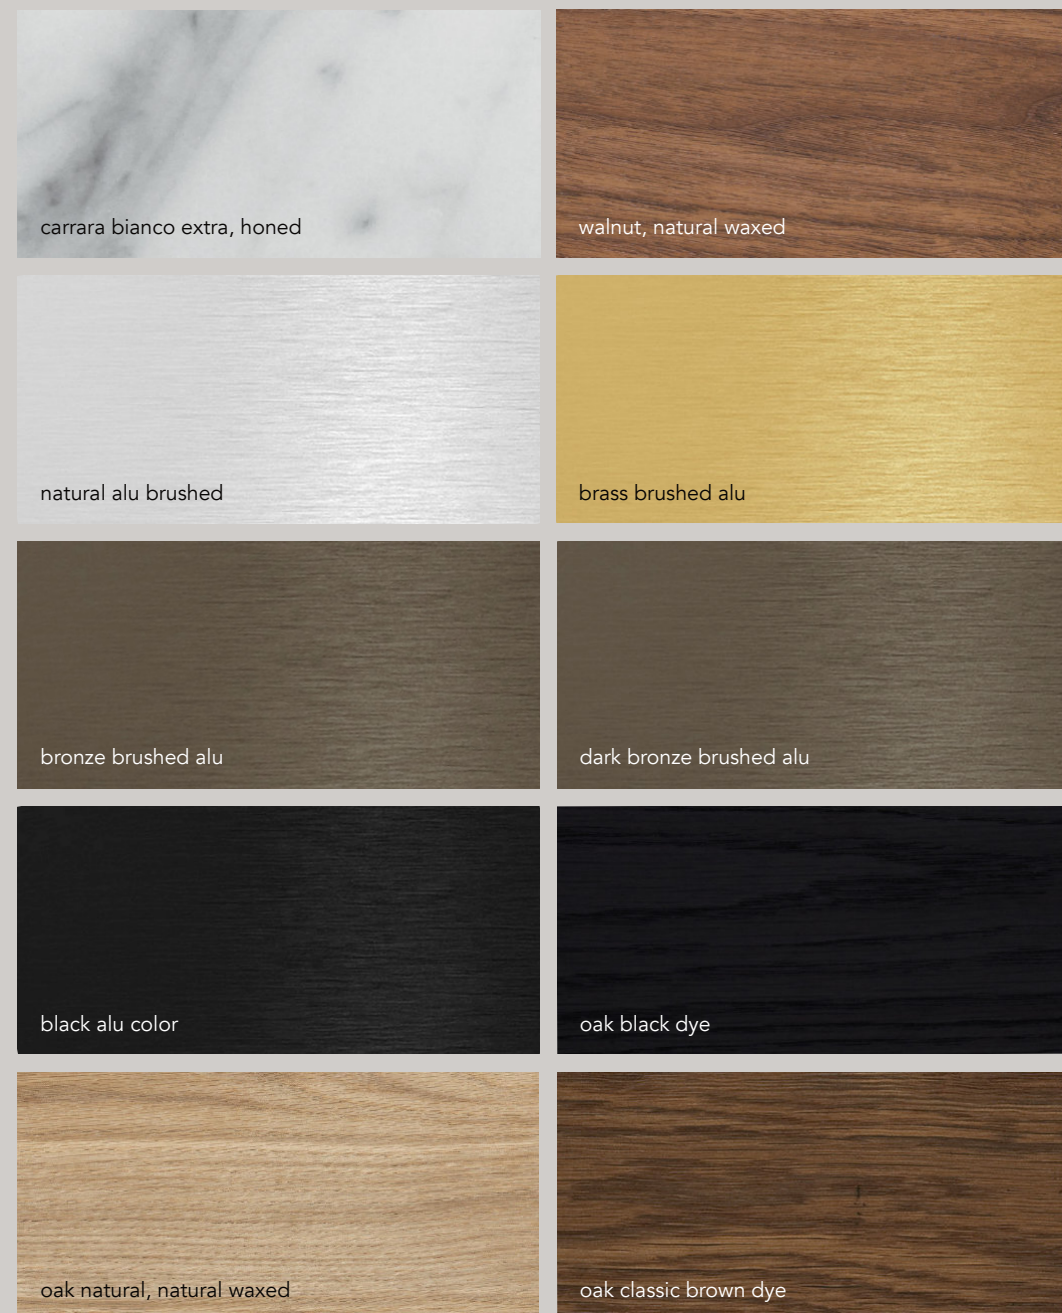

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

°bloc.line

Bloc is now available as full length profile.
Choose your down- and uplights.



Wall





300, 600 mm
or custom



°bloc.mono

materials aluminum coated / PC
weight from 0,5-5kg
voltage 230 Vac (110V on request)
wattage 8,2W - 16,4W (high output)
power supply integrated in fixture
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   

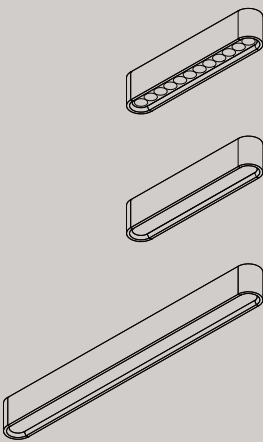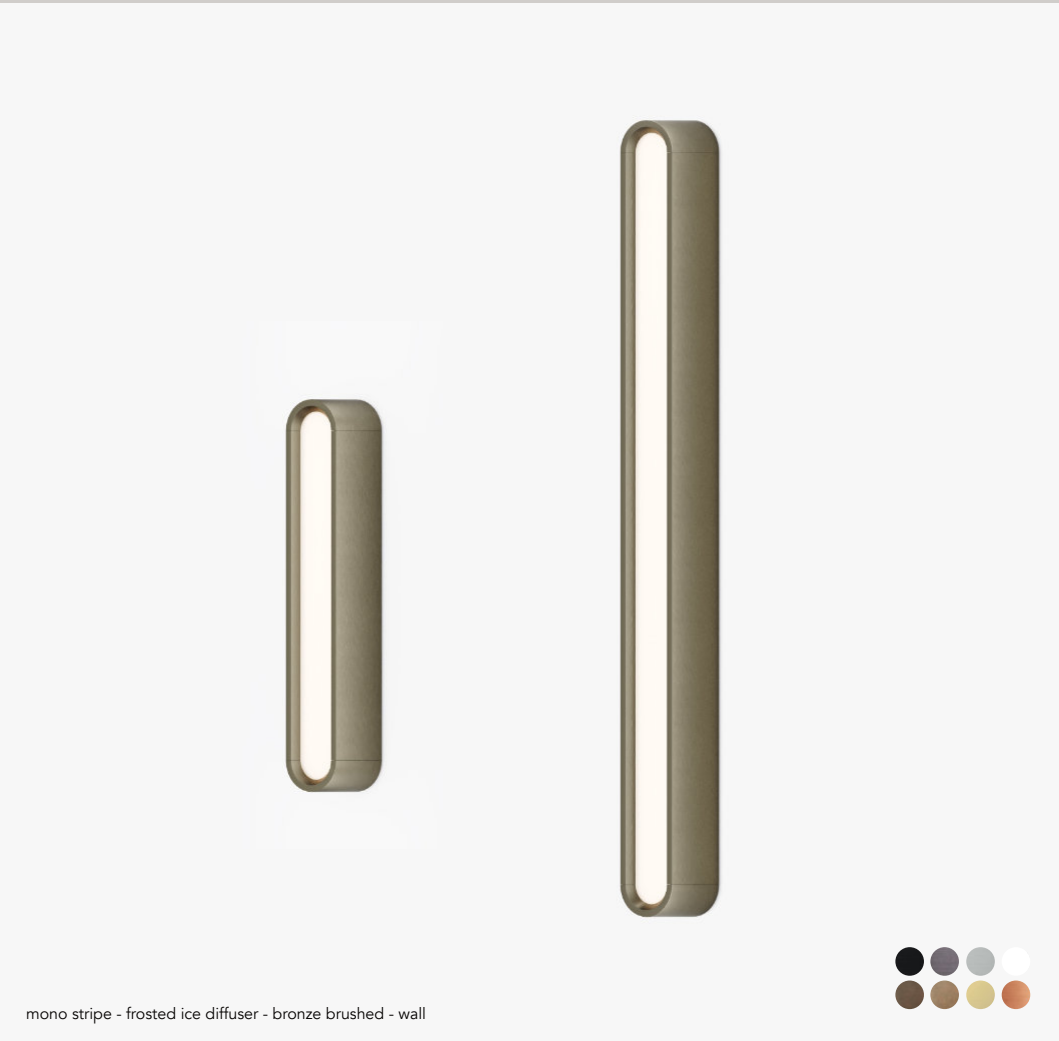

- Order Code**
20700.AA00.BBBB.CCC.DD bloc spot mono 300
20701.AA00.BBBB.CCC.DD bloc spot mono 300 high output

20702.AA00.BBBB.CCC.DD bloc stripe mono 300
20703.AA00.BBBB.CCC.DD bloc stripe mono 300 high output

20710.AA00.BBBB.CCC.DD bloc stripe mono 600
20711.AA00.BBBB.CCC.DD bloc stripe mono 600 high output

AA	Finish		
01	black		
02	white		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
27	gun metal alu brushed		
28	nickel alu brushed		
32	copper alu brushed		
03	paintned custom NCS color		
BBBB	Light		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
CCC	Optic	Output	High output
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		
CA	casambi control		

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.
** For stripe 300

°bloc.line

materials	aluminum / PC
weight	3 kg/lm
voltage	230 Vac (110V on request)
wattage	13W / 26W (high output) per spot or 28 W/m with diffuser
power supply	integrated in fixture
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20   



Order Code

20803.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, 3 spots
20830.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, diffuser

20804.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, 4 spots
20840.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, diffuser

20805.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, 5 spots
20850.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, diffuser

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color

00	Suspension
00	surface
01	pendant


BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Down Light	
001	frosted ice diffuser	2913lm/m
002	microprism diffuser	2913lm/m
200	20 deg spots	1090lm - 5650cd/spot
300	30 deg spots	1055lm - 3310cd/spot
600	60 deg spots	1090lm - 1200cd/spot

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

EE	Up Light (28 W/m)
01	none
02	uplight (same color light as downlight)


Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

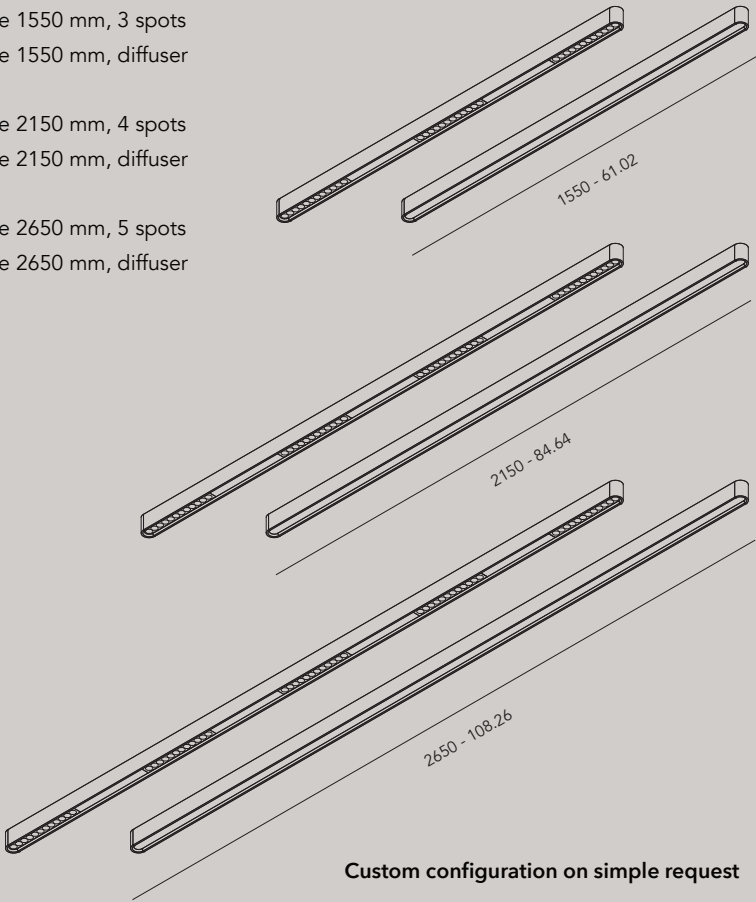

°suspension

213

Steel cable suspension surface (adjusment height at fixture)




20256 Cylindrical nickle ceiling attachment with 1 mm steel cable - 2 m

20257 Cylindrical nickle ceiling attachment with 1 mm steel cable - 6 m



diam. 14mm x 16 mm

Round rosas with steel cable suspension (adjusment height at fixture)



62 mm

20260.01 Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m

20260.02 White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m

20260.03 Black round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

20260.04 White round rosas 62 mm with 1 mm steel cable + white 5x0,75 mm² cable - 2 m

20260.05 White round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

20261.01 Black round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m

20261.02 White round rosas 62 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m

20261.03 Black round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

20261.04 White round rosas 62 mm with 1 mm steel cable + white 5x0,75 mm² cable - 6 m

20261.05 White round rosas 62 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

ø 62 x 32



82 mm

20262.01 Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m

20262.02 White round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 2 m

20262.03 Black round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

20262.04 White round rosas 82 mm with 1 mm steel cable + white 5x0,75 mm² cable - 2 m

20262.05 White round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 2 m

20263.01 Black round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m

20263.02 White round rosas 82 mm with 1 mm steel cable + transparant 5x0,75 mm² cable - 6 m

20263.03 Black round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

20263.04 White round rosas 82 mm with 1 mm steel cable + white 5x0,75 mm² cable - 6 m

20263.05 White round rosas 82 mm with 1 mm steel cable + black 5x0,75 mm² cable - 6 m

ø 82 x 32



° ceiling rose

Order Code Surface



PARTNUMBER.0100 black
PARTNUMBER.0200 white



Order Code Recessed

91003.AA00 recessed canopy 50 mm
91002.AA00 recessed canopy 80 mm
91004.AA00 recessed canopy 68 mm

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color

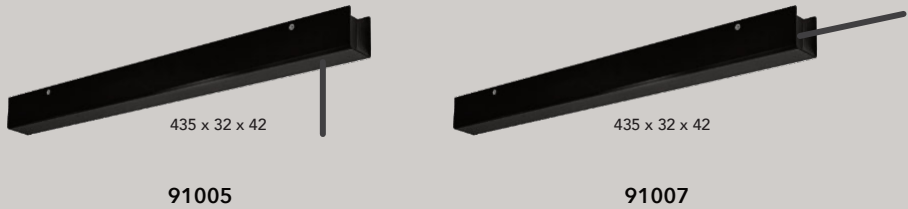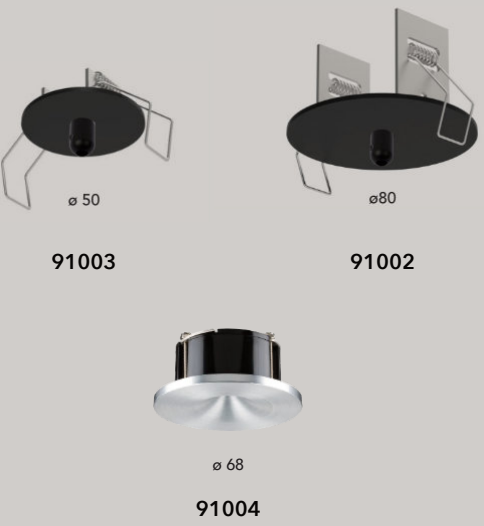

Only the ceiling box, to be combined with a suitable power supply.

91005.0100 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - black
91005.0200 Surface driver ceiling box - lateral cable entry - 435x42x32 mm - white

91007.0100 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - black
91007.0200 Surface driver ceiling box - cable entry bottom - 435x42x32 mm - white

- Suitable power cable:
- Transparant power cable 5x75 mm²

- Black textile power cable 5x75 mm²
- Suitable steel cable:
- Suspension steel cable 0,6 mm (plug)

- Suspension steel cable 1 mm (blocline)