

°cd

°cd is a spot, especially developed for cast concrete ceilings.

This collection of spotlights is almost invisibly integrated into the ceiling and can also be combined with a ventilation nozzle.

It offers a solution for the proliferation of surface-mounted devices for ceiling techniques; usually in various sizes and shapes, not compatible with each other.

The spots can easily be mounted in drilled or poured holes in the ceiling. An extra advantage is that the character of a concrete ceiling is additionally exposed.






°cd / architect kontekst - photograph by cafeine






°cd / Rubenshuis, Hasselt - architect Rubens-Frederix architects - photograph by etre moderne



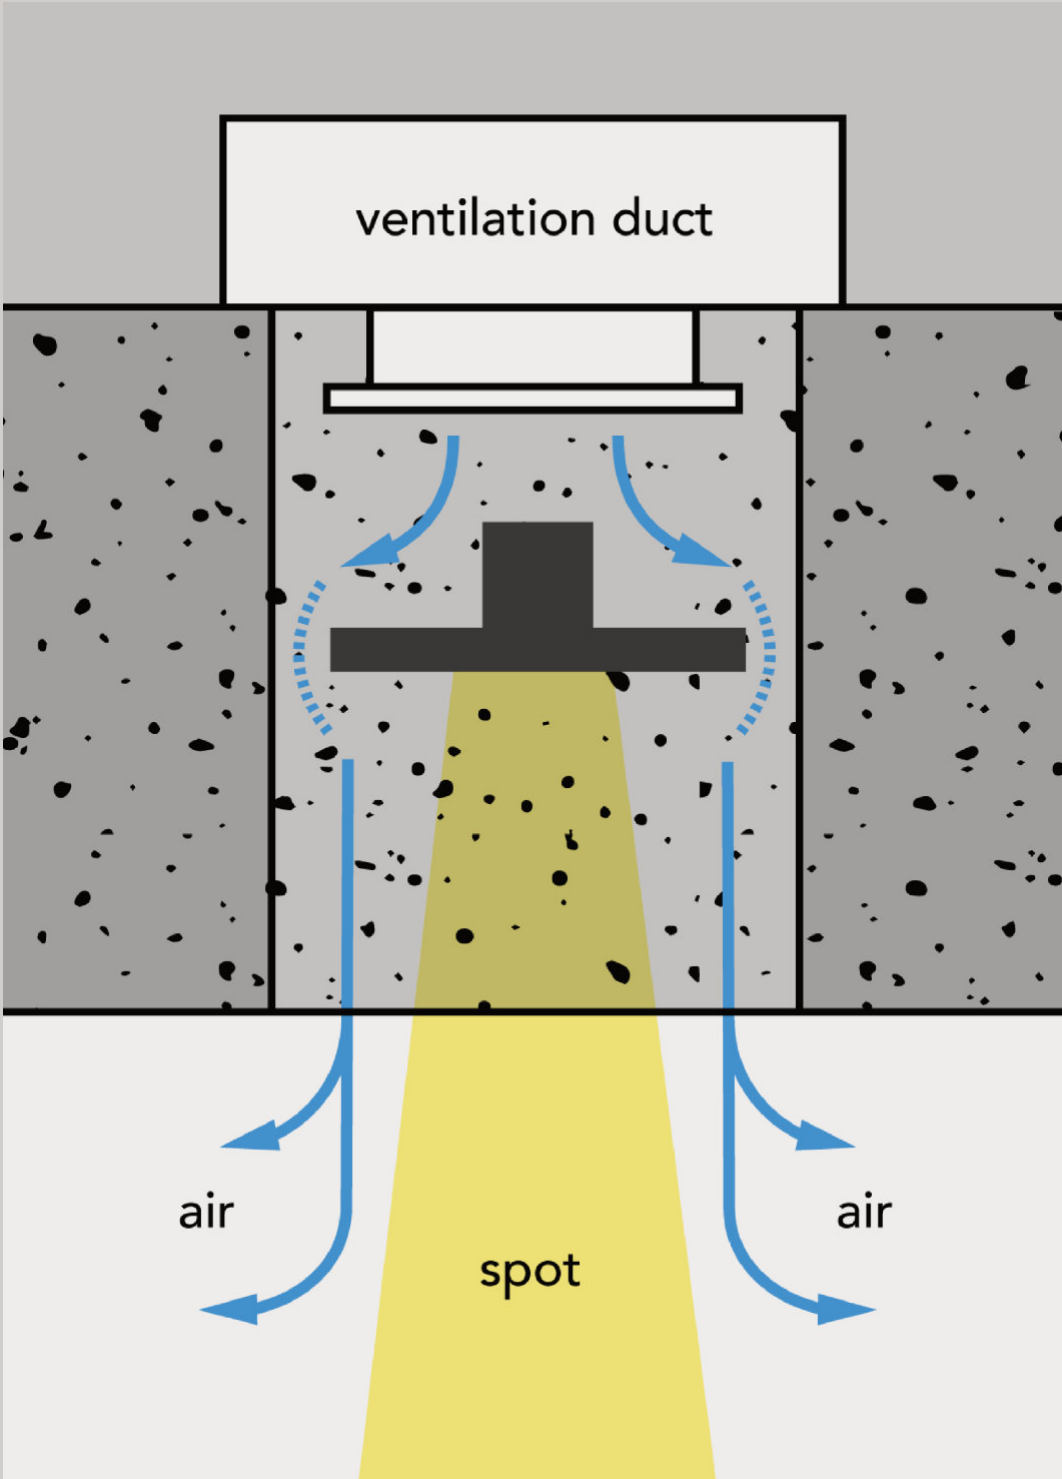

Scheme ventilation

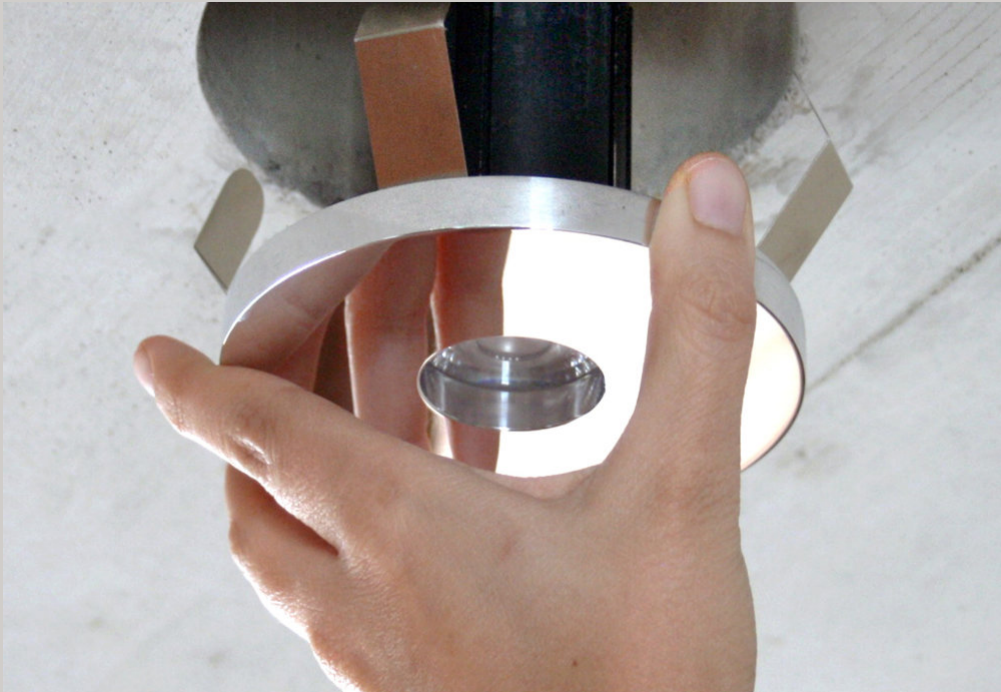

Easy installation




Smaller disc (105 mm) to use with ventilation system / mold has diameter of 135 mm

°cd

material	aluminum, oak
weight	0,8 - 1,6 kg / 0,52 - 1,04 lb
voltage	240 Vac
cri	>90
wattage	9W
lumen	700 lm
dimming	phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20   

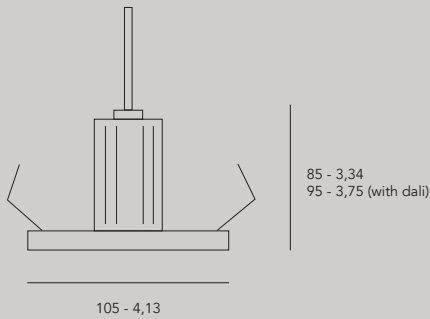

Order Code

04200.AA00.BBBB.CCC.DD diameter 105 mm
04203.AA00.BBBB.CCC.DD diameter 105 mm IP44
(to use with ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request


CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali

Accessories

04210.0000 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 340mm incl.
04210.0001 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 160mm incl.

04213 universal control valve for 125 system

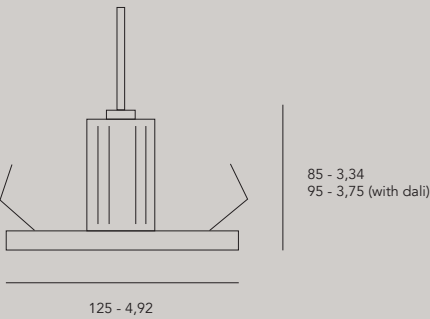

Order Code

04201.AA00.BBBB.CCC.DD diameter 125 mm
04204.AA00.BBBB.CCC.DD diameter 125 mm IP44
(whitout ventilation system)

AA	Finish
01	black
02	white
22	aluminum brushed
34	aluminum polished
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
41	oak natural
42	oak classic brown
43	oak black

BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

DD	Dimming
PH	phase cut
DA	dali



04213



04210

°cd+

°cd is a spot that was especially developed for cast concrete ceilings at first.

This new version °cd+ can also be recessed into other types of ceilings and shows the elegant disc.


The spots can easily be mounted in drilled holes in the ceiling. Different aluminum finishes are available to match your interior.



°cd+

material	aluminum, oak
weight	0,8 - 1,6 kg / 0,52 - 1,04 lb
voltage	240 Vac
cri	>90
wattage	9W
lumen	700 lm
dimming	phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20   

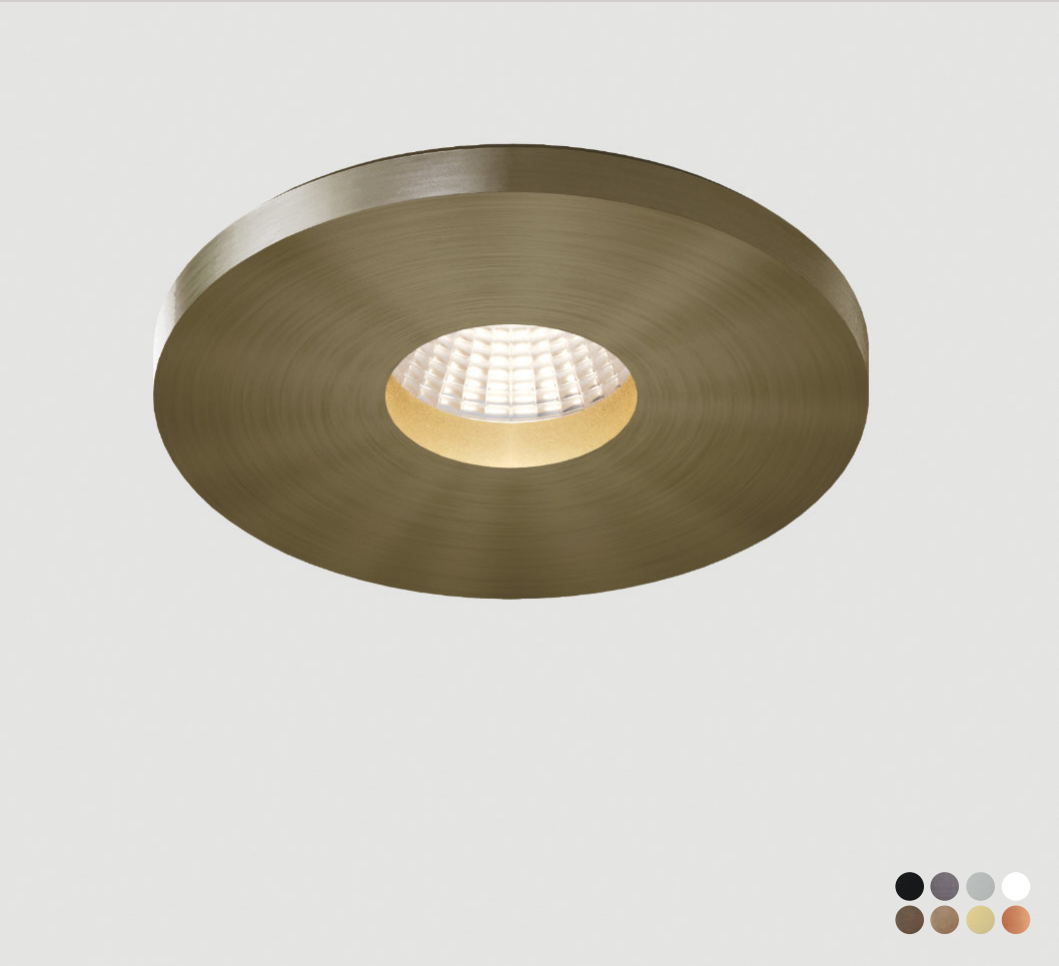

Order Code
04202.AA00.BBBB.CCC.DD diameter 105 mm

AA	Finish	
01	black	
02	white	
22	aluminum brushed	
34	aluminum polished	
21	black alu brushed	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
41	oak natural	
42	oak classic brown	
43	oak black	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K on request	
CCC	Optic	Output*
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd
DD	Dimming	
PH	phase cut	
DA	dali	