

° on line

The classic.

The power of this light source lies in its slenderness and unobtrusiveness; the simplicity of the fixtures' design makes that it can be used anywhere. An innovative and state-of-the-art magnet and contact system makes that a wide variety of led-fixtures can be easily inserted or moved.

The led-fixtures are similar in style yet each one of them has its own character and lighting quality.

Eden Design was the first to introduce this magnet system on the market. First presentation was in 2010 on the designfair Interieur Kortrijk, Belgium.

This collection won several awards, such as:

- The Best of the Best Red Dot Award (2011)
- Design Plus powered by Light & Building (2012)
- Henry van de Velde Label (2010)

Design by Bart Lens



reddot design award
best of the best 2011




DESIGN PLUS
powered by: light+building





°online / Grey Office, Greece - architects eDje - photograph by Vangelis Paterakis

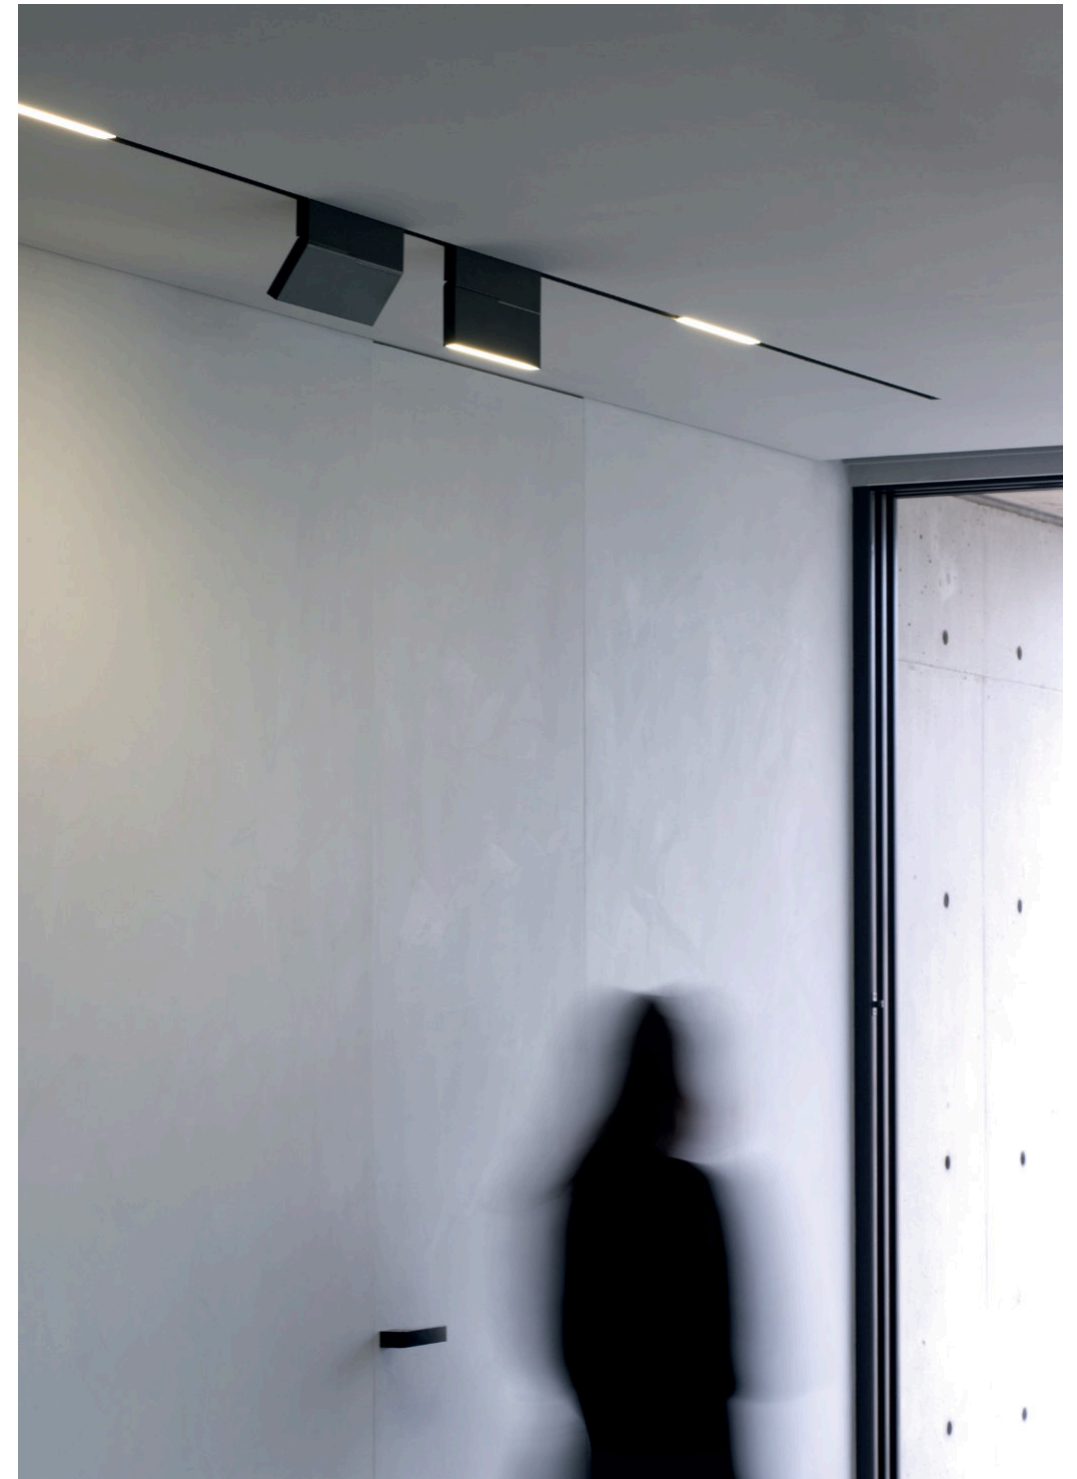

°online / Grey Office, Greece- architects eDje - photograph by Vangelis Paterakis





°knick small monopoint - brass alu brushed



°knick - brass alu brushed







°knick & °out, monopoint / B-house - architect Pitsou Kedem (Ran Broides) - photography by Amit Geron



°knick & °knick monopoint / GR-apartment - architect Pitsou Kedem (Ran Broides) - photography by Amit Geron



*tubu 40 & *in / Interior Design & Realization by @craft_and_concept - Photography by @ivanavdeenko_photography




*tubu 40 monopoint / Interior Design & Realization by @craft_and_concept - Photography by @ivanavdeenko_photography





°in / villa Beverly Hills - architects: Domaen - photograph by Paul Vu

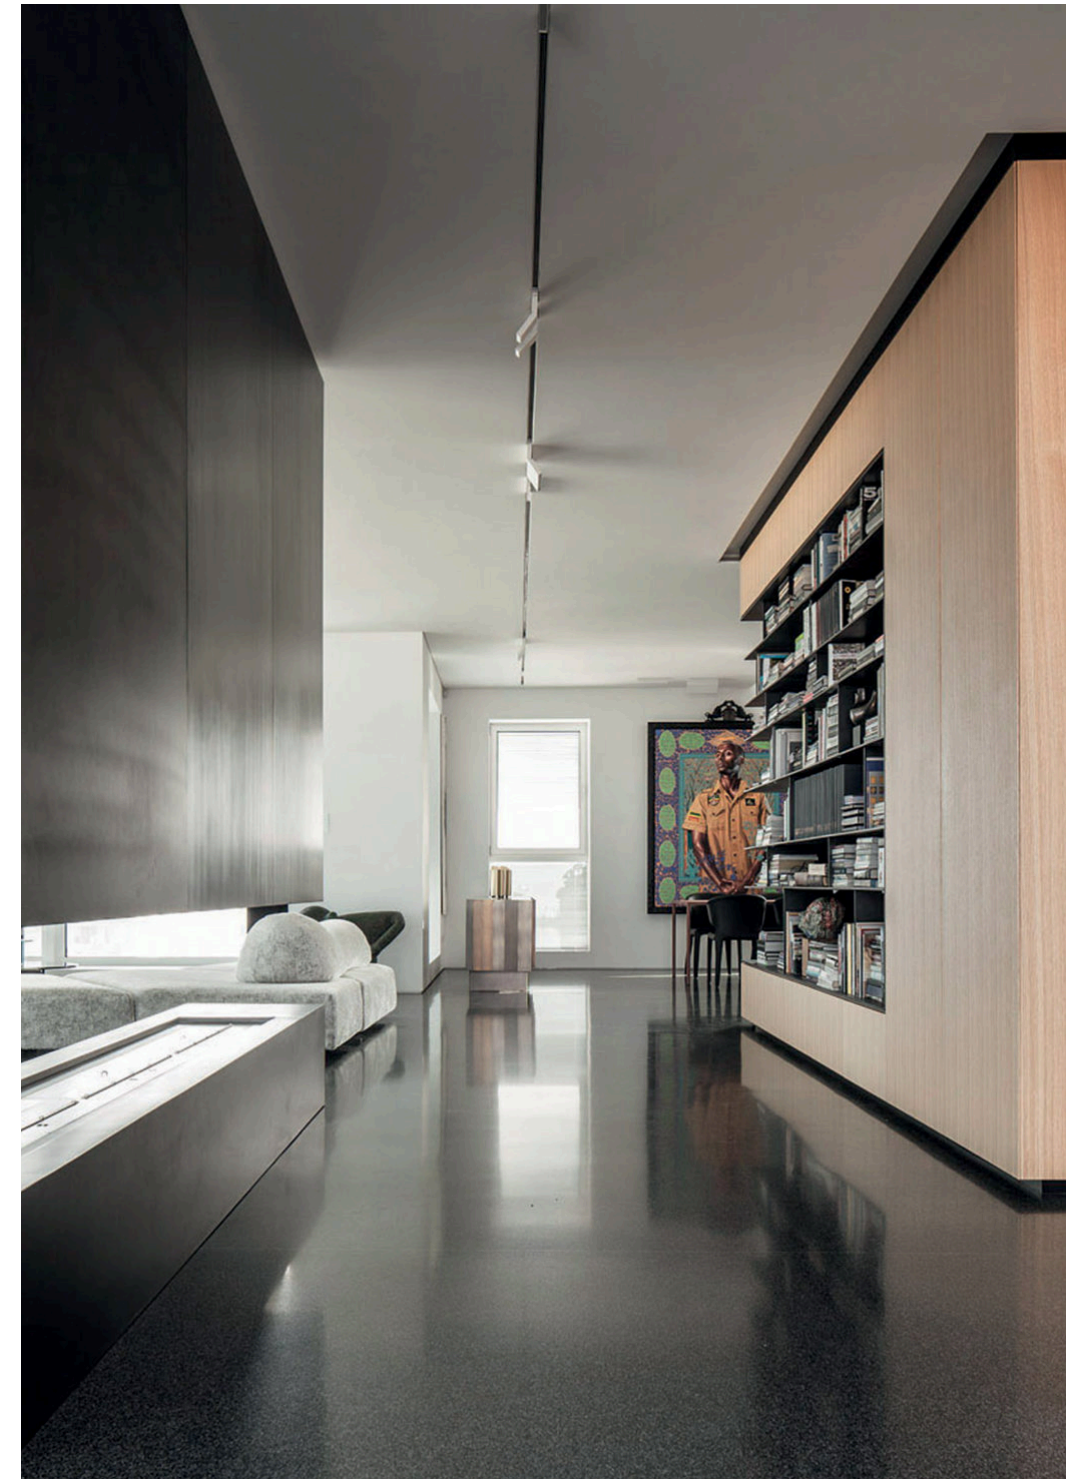

°turn / apartment, Israel - architect Pitsuo Kedem - ST-OR - lighting design Orly Avron - photograph by Amit Geron





°online / Villa V, Belgium - architect Francisca Hautekeete - photograph by Annick Vernimmen



°turn / Villa, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)






°knick °out °in / Glass Villa, Israel, design by Moos & Co, NY



°in / Glass Villa, Israel, design by Moos & Co, NY

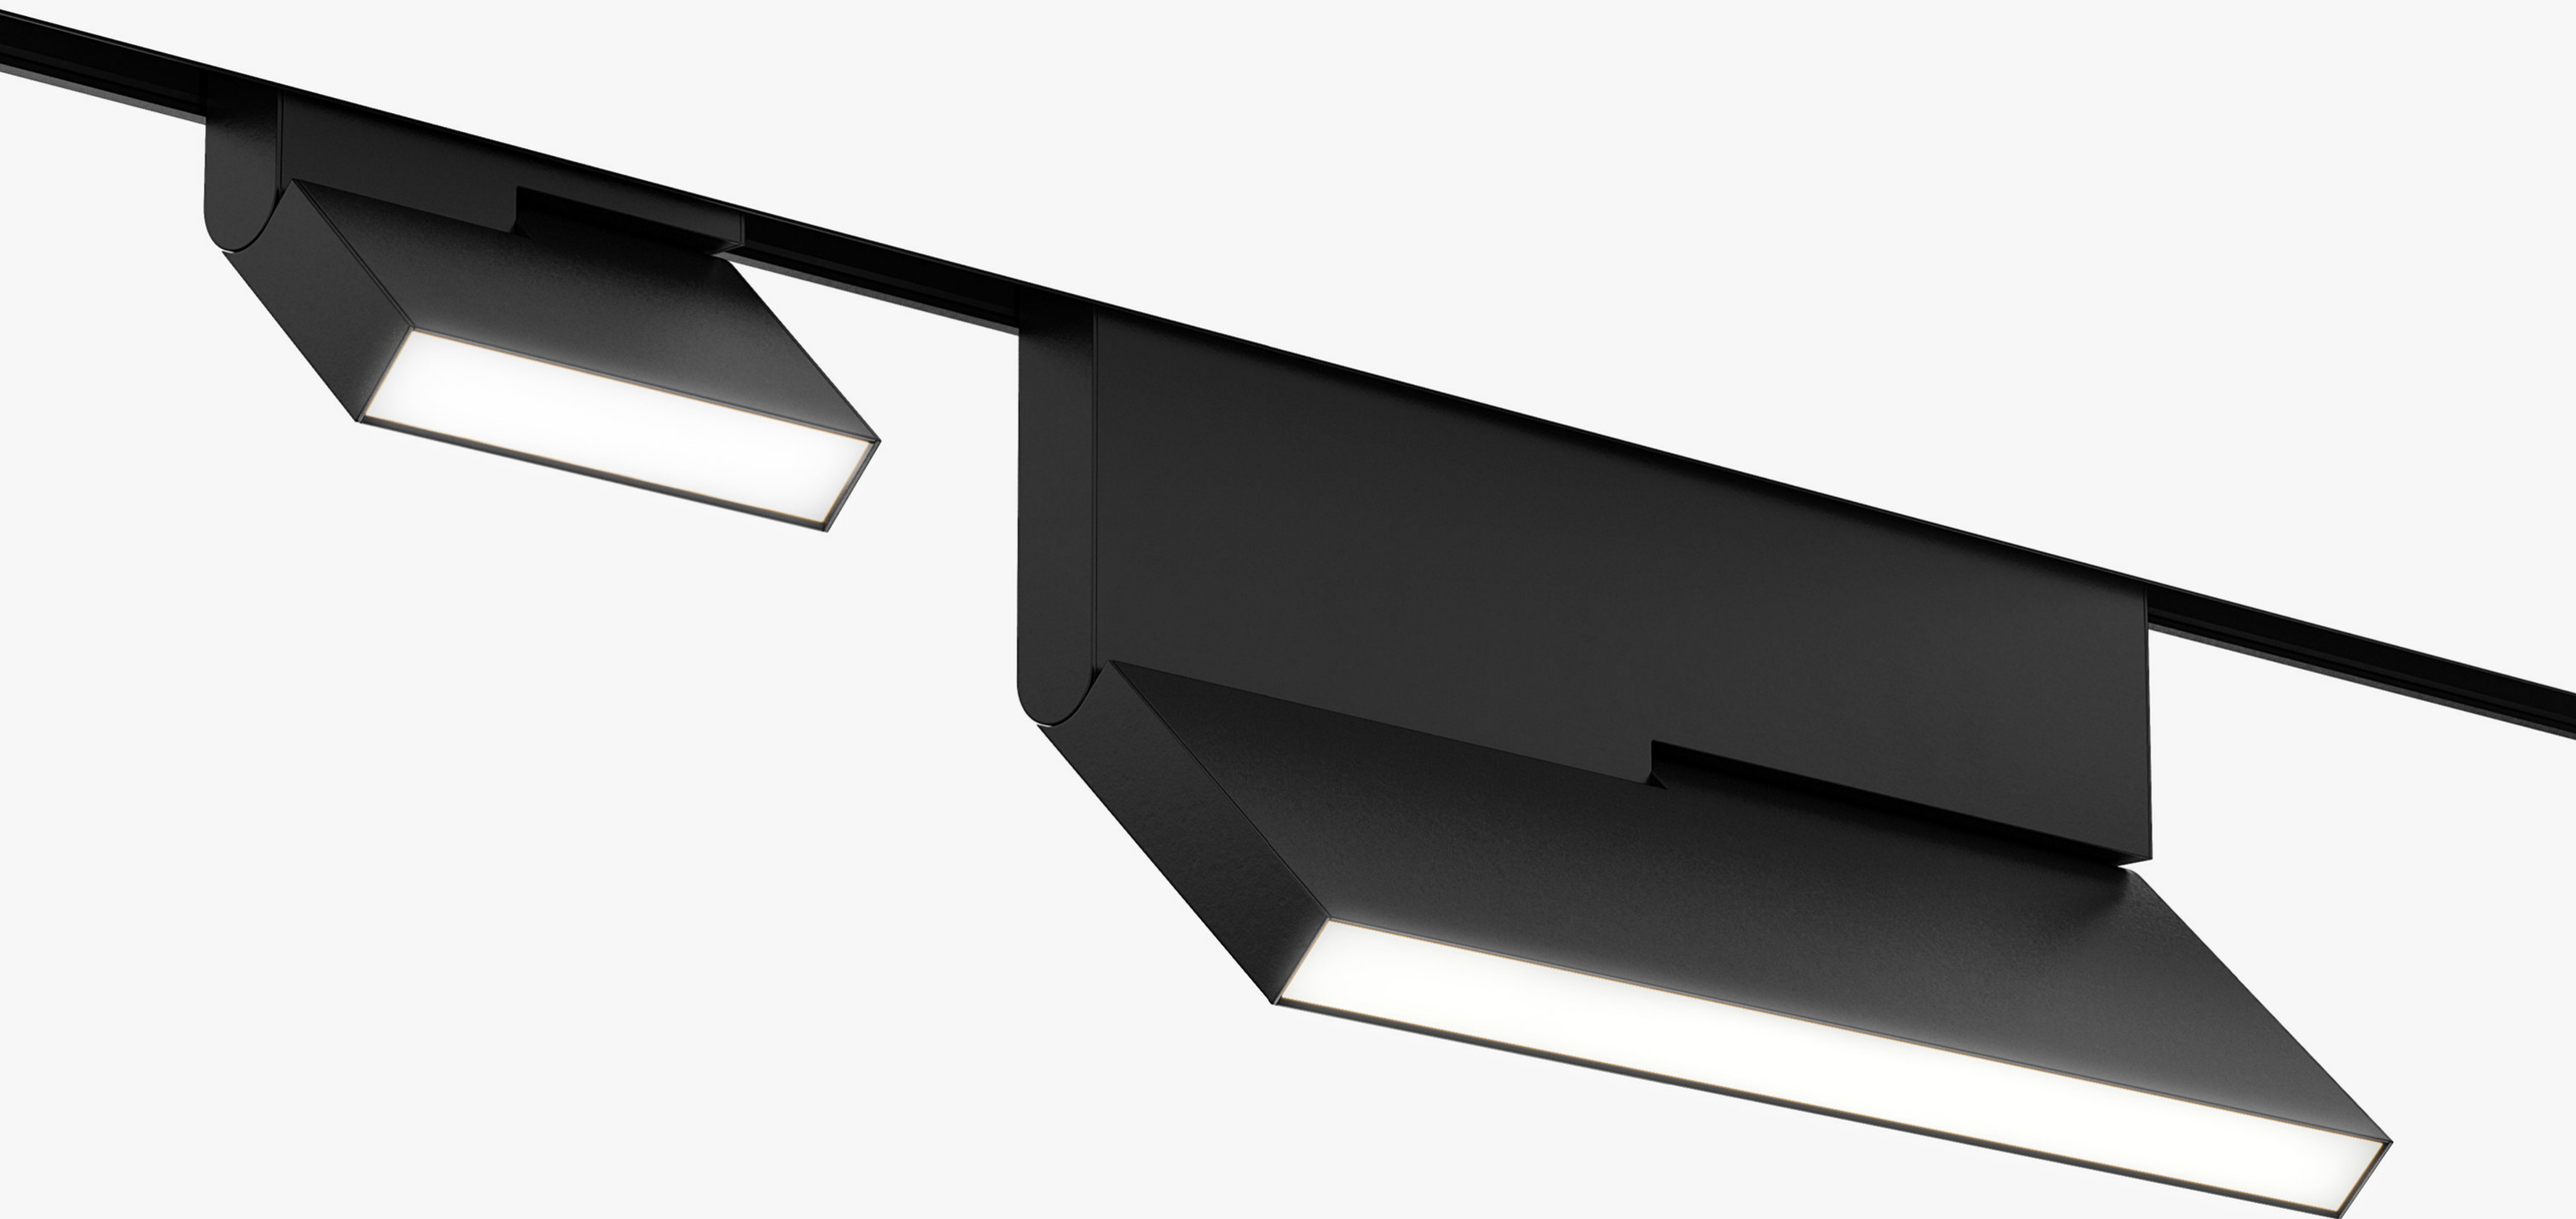



°knick / Penthouse, Ukraine - architect NOTT Design Studio (Sergey Gotvyansky, Mikhail Temnikov)



°out monpoint with plasterkit / Beach house Knokke - architect Glenn Reynaert - photograph by Hendrik Biegs



°in monopoint with plasterkit



°on line

°knick monopoint with plasterkit



*turn / galerie Kamel Mennour, Paris - architect Pierre Yovanovitch - lighting design Dominique Liners (ETOILES)
 photograph by Jean-François Jaussaud - Luxproductions



*in & *turn / Gert Robijns - Reset Home, centre for contemporary art




° knick



°dot monopoint with plasterkit



°knick / Industrial loft, Russia - architect Denis Krasikov, Cartelle Design

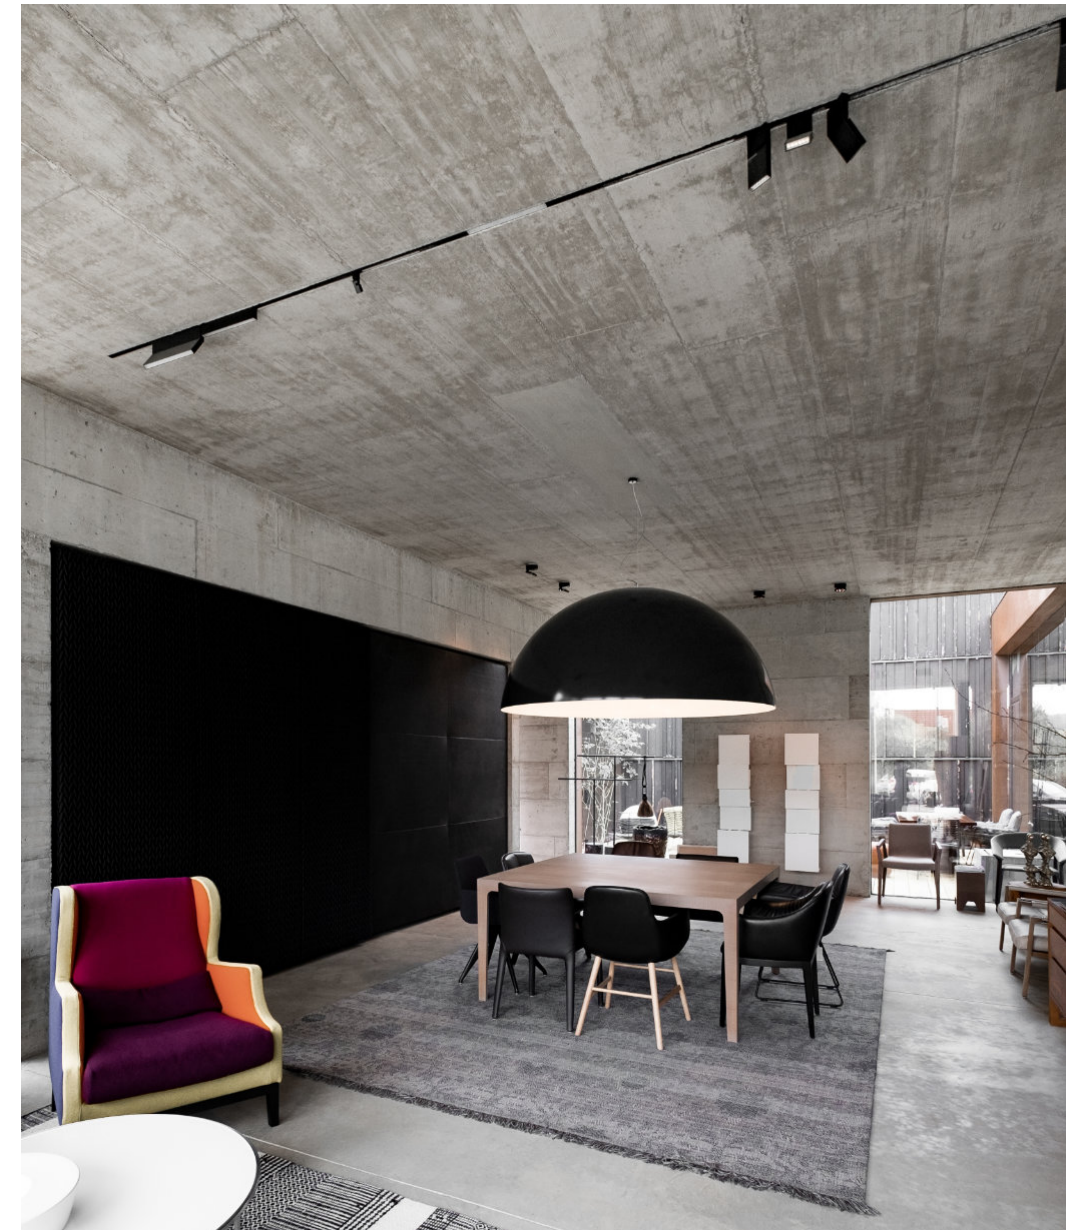

Möbelbau Breithenthaler showroom - Austria



°out / Church Genk, Belgium - architect PCP Architects - photograph by Philippe van Gelooven




°online suspended track / Design Museum Gent, Belgium - photograph by Beeldpunt

line.s

267


material	aluminum
voltage	48Vdc
circuits	1 circuit: 1x15A + databus 2 circuits: 2 x 15A
dimming	DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa

IP20    ENEC

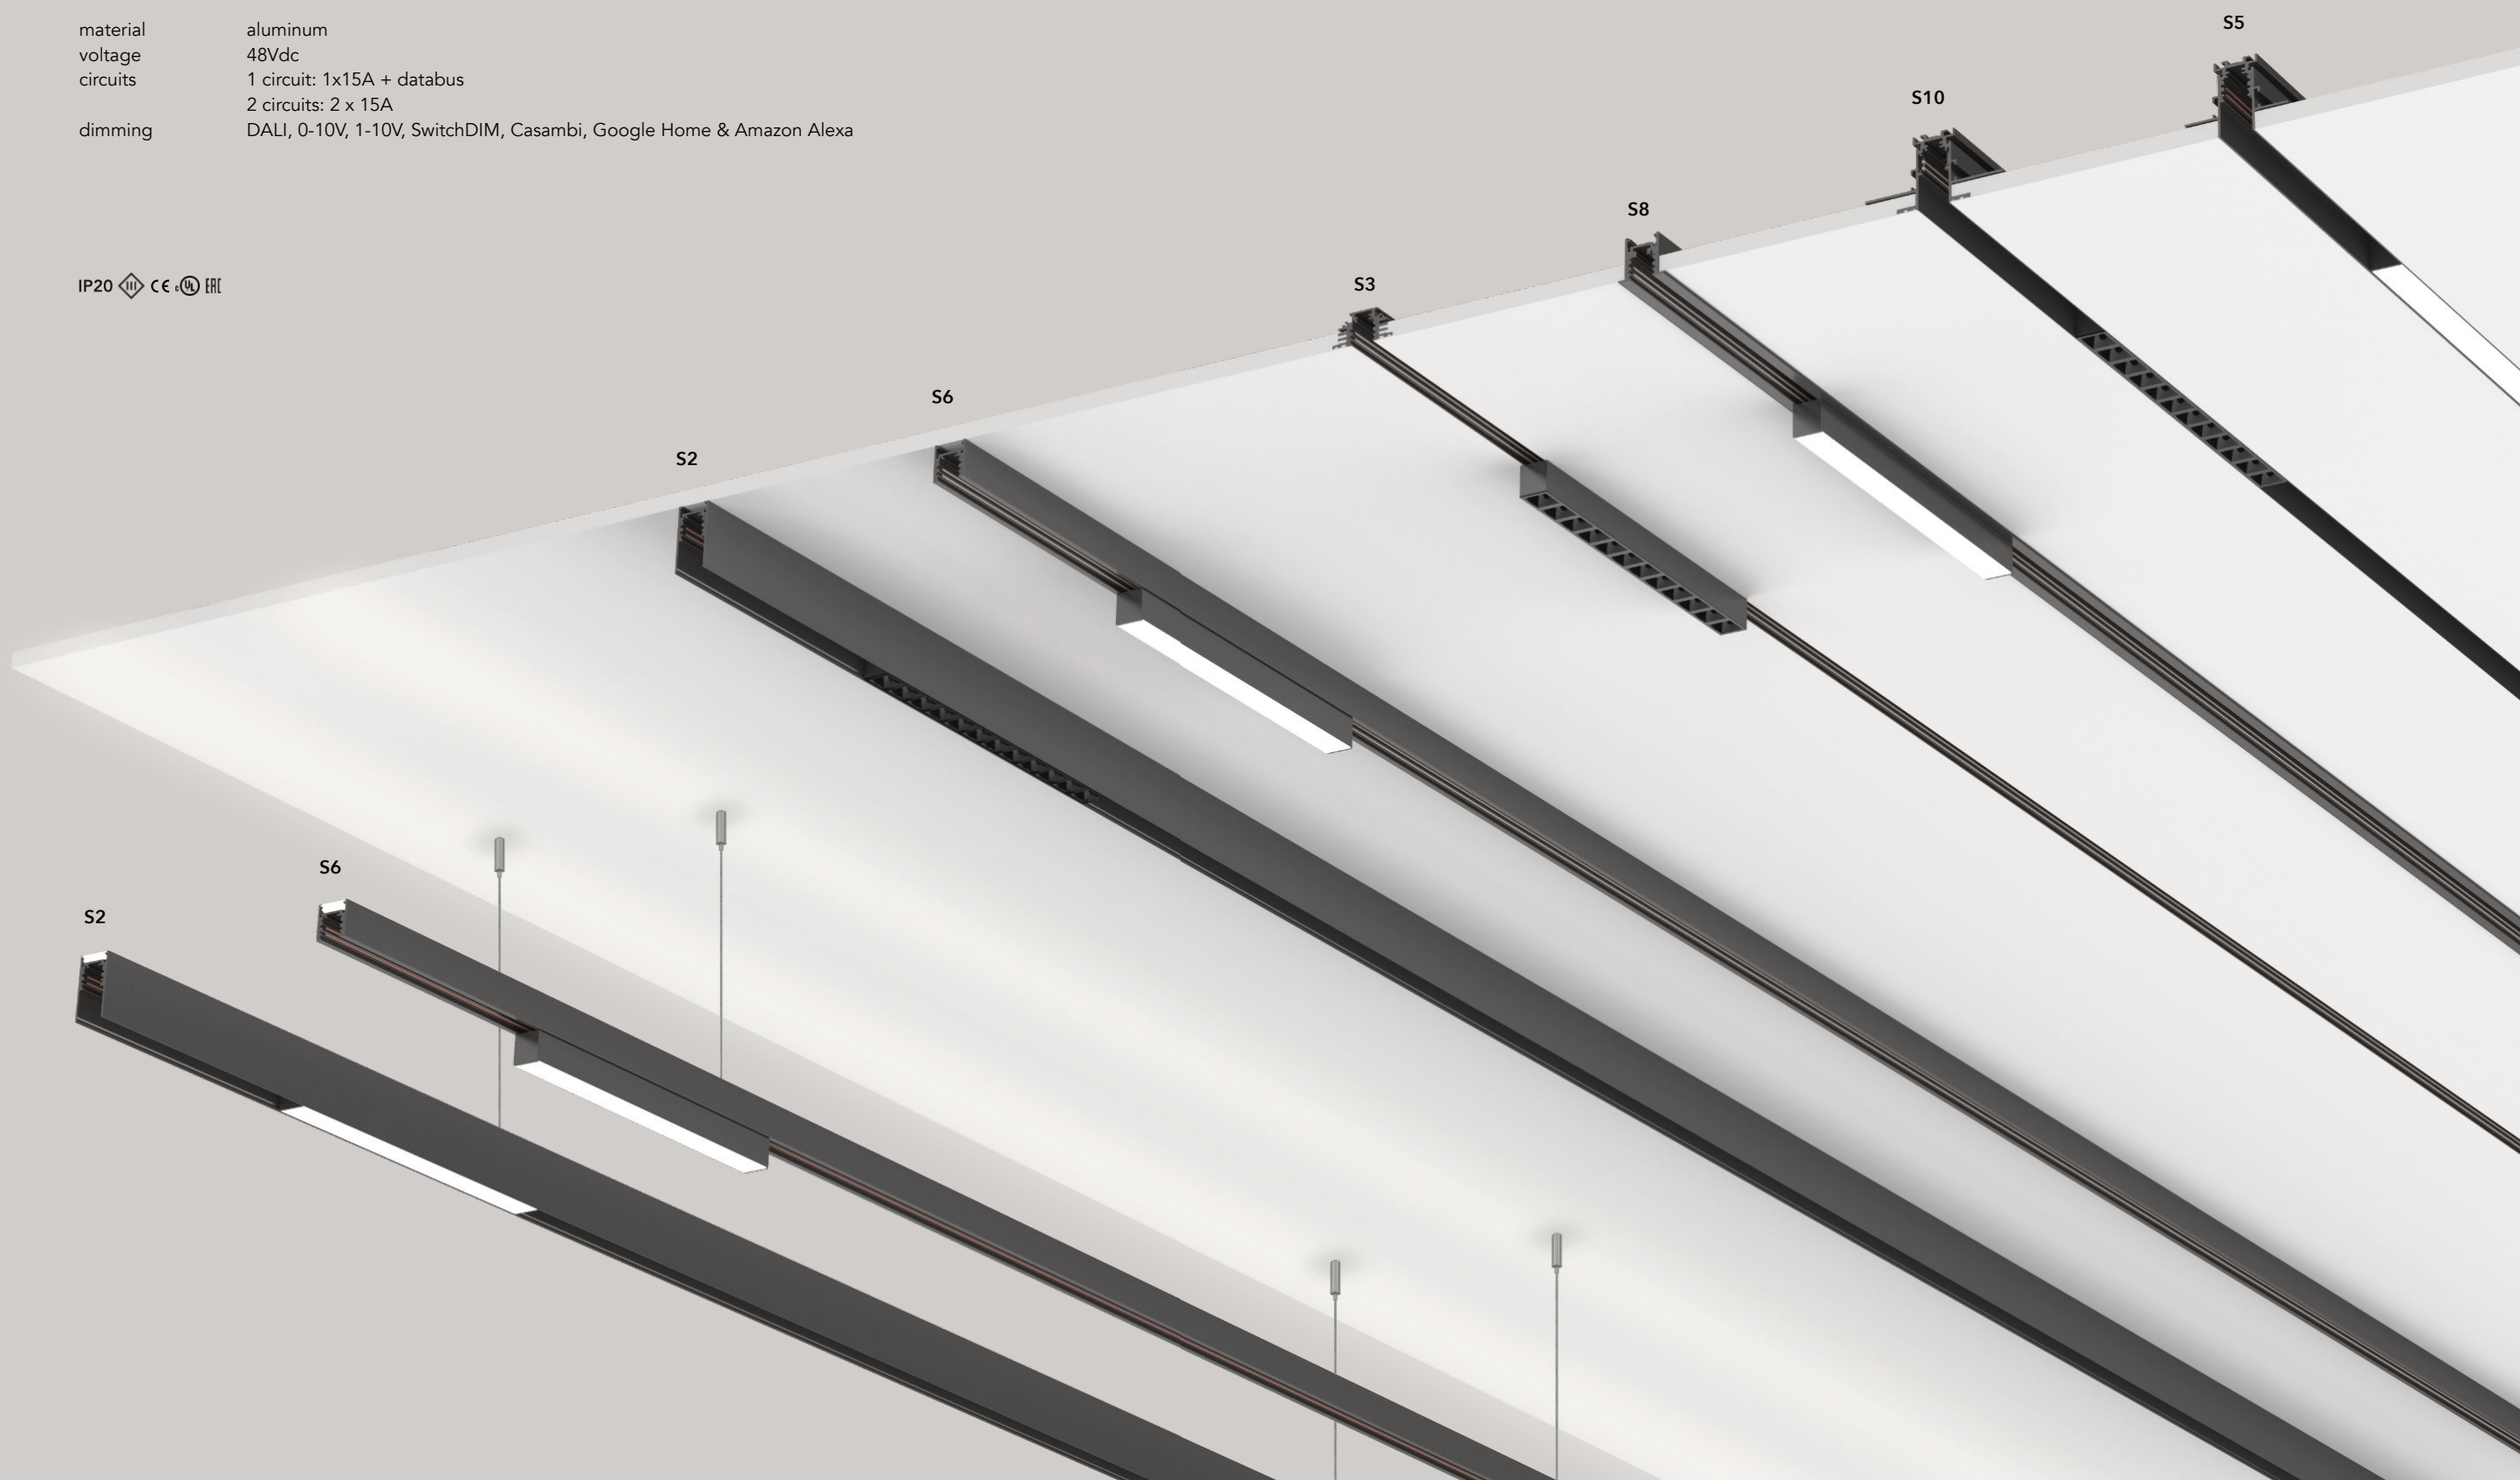


line.s


Surface mount

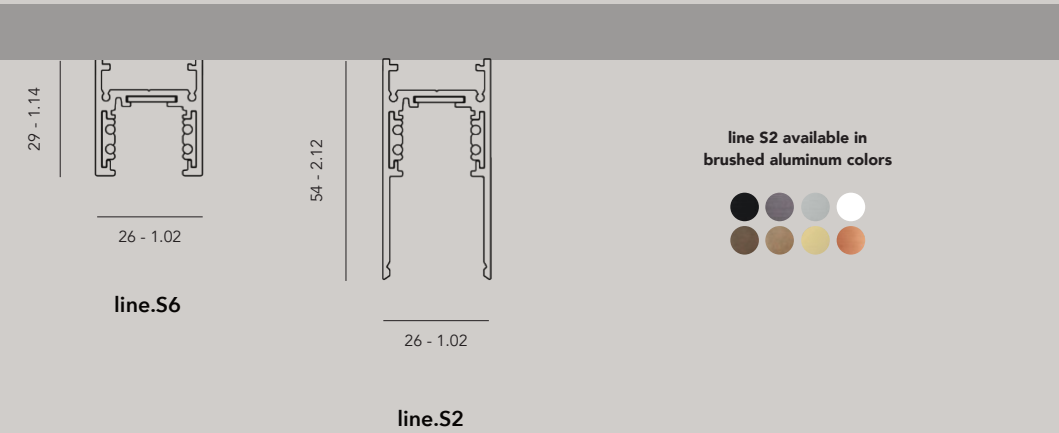

Pendant

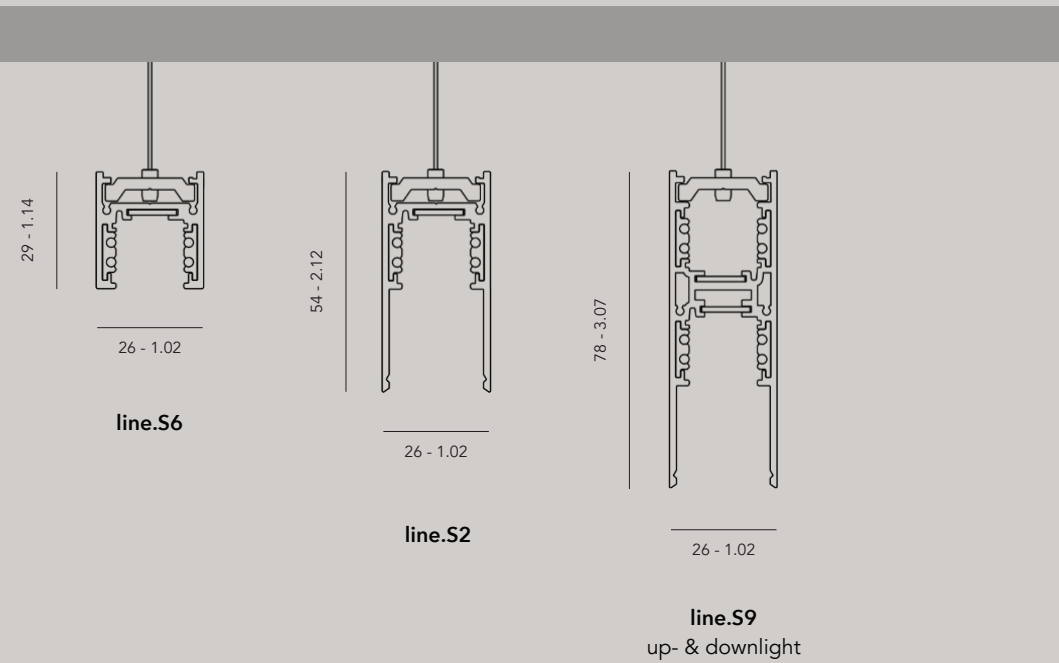


Recessed

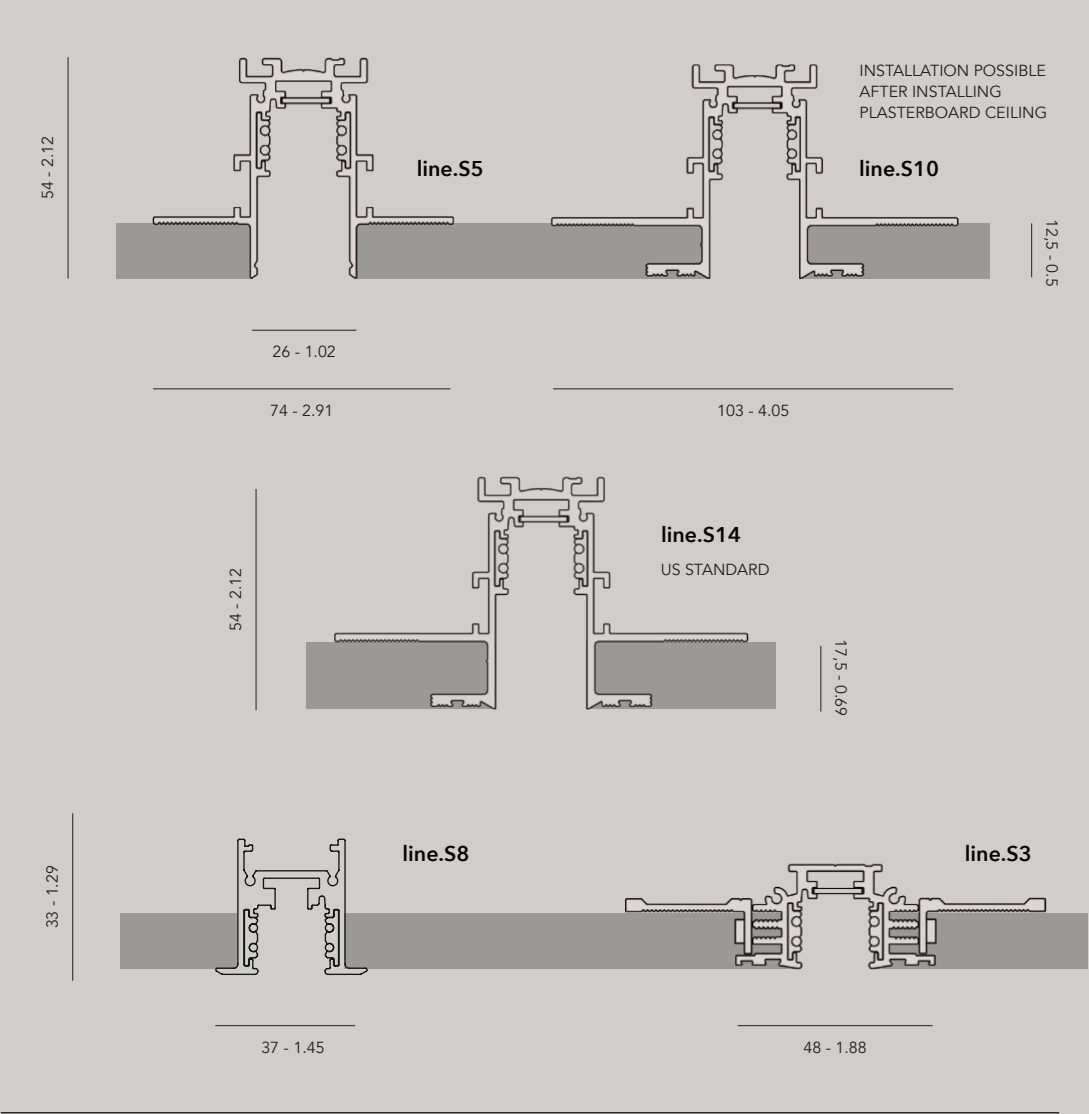


Order Code	AA	Finish
10002.AA00.BBBB line.S2	01	black
10003.AA00.BBBB line.S3	02	white
10005.AA00.BBBB line.S5	22	aluminum brushed (only S2)
10006.AA00.BBBB line.S6	23	brass alu brushed (only S2)
10008.AA00.BBBB line.S8	25	bronze alu brushed (only S2)
10009.AA00.BBBB line.S9 pendant	26	dark bronze alu brushed (only S2)
10010.AA00.BBBB line.S10		
10014.AA00.BBBB line.S14		
10052.AA00.BBBB line.S2 pendant		
10056.AA00.BBBB line.S6 pendant		
10062.AA00.BBBB line.S2 pendant uplight		
	BBBB	Length
	0300	300 mm
	0500	500 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm
	xxxx	xxxx mm (custom length)

track set-up & accessories

LINE.S10

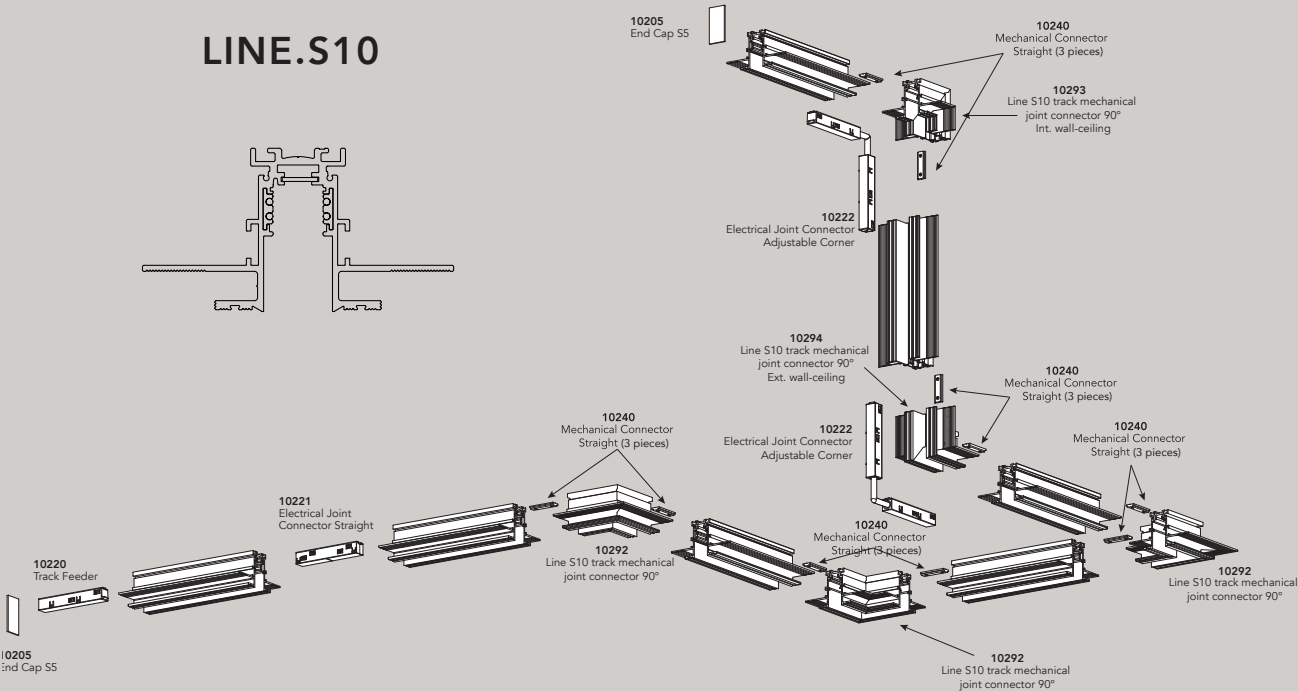


LINE.S5

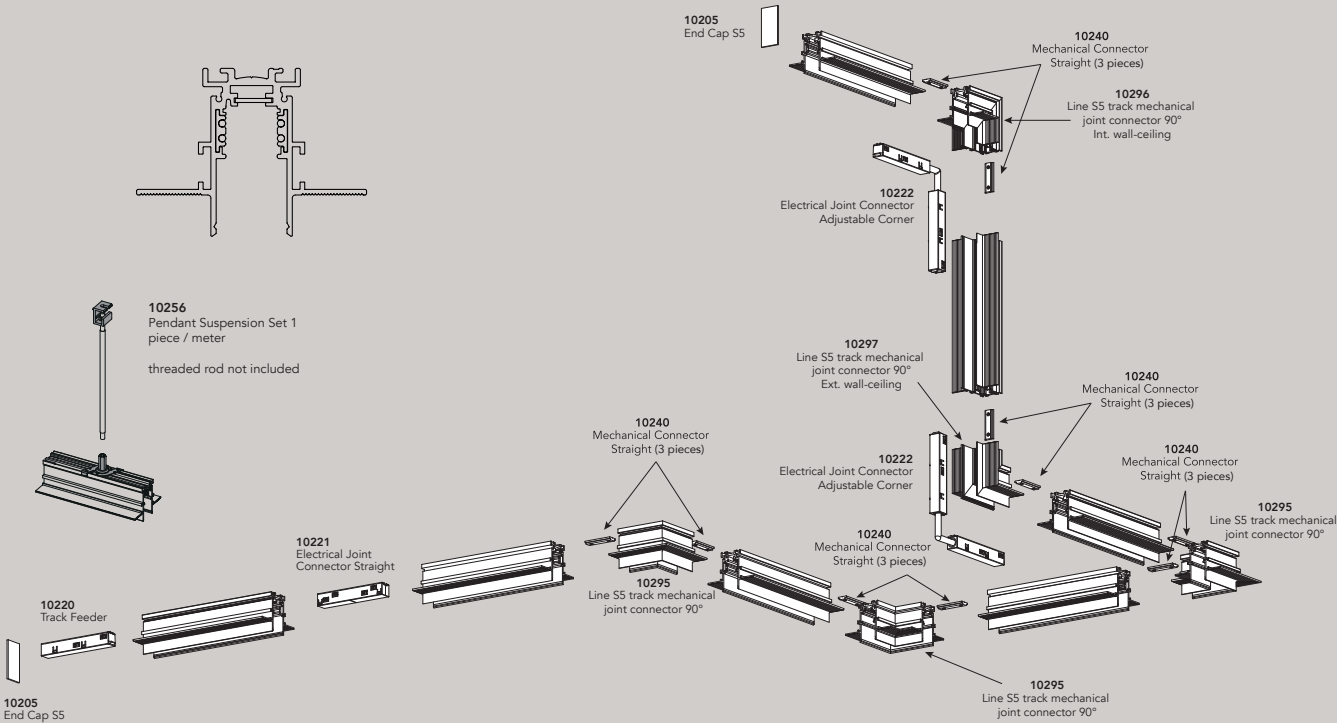


LINE.S14


US VERSION

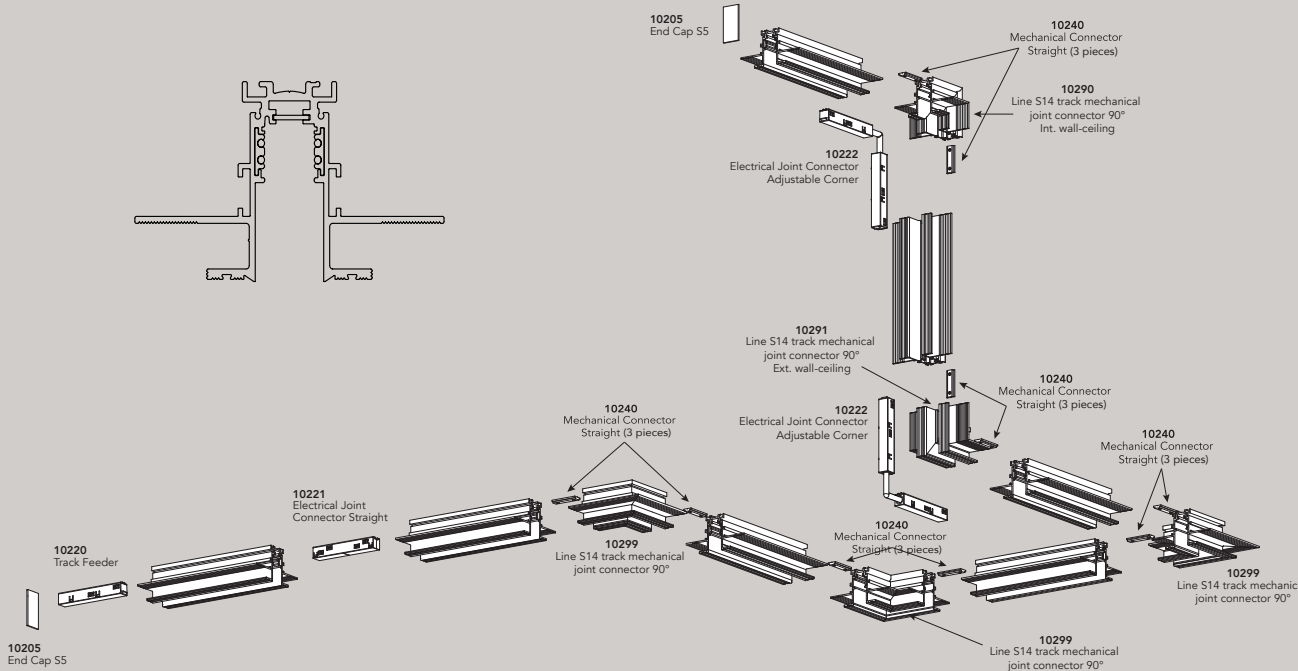

LINE.S2


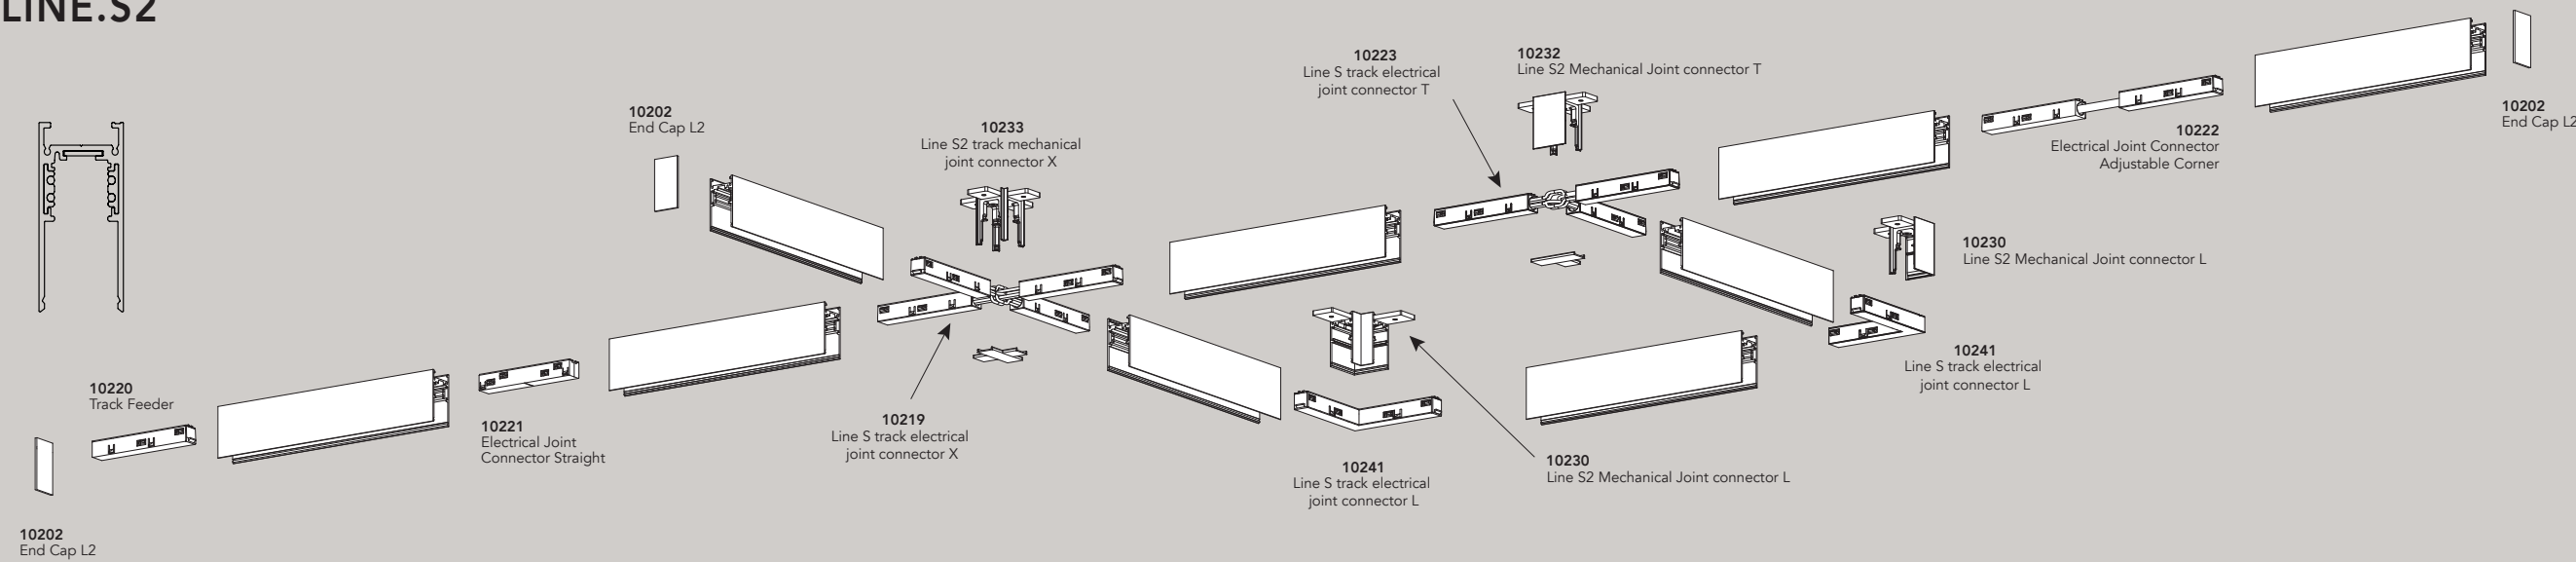


LINE.S6

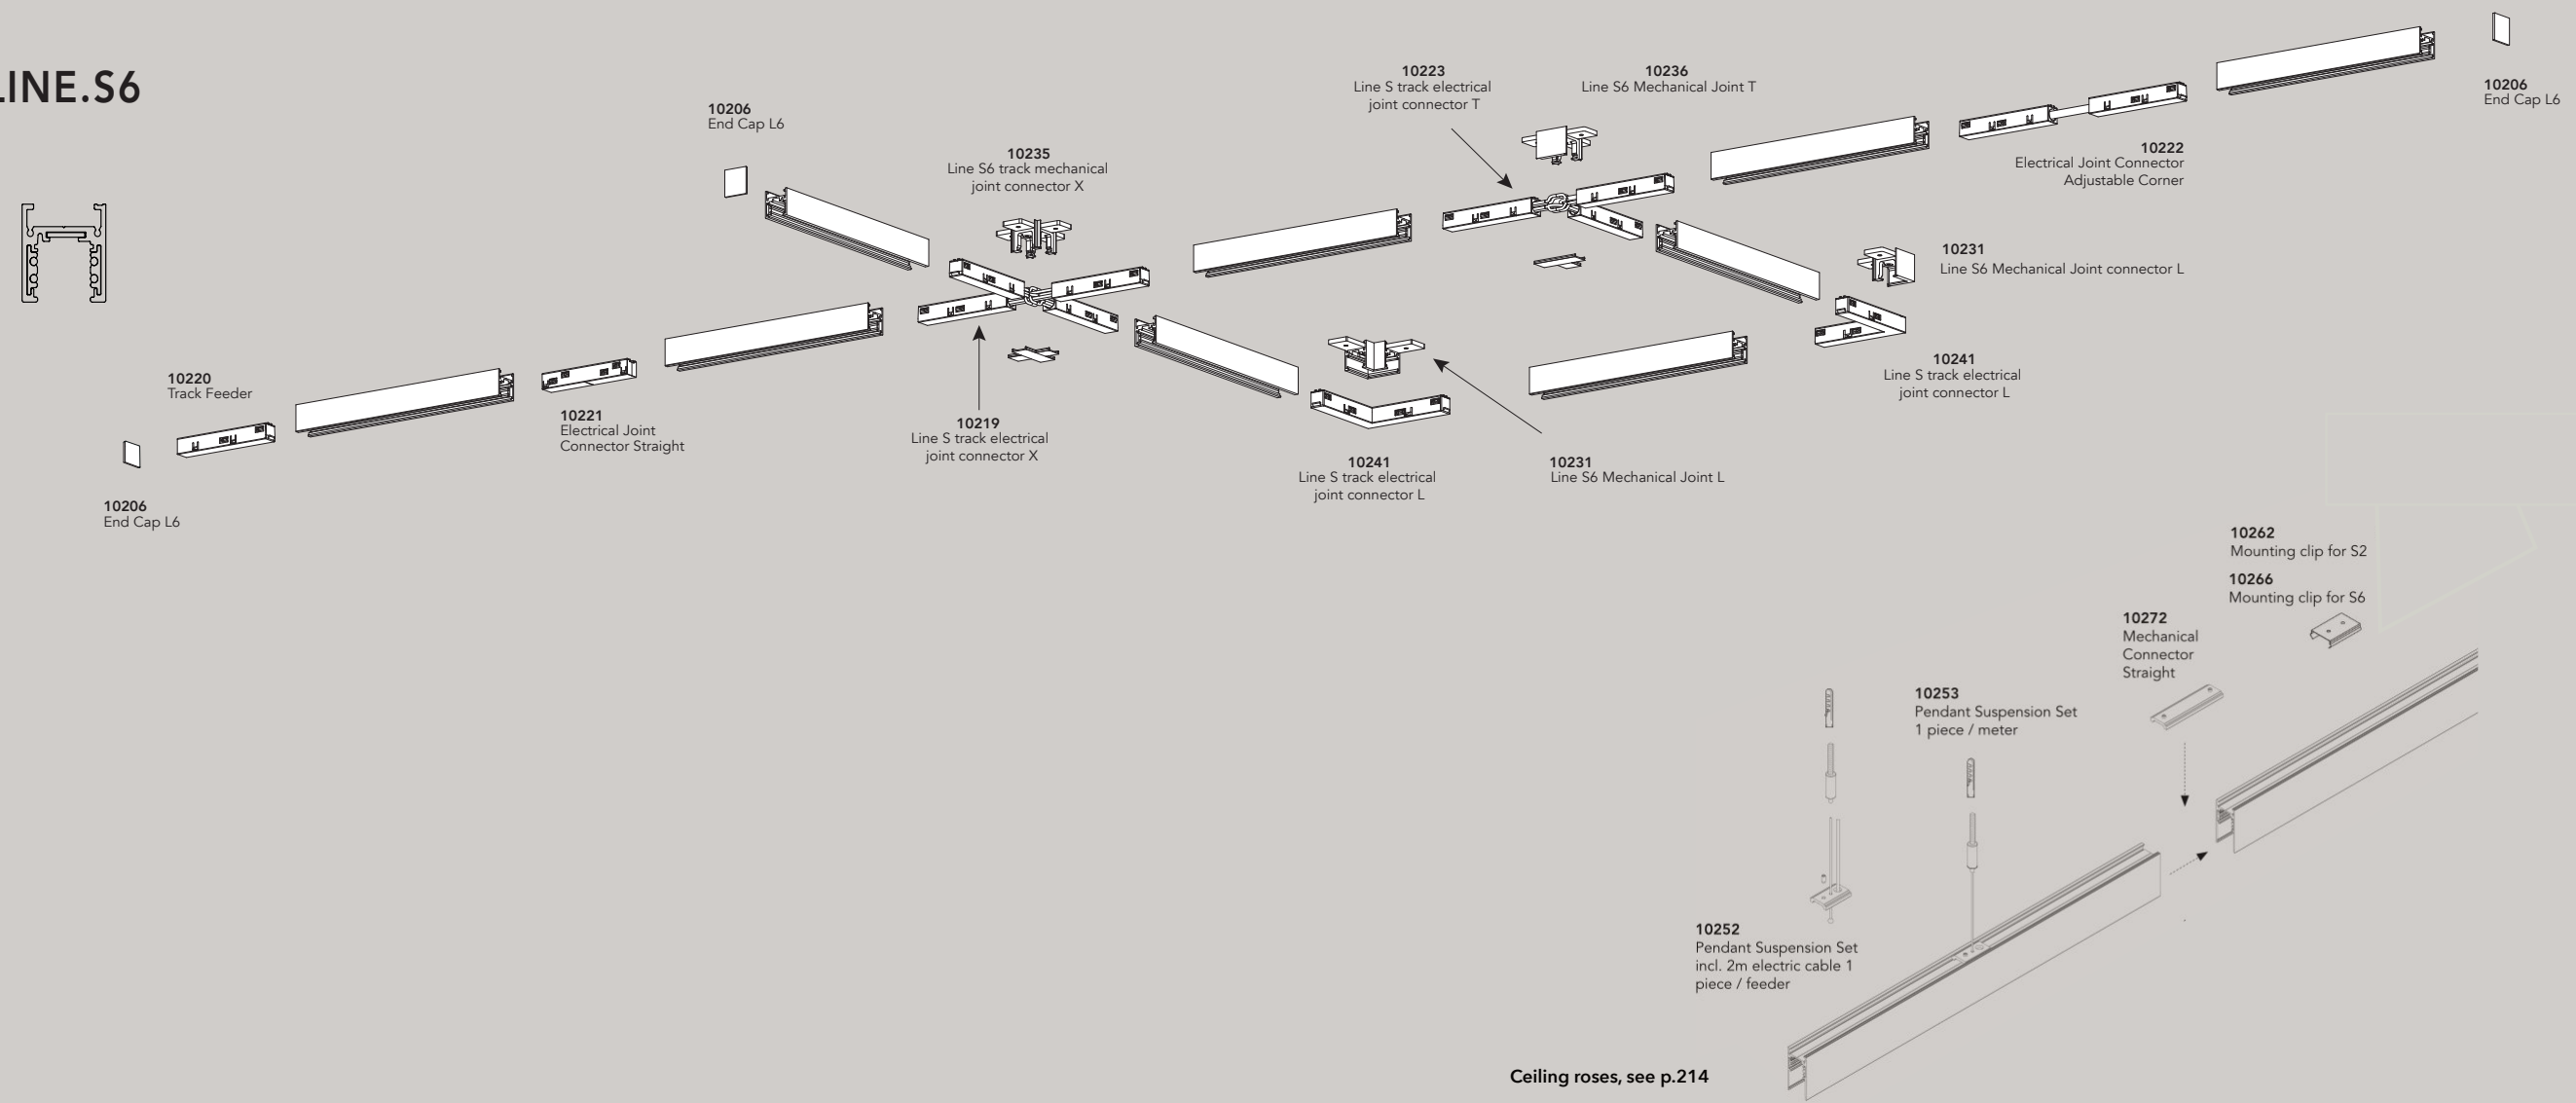


Ceiling roses, see p.214

LINE.S8

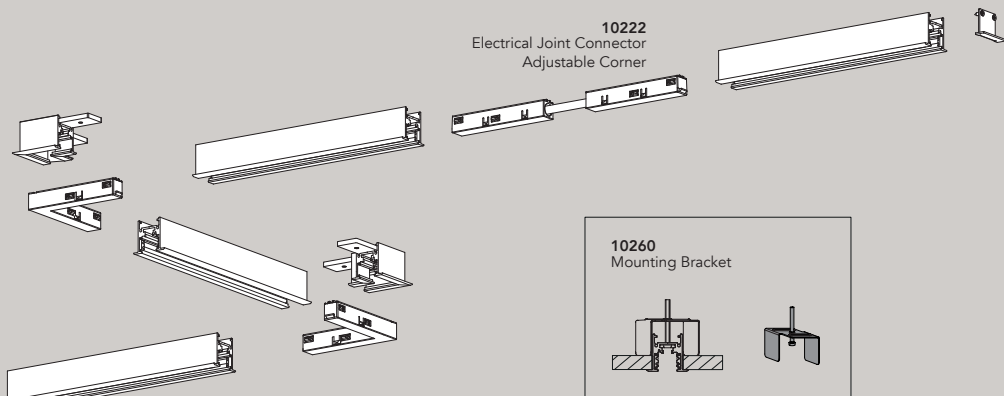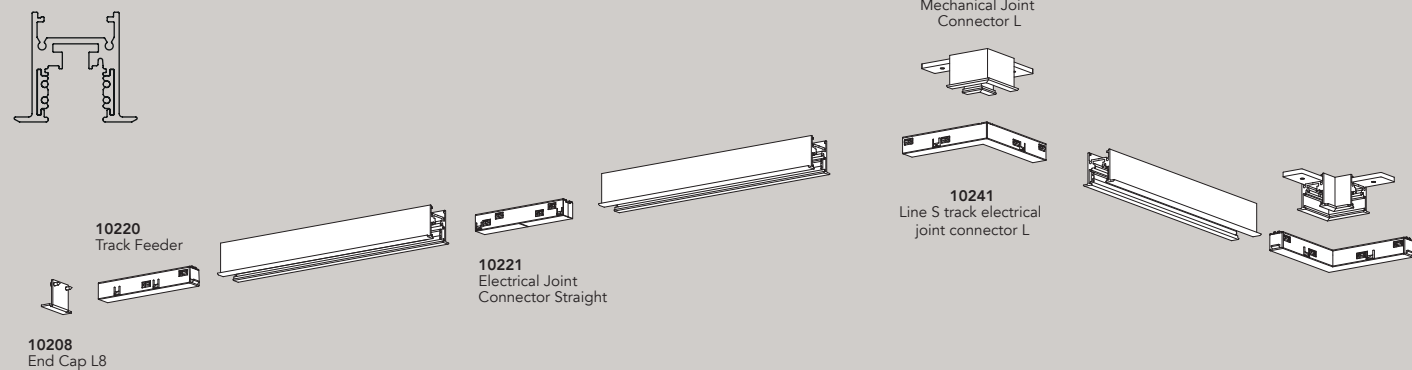


LINE.S3

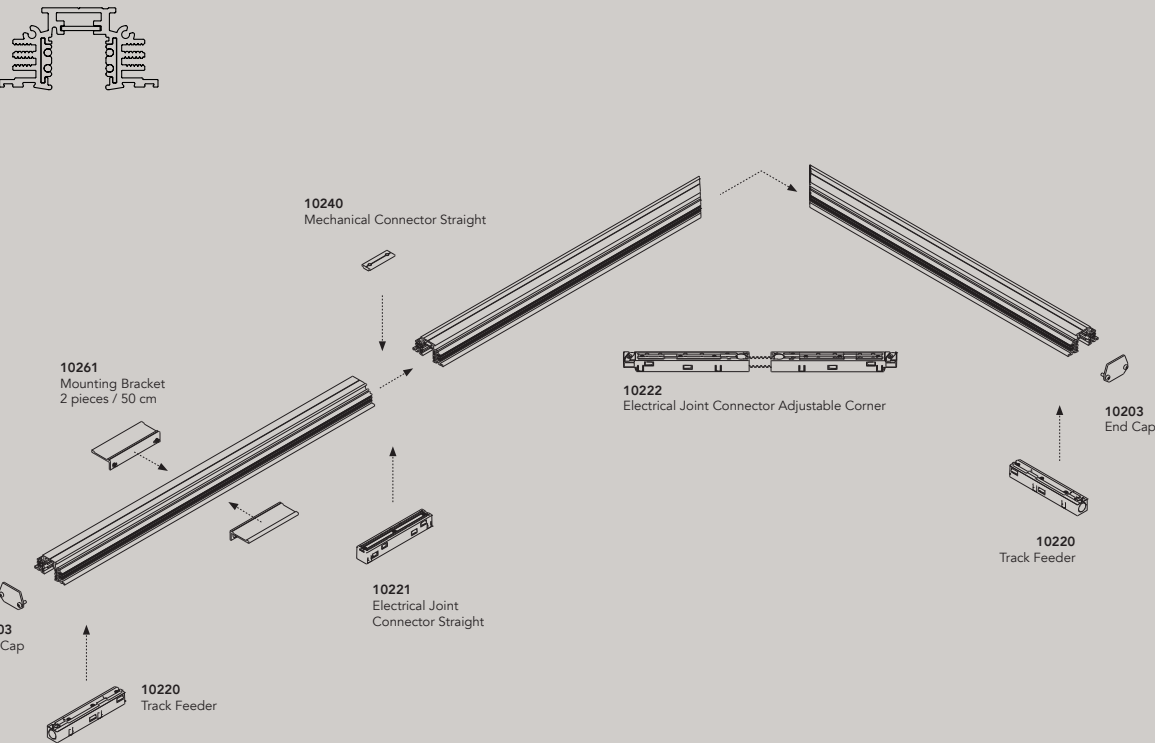

48V Power supplies & controls

Order Code

remote	
90101.0000	Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
90102.0000	Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
90103.0000	Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
90104.0000	Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified
90110.0000	Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
90111.0000	Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed
90001.0000	0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
90002.0000	Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
90003.0000	Dali opto insulator for galvanic isolation
on track	
90112.0100	Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE only for track Line S (all tracks) - black
90113.0100	Power supply, 48VDC, 250W - 220-240VAC/50-60Hz CE only for track Line S2, S5 & S10 - black
90112.0200	Power supply, 48VDC, 100W - 220-240VAC/50-60Hz CE only for track Line S (all tracks) - white
90113.0200	Power supply, 48VDC, 250W - 220-240VAC/50-60Hz CE only for track Line S2, S5 & S10 - white

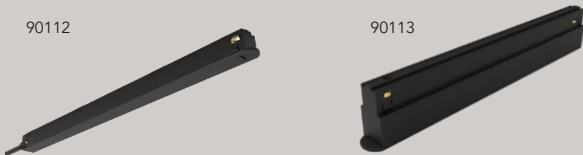



°knick

materials aluminum / PC
weight 1070gr / 2.35-lb
voltage 48 Vdc
wattage 8,2W - 16,8W (high output)
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    



°knick - frosted ice

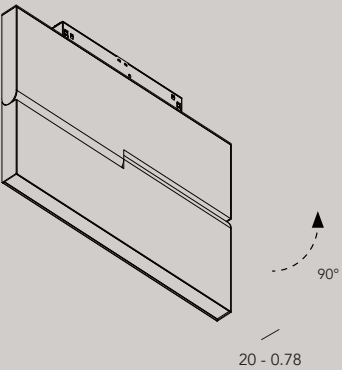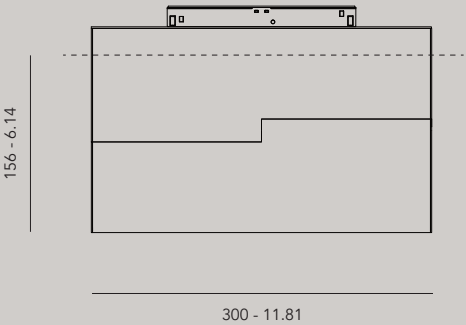

Order Code

10500.AA00.BBBB.CCC.DD knick
10501.AA00.BBBB.CCC.DD knick high output
10503.AA00.BBBB.CCC.DD knick monopoint
10504.AA00.BBBB.CCC.DD knick monopoint high output

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories



10101 line S plasterkit knick/out

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°knick medium

materials aluminum / PC
weight 718 gr / 1.58 lb
voltage 48 Vdc
wattage 19W
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    

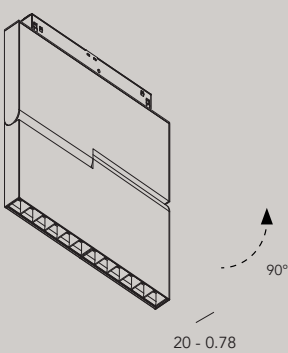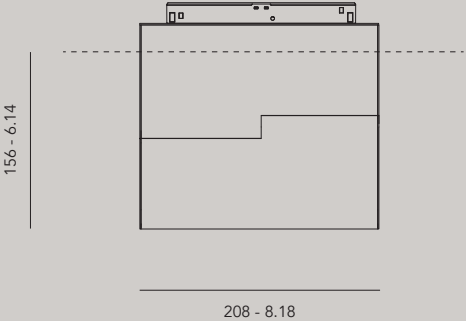

Order Code
10510.AA00.BBBB.CCC.DD knick medium
10513.AA00.BBBB.CCC.DD knick medium monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9527	cri >95, 2700K	
9530	cri >95, 3000K	
9540	cri >95, 4000K - on request	
CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
255	25° black glossy louvre	1800 lm
355	35° black glossy louvre	1800 lm
108	10° white glossy louvre	1800 lm
258	25° white glossy louvre	1800 lm
358	35° white glossy louvre	1800 lm
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	


Accessories
10113 line S plasterkit knick m & out m

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°knick small

materials	aluminum / PC
weight	260gr / 0.57lb
voltage	48 Vdc
wattage	9,6 W
ugr	louvre <19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

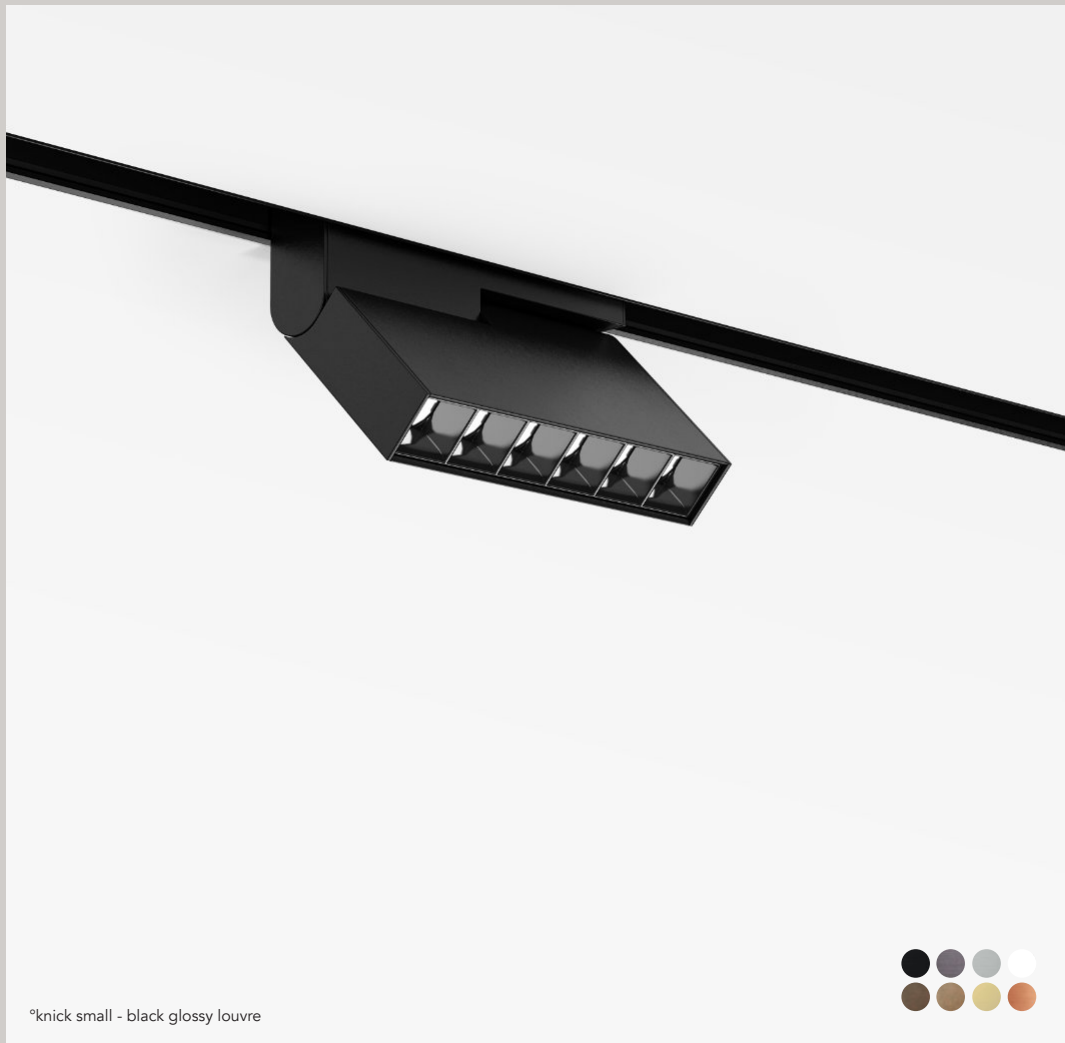

°knick small - black glossy louvre

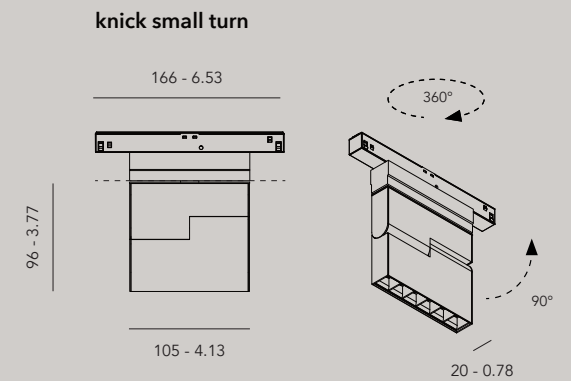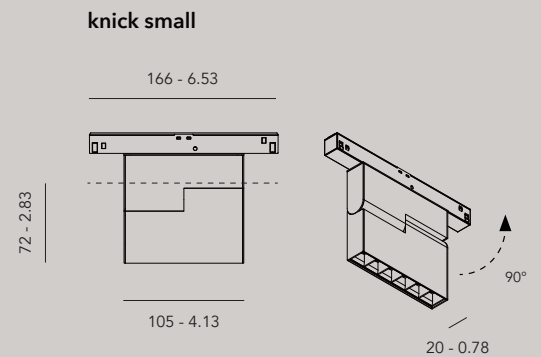

Order Code

10600.AA00.BBBB.CCC.DD knick small
10603.AA00.BBBB.CCC.DD knick small monopoint

10610.AA00.BBBB.CCC.DD knick small turn
10613.AA00.BBBB.CCC.DD knick small turn monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
001	frosted ice	500lm - 220cd
002	microprism	550lm - 330cd
105	10° black glossy louvre	895lm - 18340cd
255	25° black glossy louvre	895lm - 18340cd
355	35° black glossy louvre	895lm - 18340cd
108	10° white glossy louvre	895lm - 18340cd
258	25° white glossy louvre	895lm - 18340cd
358	35° white glossy louvre	895lm - 18340cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories

10102 line S plasterkit knick small (turn)

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.




°knick small - dark bronze brushed - black glossy louvre



°knick small - brass brushed - black glossy louvre



°knick small - bronze brushed - black glossy louvre

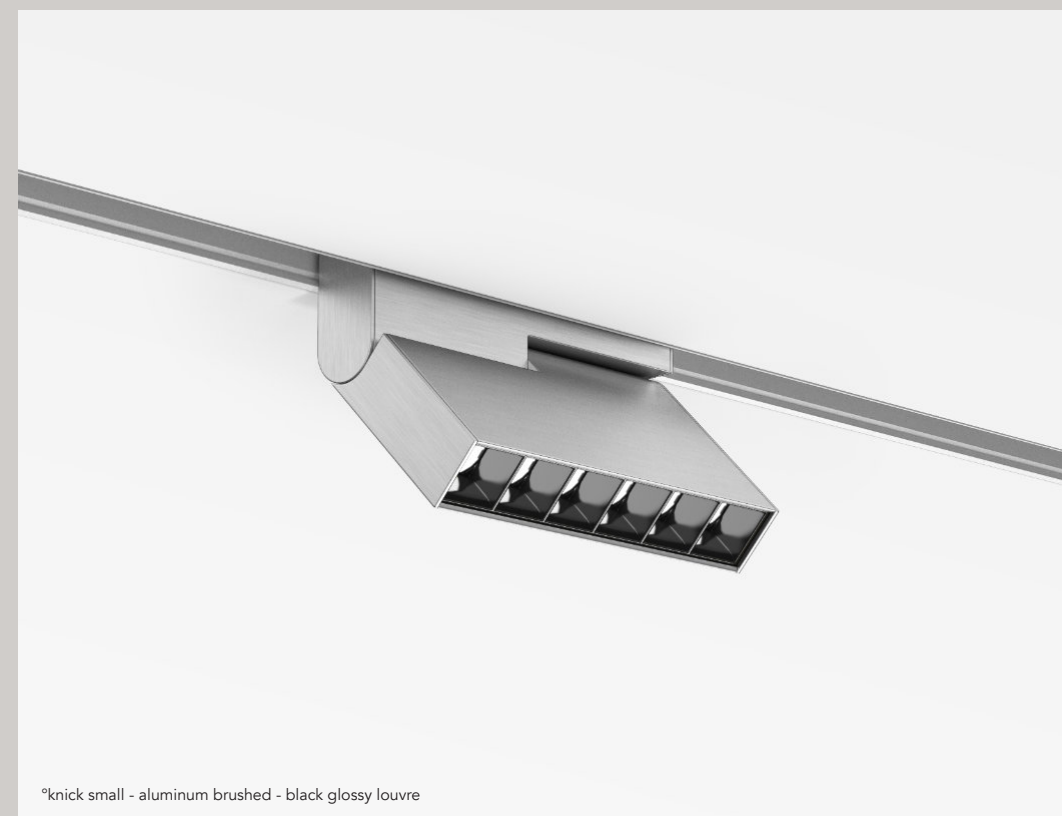

°knick small - aluminum brushed - black glossy louvre

materials

weight

voltage

dimming


aluminum / PC

175gr - 0,38lb for 286 mm

48 Vdc


DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    

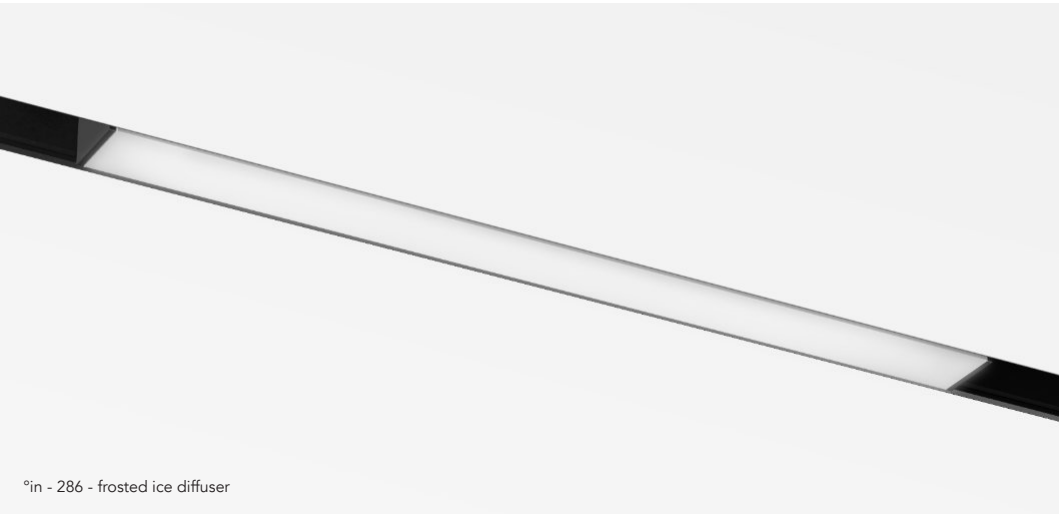

Length
mm – inch

1144 - 45.03		20 - 0.78
858 - 33.77		
572 - 22.51		
286 - 11.25		
143 - 5.62		

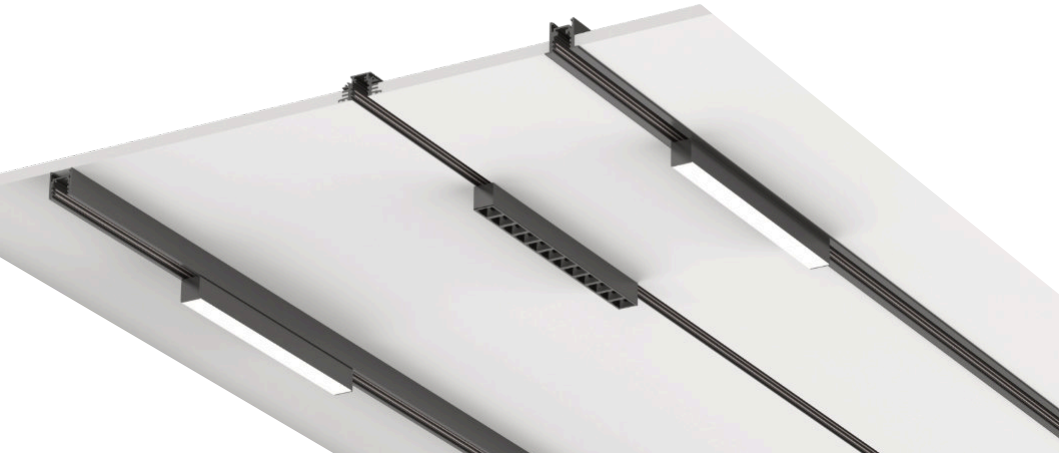

Order Code

- 10701.AA00.BBBB.CCC.DD in 143 mm
10702.AA00.BBBB.CCC.DD in 143 mm high output
10703.AA00.BBBB.CCC.DD in 143 mm monopoint
10704.AA00.BBBB.CCC.DD in 143 mm monopoint high output

10711.AA00.BBBB.CCC.DD in 286 mm
10712.AA00.BBBB.CCC.DD in 286 mm high output
10713.AA00.BBBB.CCC.DD in 286 mm monopoint
10714.AA00.BBBB.CCC.DD in 286 mm monopoint high output

- 10721.AA00.BBBB.CCC.DD in 572 mm
10723.AA00.BBBB.CCC.DD in 572 mm monopoint

- 10731.AA00.BBBB.CCC.DD in 858 mm

- 10741.AA00.BBBB.CCC.DD in 1144 mm

Other lenghts on request (a multiple of 286 mm)

AA	Finish
01	black
02	white
BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request
90TW	cri >90, tunable white - on request only for frosted ice & microprism

CCC	Optic
001	frosted ice
002	microprism
205	20° black glossy louvre
355	35° black glossy louvre
605	60° black glossy louvre
206	20° black matt louvre
356	35° black matt louvre
606	60° black matt louvre
207	20° white matt louvre
357	35° white matt louvre
607	60° white matt louvre

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories


- 10108 line S plasterkit in 143 mm
10109 line S plasterkit in 286 mm
10110 line S plasterkit in 572 mm

length (mm)	beam °	color K	CRI ra	candela cd	lumen lm	power W	efficacy lm/W	glare UGR
frosted ice								
143	106	3000	95	125	342,5	4,1	84	<30
286	106	3000	95	250	685	8,2	84	<30
572	106	3000	95	500	1370	16,4	84	<30
858	106	3000	95	750	2055	24,6	84	<30
1144	106	3000	95	1000	2740	32,8	84	<30
microprism								
143	90	3000	95	200	425	4,1	104	<30
286	90	3000	95	400	850	8,2	104	<30
572	90	3000	95	800	1700	16,4	104	<30
858	90	3000	95	1200	2550	24,6	104	<30
1144	90	3000	95	1600	3400	32,8	104	<30
frosted ice high output								
143	106	3000	95	248	700	8,4	83	<31
286	106	3000	95	496	1400	16,8	83	<31
microprism high output								
143	90	3000	95	420	910	8,4	108	<31
286	90	3000	95	840	1820	16,8	108	<31
spot								
143	20	3000	>95	2210	390	6,2	63	<11
286	20	3000	>95	4350	850	13	65	<11
572	20	3000	>95	8700	1700	26	65	<11
858	20	3000	>95	13050	2550	39	65	<11
1144	20	3000	>95	17400	3400	52	65	<11
143	35	3000	>95	890	400	6,2	65	<15
286	35	3000	>95	2040	880	13	68	<15
572	35	3000	>95	4080	1760	26	68	<15
858	35	3000	>95	6120	2640	39	68	<15
1144	35	3000	>95	8160	3520	52	68	<15
143	60	3000	>95	510	340	6,2	55	<16
286	60	3000	>95	790	750	13	58	<16
572	60	3000	>95	1580	1500	26	58	<16
858	60	3000	>95	2370	2250	39	58	<16
1144	60	3000	>95	3160	3000	52	58	<16
spot high output								
143	20	3000	>95	3100	595	9	66	<11
286	20	3000	>95	6200	1190	18	66	<11
143	35	3000	>95	1420	550	9	61	<15
286	35	3000	>95	2840	1100	18	61	<15
143	60	3000	>95	735	550	9	61	<16
286	60	3000	>95	1470	1100	18	61	<16


°in - 143 - monopoint - frosted ice




°in - glossy black louvre spot

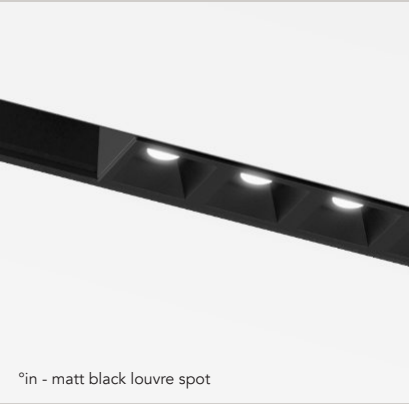

°in - matt black louvre spot

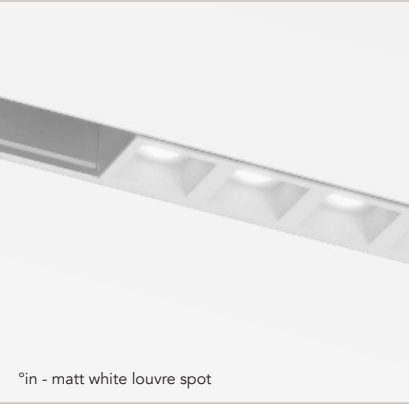

°in - matt white louvre spot

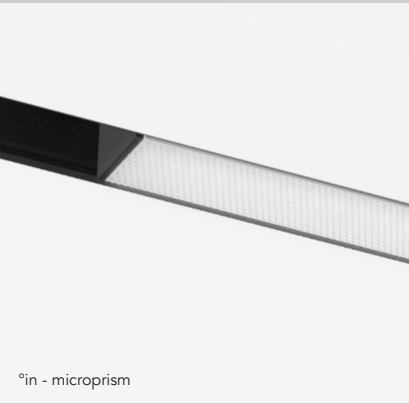

°in - microprism

oin for S3, S6 & S8

materials	aluminum / PC
weight	51gr - 300 mm / 85-128-170gr
voltage	48 Vdc
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi
ugr	<19

IP20    ENEC



Order Code

10715.AA00.BBBB.CCC.DD in 300 mm

AA	Finish
01	black
02	white
BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
CCC	Optic
350	35° (lens) - 290lm - 5W
600	60° (reflector) - 300lm - 5W
DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Order Code

10716.AA00.BBBB.DD in flat 694 mm - 566lm -9W
10717.AA00.BBBB.DD in flat 1194 mm - 1133lm - 18W
10718.AA00.BBBB.DD in flat 1694 mm -1700lm - 26W

AA	Finish
01	black
02	white
BBBB	Light
9027	cri >90, 2700K
9030	cri >90, 3000K
DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

°turn

materials

weight

voltage

wattage

dimming

aluminum / PC

400gr / 0.88lb

48 Vdc

9,6 W



DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20

CE

RoHS

ErC

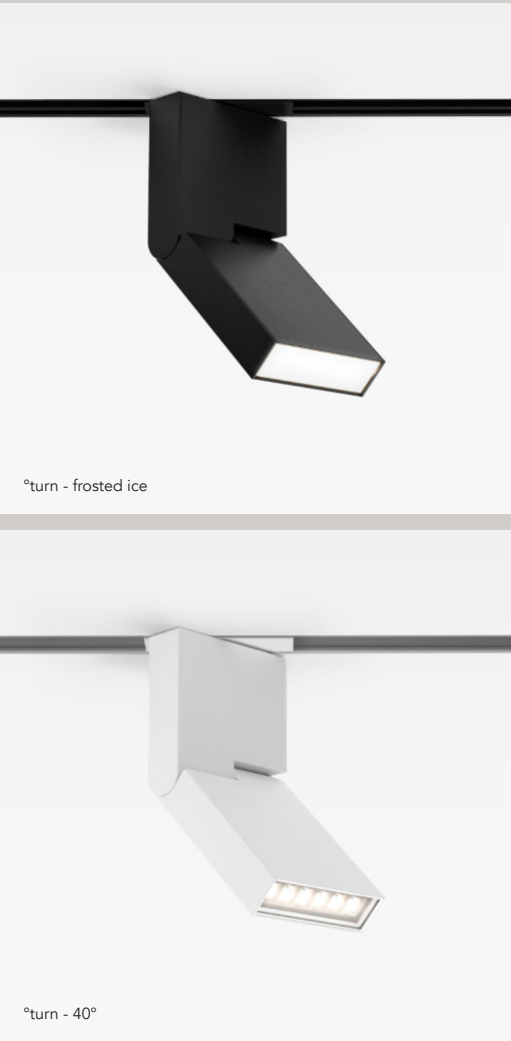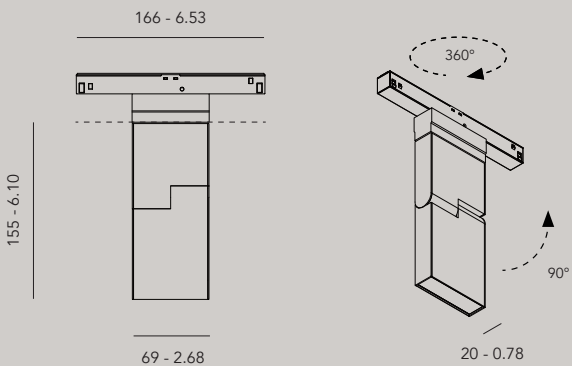

Order Code

10800.AA00.BBBB.CCC.DD turn

10803.AA00.BBBB.CCC.DD turn monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painting custom NCS color	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
001	frosted ice	640lm - 540cd
002	microprism	590lm - 710cd
250	25°	790lm - 2820cd
400	40°	740lm - 1670cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	

Accessories

10103 line S plasterkit turn

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°turn plus

materials

weight

voltage

wattage

ugr

dimming

aluminum / PC

465gr / 1.02lb

48 Vdc

13 W

louvre <19


DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20


CE

RoHS

ErC

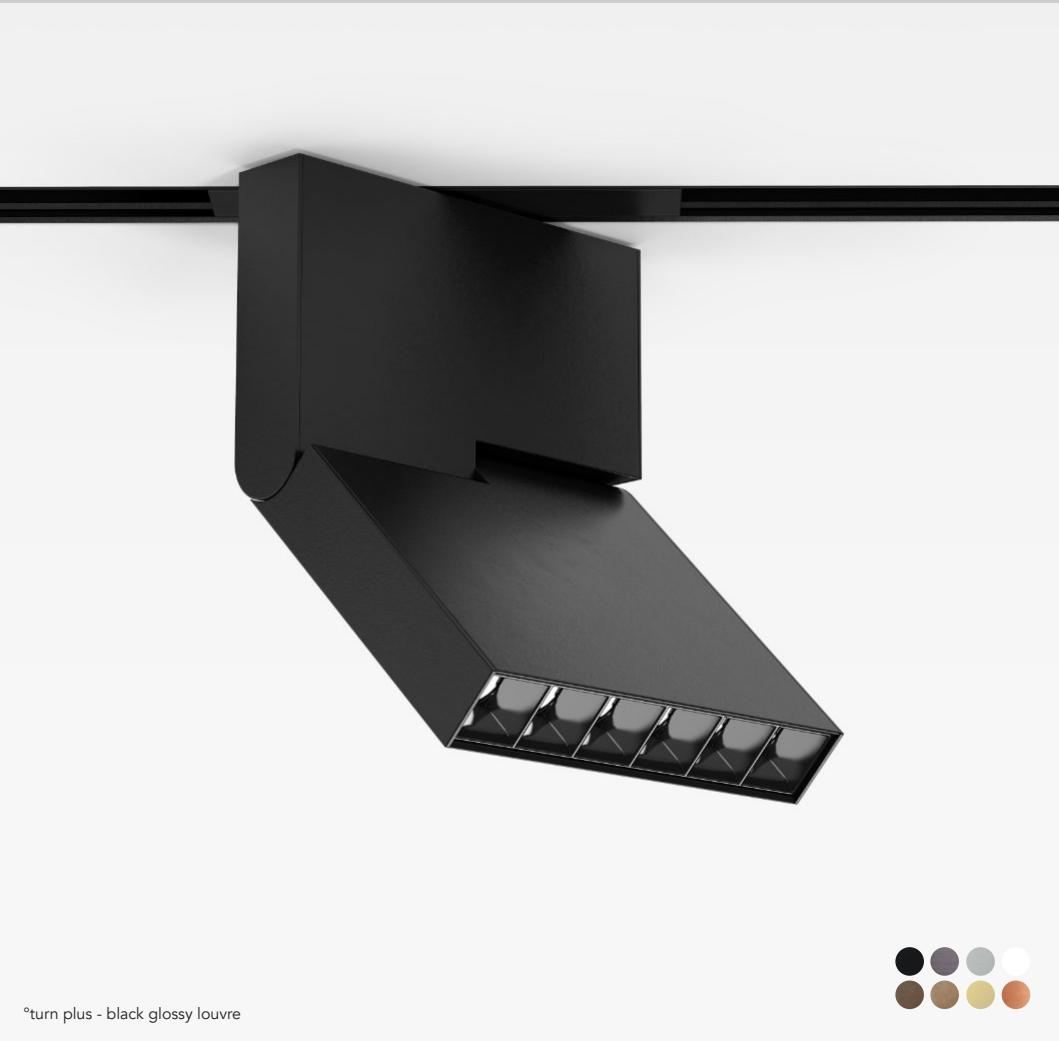

°turn plus - black glossy louvre

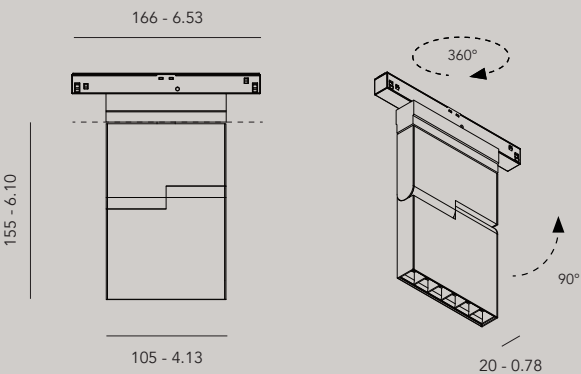

Order Code

10900.AA00.BBBB.CCC.DD turn plus

10903.AA00.BBBB.CCC.DD turn plus monopoint

AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
001	frosted ice	720lm - 620cd
002	microprism	810lm - 1080cd
105	10° black glossy louvre	1195lm - 23250cd
255	25° black glossy louvre	880lm - 3330cd
355	35° black glossy louvre	870lm - 2500cd
108	10° white glossy louvre	1195lm - 23250cd
258	25° white glossy louvre	880lm - 3330cd
358	35° white glossy louvre	870lm - 2500cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

Accessories

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°turn plus - frosted ice

°turn plus - black glossy louvre

°dot

materials

weight

voltage

wattage

dimming


aluminum / PC

100gr / 0.22lb

48 Vdc

2,5 W

DALI, 0-10V, 1-10V, switchDIM, Casambi

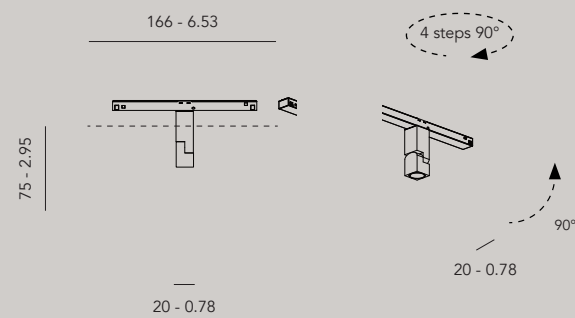

IP20    ENEC



Order Code
11300.AA00.BBBB.CCC.DD dot
11303.AA00.BBBB.CCC.DD dot monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
100	10°	170lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	


Accessories
10106 line S plasterkit dot

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°dot turn

materials	aluminum / PC
weight	186gr / 0.41lb
voltage	48 Vdc
wattage	2,5 W
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

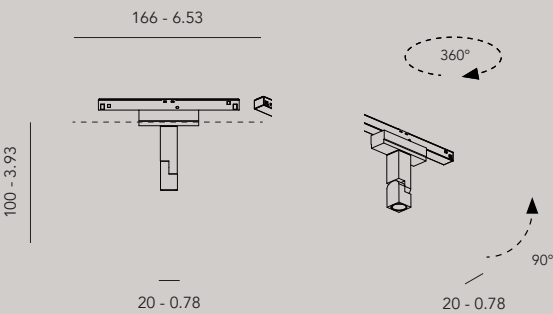

Order Code
11310.AA00.BBBB.CCC.DD dot turn
11313.AA00.BBBB.CCC.DD dot turn monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
100	10°	170lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	


Accessories
10107 line S plasterkit dot turn

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°out

materials	aluminum / PC
weight	510gr / 1.12lb
voltage	48 Vdc
wattage	19W
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

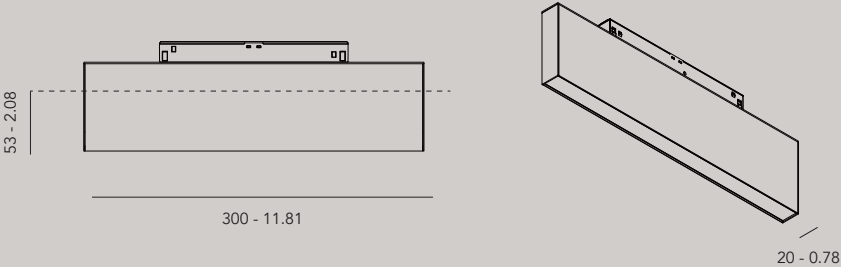

Order Code
11000.AA00.BBBB.CCC.DD out
11002.AA00.BBBB.CCC.DD out high output
11003.AA00.BBBB.CCC.DD out monopoint
11004.AA00.BBBB.CCC.DD out high output monopoint

AA	Finish		
01	black		
02	white		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
27	gun metal alu brushed		
28	nickel alu brushed		
32	copper alu brushed		
03	painted custom NCS color		
BBBB	Light		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		
CA	casambi control		

Accessories
10101 line S plasterkit knick/out


* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°out medium

301

materials	aluminum / PC
weight	360 gr / 0.80 lb
voltage	48 Vdc
wattage	19W
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

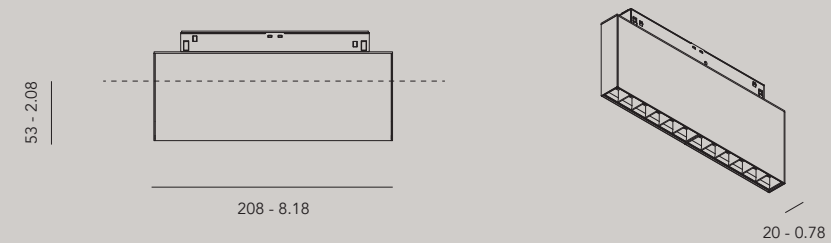

Order Code

11010.AA00.BBBB.CCC.DD out medium
11013.AA00.BBBB.CCC.DD out medium monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9527	cri >95, 2700K	
9530	cri >95, 3000K	
9540	cri >95, 4000K - on request	
CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
255	25° black glossy louvre	1800 lm
355	35° black glossy louvre	1800 lm
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	

Accessories

10113 line S plasterkit knick m & out m

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.


line.s

°bevel

303

materials	aluminum / PC
weight	600gr / 1.32lb
voltage	48 Vdc
wattage	8,2 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

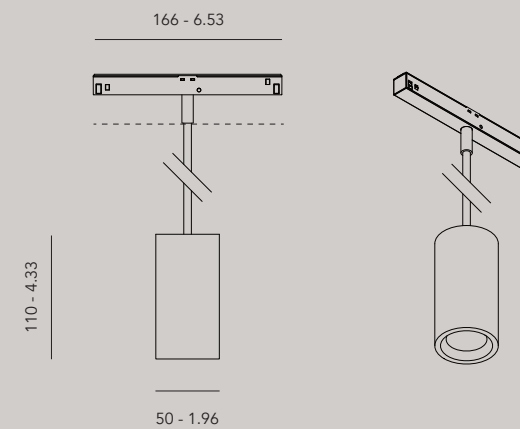

Order Code

20500.AA00.BBBB.CCC.DD bevel

20501.AA00.BBBB.CCC.DD bevel monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
CCC	Optic	Output*
200	20°	670lm - 1550cd
300	30°	700lm - 1070cd
500	50°	690lm - 811cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm



* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°tubu 40

materials	aluminum coated / PC
weight	200gr / 0.44lb
voltage	48 Vdc
wattage	6,7 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

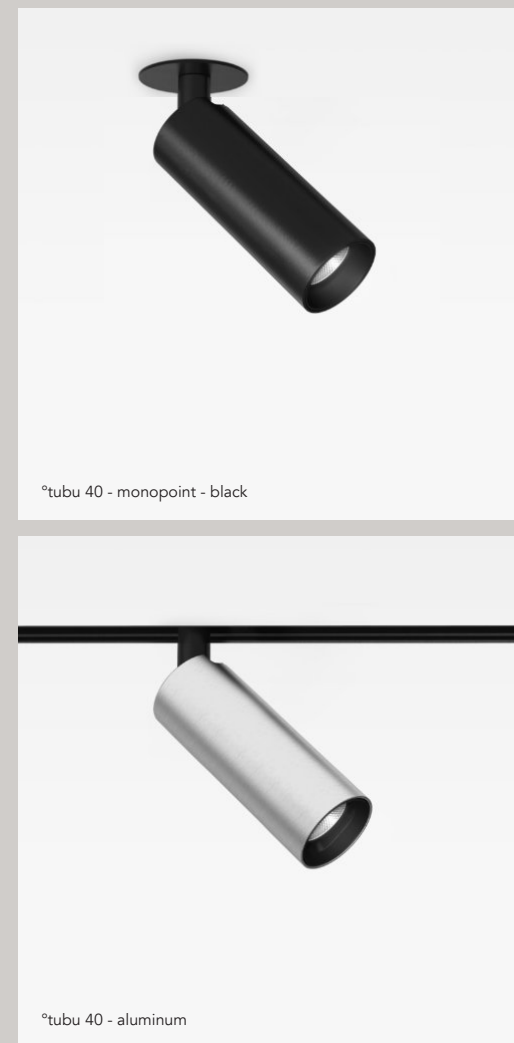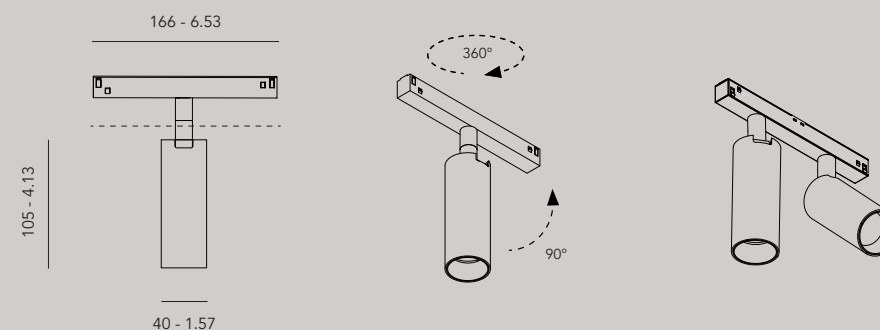

Order Code

11400.AA00.BBBB.CCC.DD tubu 40

11403.AA00.BBBB.CCC.DD tubu 40 monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	
CCC	Optic	Output*
250	25°	420lm - 1970cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	



* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°tubu 60

307

materials	aluminum coated / PC
weight	330gr / 0.72lb
voltage	48 Vdc
wattage	15,4 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    

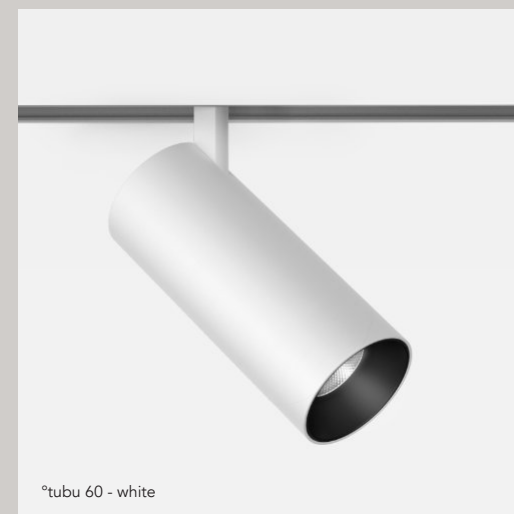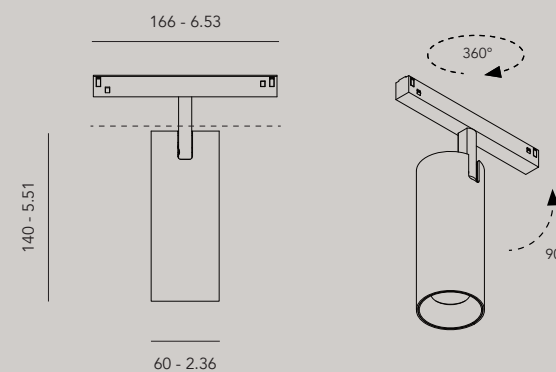

Order Code

11500.AA00.BBBB.CCC.DD tubu 60
11503.AA00.BBBB.CCC.DD tubu 60 monopoint

AA	Finish	
01	black	
02	white	
22	natural alu brushed	
23	brass alu brushed	
25	bronze alu brushed	
26	dark bronze alu brushed	
27	gun metal alu brushed	
28	nickel alu brushed	
32	copper alu brushed	
03	painted custom NCS color	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	
CCC	Optic	Output*
250	25°	1010lm - 2900cd
550	55°	1010lm - 1340cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	
CA	casambi control	



* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°tubu long

309

materials	aluminum coated or chrome / PC
weight	450gr / 0.99lb
voltage	48 Vdc
wattage	4 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi

IP20    ENEC

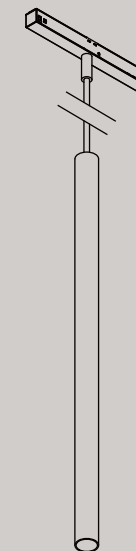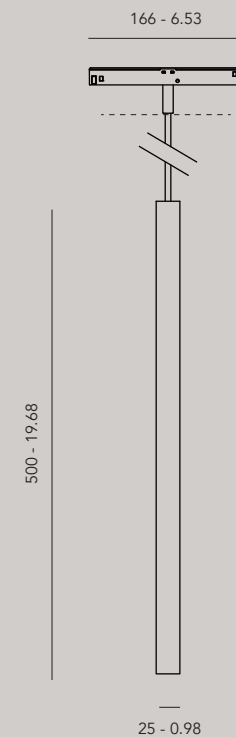

Order Code

11600.AA00.BBBB.CCC.DD tubu long
11603.AA00.BBBB.CCC.DD tubu long monopoint

AA	Finish		
01	black		
02	white		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
27	gun metal alu brushed		
28	nickel alu brushed		
32	copper alu brushed		
03	painted custom NCS color		
BBBB	Light		
9027	cri >90, 2700K		
9030	cri >90, 3000K		
CCC	Optic	Output*	
100	10°	265lm - 670cd	
300	30°	265lm - 670cd	
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		
CA	casambi control		

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

Accessory for monopoint

91004.AA00 recessed canopy



AA	Finish
01	black
02	white
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
27	gun metal alu brushed
28	nickel alu brushed
32	copper alu brushed
03	painted custom NCS color